



# PRODUCT DATA SHEET

2-26® Multi-Purpose Precision Lubricant, 11 Wt Oz  
 No. 02005 | Item# 1003163 | Case# 1003162



Product Description	Plastic safe lubricant, penetrant and corrosion inhibitor that helps prevent electrical malfunctions caused by water penetration, humidity, condensation or corrosion. Restores resistance values and helps stop current leakage.
Applications	Connectors, relays, circuit breakers, transformers, switchgear, motors, generators, controls, instruments, communication assemblies, electronics, alarm systems, starters, tubing, castings, gears, weld rod, wire, fixtures, dies, jigs, shim stock, chucks.
Unit Package Description	16 Ounce Aerosol
Brand	CRC
Generic Description 1	Multi-Purpose Precision Lubricant Plastic Safe
Net Fill	11 Wt Oz
UPC Code	078254020051
Unit Dimensions	7.75H x 2.63W x 2.63D in
Units Per Case	12
Case Dimensions	8.1H x 8.3W x 11.1D in
Cases Per Pallet	133
Case Weight	12 lbs
I 2 of 5 Code	30078254020052
Appearance	Amber Liquid
Base Type	Petroleum Distillate
Flash point (F)	200°F
Flash point (C)	93°C
Flammability Class - CPSC	Flammable
Spec Gravity Concentrate	0.82
Plastic Safe	Yes
Film Type	Thin, Non-Drying
Film Thickness	0.025 to 0.075 MILS
Evaporation Rate	Slow

Last revised: 8/7/2018  
 Page 1 of 2



Customer Care: 800-556-5074  
 Technical Assistance: 800-521-3168  
[www.crcindustries.com](http://www.crcindustries.com)

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



## PRODUCT DATA SHEET



Dielectric Strength	51,300 Volts
Working Temp (F)	Max 250°F
Working Temp (C)	Max 121.1°C
Propellant	Carbon Dioxide
NSF Category Code	H2
NSF Number	017224
Military Specification Number	Not Determined
Aerosol Flammability Level	III
DOT Proper Shipping Name	Aerosols, Flammable, Limited Quantity
VOC % (Consumer Product def)	0
VOC g/L (Consumer Product def)	0
VOC lbs/gal (Consumer Prod def)	0
VOC Category	Multi-Purpose Lubricant
Removal (How To)	Remove with Petroleum Distillates.

Last revised: 8/7/2018  
Page 2 of 2



Customer Care: 800-556-5074  
Technical Assistance: 800-521-3168  
www.crcindustries.com

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.





## PRODUCT DATA SHEET

2-26® Multi-Purpose Precision Lubricant, 11 Wt Oz  
 No. 02005 | Item# 1003163 | Case# 1003162



Product Description	Plastic safe lubricant, penetrant and corrosion inhibitor that helps prevent electrical malfunctions caused by water penetration, humidity, condensation or corrosion. Restores resistance values and helps stop current leakage.
Applications	Connectors, relays, circuit breakers, transformers, switchgear, motors, generators, controls, instruments, communication assemblies, electronics, alarm systems, starters, tubing, castings, gears, weld rod, wire, fixtures, dies, jigs, shim stock, chucks.
Unit Package Description	16 Ounce Aerosol
Brand	CRC
Generic Description 1	Multi-Purpose Precision Lubricant Plastic Safe
Net Fill	11 Wt Oz
UPC Code	078254020051
Unit Dimensions	7.75H x 2.63W x 2.63D in
Units Per Case	12
Case Dimensions	8.1H x 8.3W x 11.1D in
Cases Per Pallet	133
Case Weight	12 lbs
I 2 of 5 Code	30078254020052
Appearance	Amber Liquid
Base Type	Petroleum Distillate
Flash point (F)	200°F
Flash point (C)	93°C
Flammability Class - CPSC	Flammable
Spec Gravity Concentrate	0.82
Plastic Safe	Yes
Film Type	Thin, Non-Drying
Film Thickness	0.025 to 0.075 Mills
Evaporation Rate	Slow

Last revised: 8/7/2018  
 Page 1 of 2



Customer Care: 800-556-5074  
 Technical Assistance: 800-521-3168  
[www.crcindustries.com](http://www.crcindustries.com)

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.




CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



# PRODUCT DATA SHEET



Dielectric Strength	51,300 Volts
Working Temp (F)	Max 250°F
Working Temp (C)	Max 121.1°C
Propellant	Carbon Dioxide
NSF Category Code	H2
NSF Number	017224
Military Specification Number	Not Determined
Aerosol Flammability Level	III
DOT Proper Shipping Name	Aerosols, Flammable, Limited Quantity
VOC % (Consumer Product def)	0
VOC g/L (Consumer Product def)	0
VOC lbs/gal (Consumer Prod def)	0
VOC Category	Multi-Purpose Lubricant
Removal (How To)	Remove with Petroleum Distillates.

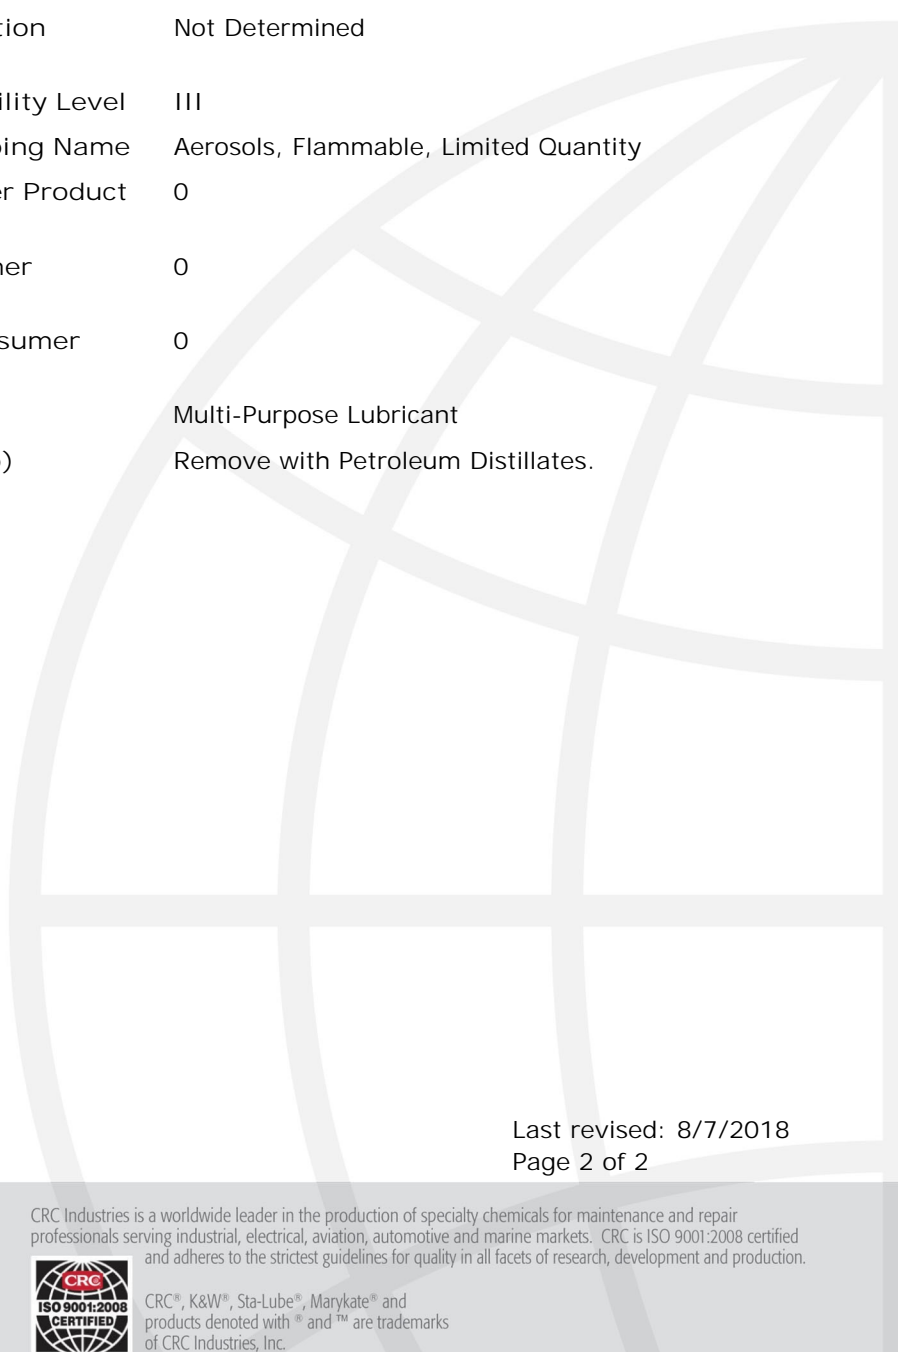

Last revised: 8/7/2018  
Page 2 of 2



Customer Care: 800-556-5074  
Technical Assistance: 800-521-3168  
www.crcindustries.com

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.