

# Metering Equipment

## Contents


<i>Description</i>	<i>Page</i>
<b>Meter Socket Catalog Number Logic</b>	
Catalog Numbering System . . . . .	2
<b>Product Selection by Utility</b>	
Allegheny Power Utility . . . . .	4
Duquesne Light Company Utility . . . . .	5
First Energy (GPU, JCP&L, Penelec & Met Ed) . . . . .	6
Pennsylvania Power & Light (PP&L) . . . . .	7
Philadelphia Electric Company (PECO) . . . . .	8
Atlantic City Electric/Delmarva Utility . . . . .	9
Delaware Electric Co-Op . . . . .	10
<b>Technical Data</b>	
Knockout Drawings . . . . .	11
<b>Meter Packs</b>	
Product Description . . . . .	12
Product Selection . . . . .	12
<b>Main Tenant Circuit Breakers</b>	
Product Description . . . . .	14
Product Selection . . . . .	14
Dimensions and Knockouts . . . . .	15
<b>Accessories</b>	
Meter Packs . . . . .	17



**Group Metering**

## Catalog Numbering System

Table 1. "RS" Group Catalog Numbering System

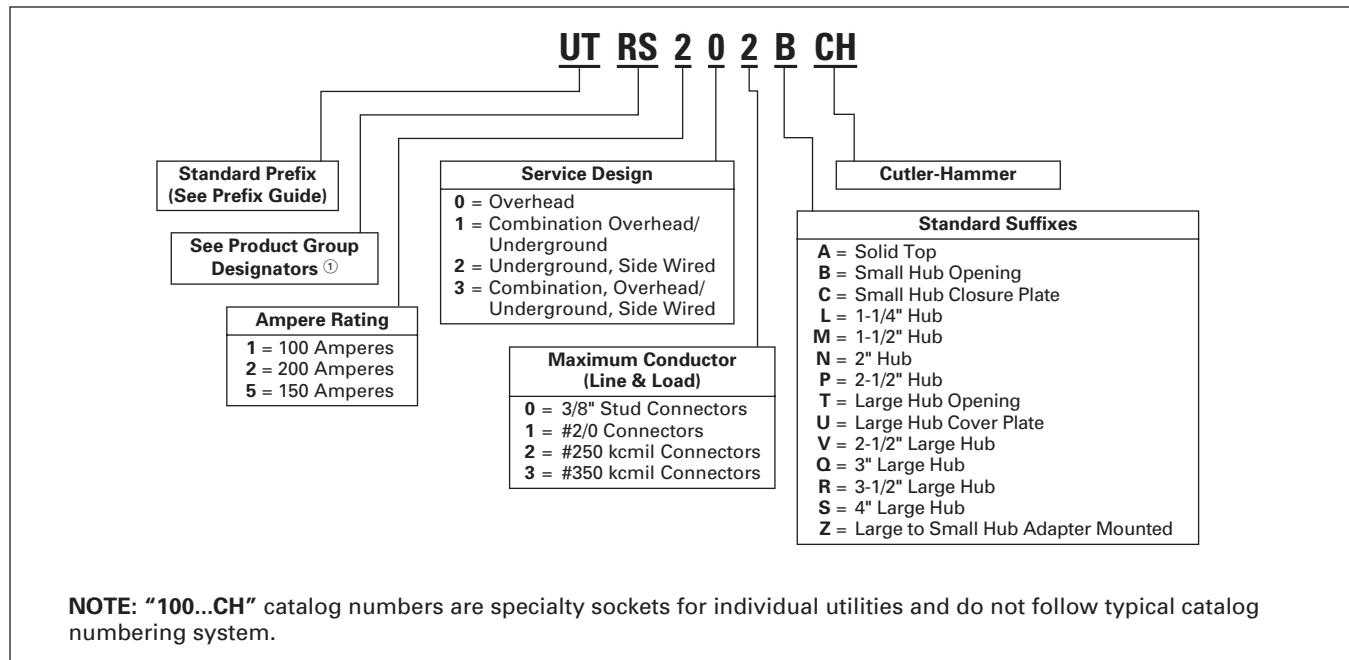

① "RS" Group = Residential Service, Single Position.


**Note:** Some sockets that are built for specific utilities have their own unique catalog numbers. These can be found on the utility selection pages.

## Meter Socket "Prefix" Guide

<b>A</b>	Aluminum enclosure
<b>B</b>	Barrel lock provision, for an exposed INNER-TITE® or Brooks barrel lock; unit includes an internal lock receiver bracket.
<b>F</b>	Barrel lock with guard provision, for a lock guard INNER-TITE or Brooks barrel lock; unit includes an internal lock receiver bracket.
<b>G</b>	Grounded fifth terminal (9 o'clock position)
<b>H</b>	Horn bypass
<b>I</b>	Inhibitor installed in wire connectors
<b>M</b>	Temporary meter cover (waxed cardboard)
<b>N</b>	No sealing ring (applies only to ring style sockets)
<b>R</b>	Ring style socket
<b>S</b>	Aluminum screw type sealing ring (applies only to ring style sockets)
<b>T</b>	Grounding connector (#14 – #2 Cu) for Tri-Plex ground
<b>TT</b>	Two (2) grounding connectors (#14 – #2 Cu) for Quad-Plex ground
<b>U</b>	UL® (Underwriters Laboratories) labeled
<b>Z</b>	5/16" Hex head connector screw in place of slotted (100 amperes only)


**Note:** The "U" prefix is always used first followed by other prefixes required in alphabetical order.

Table 2. "2R-6R" and "2H-6H" Group Catalog Numbering System

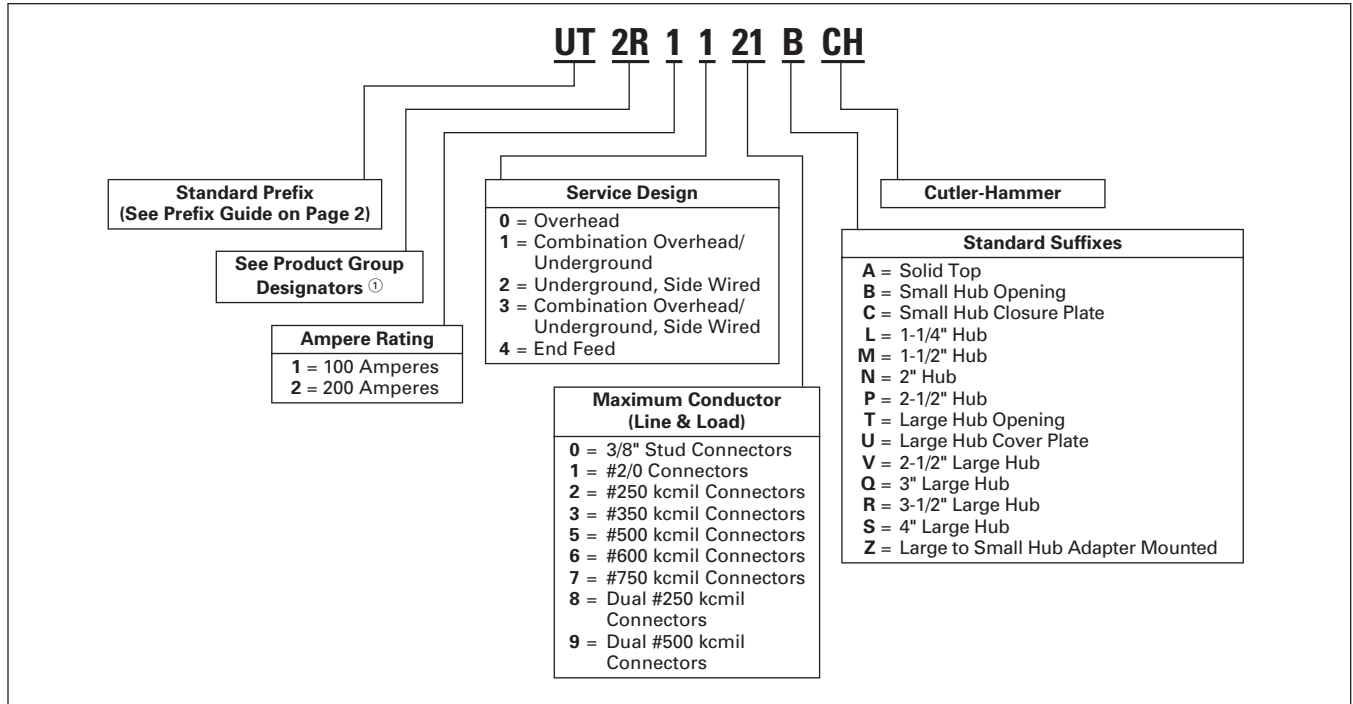

① "2R-6R" Group = Residential Service, Multiple Position.  
"2H-6H" Group = Commercial or Residential Service, Multiple Position.

Table 3. "H" Group Catalog Numbering System

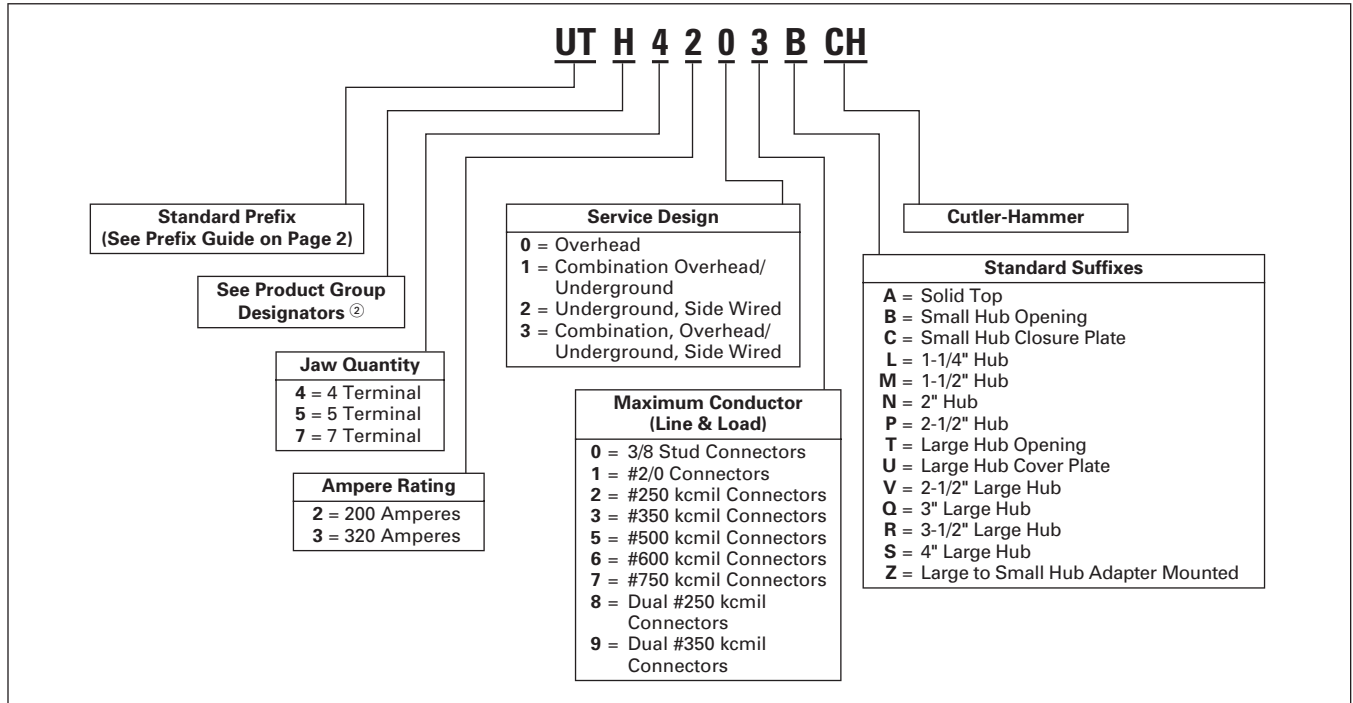


② "H" Group = Commercial or Residential Service, Single Position (lever bypass).

**Note:** "100...CH" catalog numbers are specialty sockets for individual utilities and do not follow typical catalog numbering system.

## Product Selection by Utility

### Allegheny Power Utility

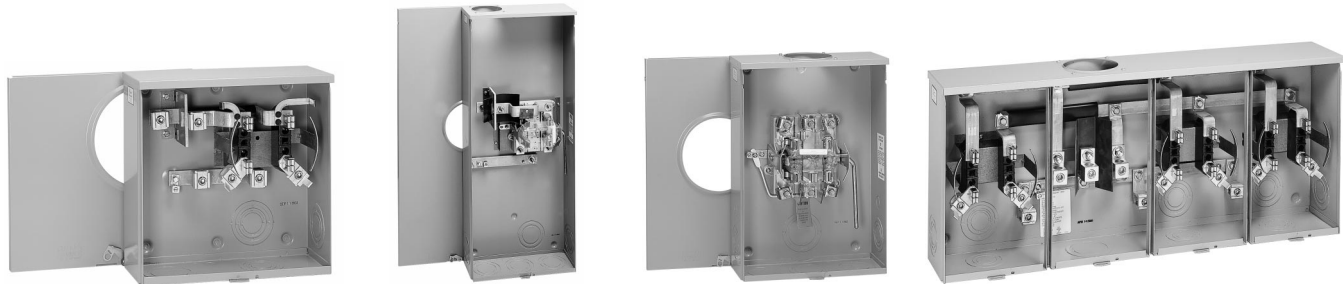

**200 Ampere Single-Position  
Meter Socket (1008941CH)**

**320 Ampere Lever Bypass  
Meter Socket (UTH4330TCH)**

**200 Ampere Lever Bypass  
Meter Socket (UTH7213TCH)**

**200 Ampere Multi-Position  
Meter Socket (UHT3R2332TCH)**

**Table 4. Allegheny Power Utility — Meter Socket Approval List**

Cutler-Hammer Catalog Number	Description	Dimensions			Connections		Concentric Knockouts (See Page 11)				
		H	W	D	Line	Load	1	2	3	4	5
<b>100 Ampere Single-Position — Residential</b>											
UHTSR101BCH	100 A, 4 Terminal, SM Hub Open, OH/UG ①②	10.88	8.00	3.50	#8 – 2/0	#8 – 2/0	1.50	1.50	2.00	1.25	—
<b>200 Ampere Single-Position — Residential</b>											
1008941CH	200 A, 4 Terminal, Solid Top, UG, Offset, Left Feed ①②	17.13	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	3.00	.50
1008940CH	200 A, 4 Terminal, Solid Top, UG, Offset, Right Feed ①②	17.13	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	3.00	.50
UHTSR213BCH	200 A, 4 Terminal, SM Hub Open, OH ①②	15.00	11.00	4.38	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	2.50	2.50	.50
<b>200 Ampere Single-Position — Commercial w/ Lever Bypass</b>											
UTH7213B or TCH	200 A, 7 Terminal, SM or LG Hub Open, OH/UG ①③	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
<b>320 Ampere Commercial — Residential w/ Lever Bypass</b>											
UTH4330TCH	320 A, 4 Terminal, LG Hub Open, OH/UG ①③	36.63	15.00	5.69	3/8" Stud	3/8" Stud	3.50	3.50	3.50	3.50	.50
UTH7330TCH	320 A, 7 Terminal, LG Hub Open, OH/UG ①③	39.88	20.00	6.50	3/8" Stud	3/8" Stud	4.00	4.00	4.00	4.00	.50
<b>100 Ampere Multi-Position — Residential Single-Phase</b>											
UHT2R1121BCH	100 A, 2 Position, SM Hub Open, OH, Center Feed ①②	14.13	24.31	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UHT3R1121BCH	100 A, 3 Position, SM Hub Open, OH, Center Feed ①②	14.13	32.47	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UHT4R1121BCH	100 A, 4 Position, SM Hub Open, OH, Center Feed ①②	14.13	40.63	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UHT5R1121BCH	100 A, 5 Position, SM Hub Open, OH, Center Feed ①②	14.13	48.78	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UHT6R1131BCH	100 A, 6 Position, SM Hub Open, OH, Center Feed ①②	14.13	56.94	4.50	#6 – 350 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UHT2R1421BCH	100 A, 2 Position, SM Hub Open, OH, End Feed ①②	14.13	20.16	5.38	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	3.00	2.50	.50
UHT3R1421BCH	100 A, 3 Position, SM Hub Open, OH, End Feed ①②	14.13	28.31	5.38	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	3.00	2.50	.50
UHT4R1421BCH	100 A, 4 Position, SM Hub Open, OH, End Feed ①②	14.13	36.47	5.38	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	3.00	2.50	.50
UHT5R1421BCH	100 A, 5 Position, SM Hub Open, OH, End Feed ①②	14.13	44.63	5.38	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	3.00	2.50	.50
UHT6R1431BCH	100 A, 6 Position, SM Hub Open, OH, End Feed ①②	14.13	52.78	5.38	#6 – 350 kcmil	#8 – 2/0	2.50	2.50	3.00	2.50	.50
<b>200 Ampere Multi-Position — Residential Single-Phase</b>											
UHT2R2332TCH	200 A, 2 Position, LG Hub Open, OH, Center Feed ①②	14.13	24.31	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UHT3R2332TCH	200 A, 3 Position, LG Hub Open, OH, Center Feed ①②	14.13	32.47	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UHT4R2352TCH	200 A, 4 Position, LG Hub Open, OH, Center Feed ①②	14.13	40.63	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UHT5R2392TTCH	200 A, 5 Position, LG Hub Open, OH, Center Feed ①②	14.13	54.78	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UHT6R2392TTCH	200 A, 6 Position, LG Hub Open, OH, Center Feed ①②	14.13	62.94	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75

① Ground connection.

② Horn bypass.

③ Lever bypass.

**Note:** "100...CH" catalog numbers are specialty sockets for individual utilities and do not follow typical catalog numbering system.

**Table 5. Cutler-Hammer Meter Socket Accessories**

Cutler-Hammer Catalog Number	Description	Cutler-Hammer Catalog Number	Description
ARP00003CH1	1.00-Inch Hub	ARP00008CH	Small Hub Closure Plate — Aluminum
ARP00004CH12	1.25-Inch Hub	ARP00016CHB	Large Hub Closure Plate
ARP00005CH15	1.50-Inch Hub	ARP00015CHAP	Hub Adapter Plate — Large to Small
ARP00006CH2	2.00-Inch Hub — Small Opening	ARP00035CHJ	Replacement — Plug-in Fifth Terminal (R and RS Models Only)
ARP00007CH25	2.50-Inch Hub — Small Opening	ARP00039CH	Replacement Block Assembly for 100 A Sockets — 2/0 Maximum
ARP00017CH2	2.00-Inch Hub — Large Opening	ARP00048CH	Replacement Block Assembly for 200 A Sockets — 350 Maximum
ARP00018CH25	2.50-Inch Hub — Large Opening	ARP00354CH	Replacement Block Assembly for 150 A Sockets — 250 Maximum
ARP00019CH3	3.00-Inch Hub — Large Opening	ARP00129CH	#4 – 600 kcmil Lug
ARP00021CH4	4.00-Inch Hub — Large Opening	ARP00427CH	#6 – 350 kcmil Dual Lug
ARP00002CHB	Small Hub Closure Plate	ARP00119CH	#6 – 350 kcmil Lug

Duquesne Light Company Utility



100 Ampere Single-Position Meter Socket (URS101BDQCH)



200 Ampere Single-Position Meter Socket (1008827CH)



200 Ampere Multi-Position Meter Socket (U3R2332TDQCH)

Table 6. Duquesne Light Company Utility — Meter Socket Approval List

Cutler-Hammer Catalog Number	Description	Dimensions			Connections		Concentric Knockouts (See Page 11)				
		H	W	D	Line	Load	1	2	3	4	5
<b>100 – 125 Ampere Single-Position — Residential Single-Phase</b>											
URS101BDQCH	125 A, 4 Terminal, SM Hub Open, OH ①	10.88	8.00	3.50	#8 – 2/0	#8 – 2/0	1.50	1.50	2.00	1.25	—
<b>200 Ampere Single-Position — Residential Single-Phase</b>											
URS202BDQCH	200 A, 4 Terminal, SM Hub Open, OH ①	14.00	8.00	4.38	#8 – 250 kcmil	#8 – 250 kcmil	2.50	2.50	2.50	—	.50
1008717CH	200 A, 4 Terminal, Solid Top, UG ①	15.00	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	3.00	3.00	3.00	3.00	.50
1008819CH	200 A, 4 Terminal, Solid Top, UG, Offset Right Feed ①	13.00	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	3.00	.50
1008827CH	200 A, 4 Terminal, Solid Top, UG, Offset Left Feed ①	13.00	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	3.00	.50
<b>150 Ampere Multi-Position — Residential Single-Phase</b>											
U2R5432BDQCH	150 A, 2 Position, SM Hub Open, OH/UG, End Feed ①	14.13	20.16	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
U3R5432BDQCH	150 A, 3 Position, SM Hub Open, OH/UG, End Feed ①	14.13	20.16	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
<b>200 Ampere Multi-Position — Residential Single-Phase</b>											
U2R2332TDQCH	200 A, 2 Position, LG Hub Open, OH, Center Feed ①	14.13	24.31	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
U3R2332TDQCH	200 A, 3 Position, LG Hub Open, OH, Center Feed ①	14.13	32.47	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
U4R2352TDQCH	200 A, 4 Position, LG Hub Open, OH, Center Feed ①	14.13	40.63	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
U5R2392TTDQCH	200 A, 5 Position, LG Hub Open, OH, Center Feed ①	14.13	54.78	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
U6R2392TTDQCH	200 A, 6 Position, LG Hub Open, OH, Center Feed ①	14.13	62.94	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75

① Horn bypass.

Note: “100...CH” catalog numbers are specialty sockets for individual utilities and do not follow typical catalog numbering system.

Table 7. Cutler-Hammer Meter Socket Accessories


Cutler-Hammer Catalog Number	Description	Cutler-Hammer Catalog Number	Description
ARP00003CH1	1.00-Inch Hub	ARP00008CH	Small Hub Closure Plate — Aluminum
ARP00004CH12	1.25-Inch Hub	ARP00016CHB	Large Hub Closure Plate
ARP00005CH15	1.50-Inch Hub	ARP00015CHAP	Hub Adapter Plate — Large to Small
ARP00006CH2	2.00-Inch Hub — Small Opening	ARP00035CHJ	Replacement — Plug-in Fifth Terminal (R and RS Models Only)
ARP00007CH25	2.50-Inch Hub — Small Opening	ARP00039CH	Replacement Block Assembly for 100 A Sockets — 2/0 Maximum
ARP00017CH2	2.00-Inch Hub — Large Opening	ARP00048CH	Replacement Block Assembly for 200 A Sockets — 350 Maximum
ARP00018CH25	2.50-Inch Hub — Large Opening	ARP00354CH	Replacement Block Assembly for 150 A Sockets — 250 Maximum
ARP00019CH3	3.00-Inch Hub — Large Opening	ARP00129CH	#4 – 600 kcmil Lug
ARP00021CH4	4.00-Inch Hub — Large Opening	ARP00427CH	#6 – 350 kcmil Dual Lug
ARP00002CHB	Small Hub Closure Plate	ARP00119CH	#6 – 350 kcmil Lug

## Product Selection by Utility

### First Energy (GPU, JCP&L, Penelec & Met Ed)



100 Ampere Single-Position  
Meter Socket (1008947CH)



200 Ampere Single-Position  
Meter Socket (UHTRS223ACH)



320 Ampere Lever Bypass  
Meter Socket (1008948CH)



200 Ampere Lever Bypass  
Meter Socket (UTH7213TCH)

Table 8. First Energy (GPU, JCP&L, Penelec & Met Ed) — Meter Socket Approval List

Cutler-Hammer Catalog Number	Description	Dimensions			Connections		Concentric Knockouts (See Page 11)				
		H	W	D	Line	Load	1	2	3	4	5
<b>100 – 125 Ampere Single-Position — Residential</b>											
1008947CH	125 A, 4 Terminal, SM Hub Open, OH/UG ①②	10.88	8.00	3.50	#8 – 2/0	#8 – 2/0	1.50	1.50	2.00	1.25	—
<b>200 Ampere Single-Position — Residential</b>											
UHTRS202BCH ③	200 A, 4 Terminal, SM Hub Open, OH ①②	14.00	8.00	4.38	#8 – 250 kcmil	#8 – 250 kcmil	2.50	2.50	2.50	—	.50
UHTRS213BCH ③	200 A, 4 Terminal, SM Hub Open, OH/UG ①②	15.00	11.00	4.38	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	2.50	2.50	.50
UHTRS223ACH ③	200 A, 4 Terminal, Solid Top, UG, Meter Right ①②	13.00	13.00	5.00	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	2.50	.50
UBHTRS223ARHCH ③	200 A, 4 Terminal, Solid Top, UG, Meter Left ①②	13.00	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	2.50	.50
<b>200 Ampere Single-Position — Commercial w/ Lever Bypass</b>											
UTH4213B or TCH	200 A, 4 Terminal, SM or LG Hub Open, OH/UG ①④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
UTH5213B or TCH	200 A, 5 Terminal, SM or LG Hub Open, OH/UG ①④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
UTH7213B or TCH	200 A, 7 Terminal, SM or LG Hub Open, OH/UG ①④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
<b>320 Ampere Commercial — Residential w/ Lever Bypass</b>											
1008948CH	320 A, 4 Terminal, LG Hub Open, OH/UG ①④⑤	36.63	15.00	5.69	3/8" Stud	3/8" Stud	3.50	3.50	3.50	3.50	.50
1008949CH	320 A, 5 Terminal, LG Hub Open, OH/UG ①④⑤	39.88	20.00	6.50	3/8" Stud	3/8" Stud	4.00	4.00	4.00	4.00	.50
1008950CH	320 A, 7 Terminal, LG Hub Open, OH/UG ①④⑤	39.88	20.00	6.50	3/8" Stud	3/8" Stud	4.00	4.00	4.00	4.00	.50
<b>100 Ampere Multi-Position — Residential Single-Phase</b>											
1008951CH	100 A, 2 Position, SM Hub Open, OH/UG ①②⑥	14.13	24.31	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1008952CH	100 A, 3 Position, SM Hub Open, OH/UG ①②⑥	14.13	32.47	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1008953CH	100 A, 4 Position, SM Hub Open, OH/UG ①②⑥	14.13	40.63	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1008954CH	100 A, 5 Position, SM Hub Open, OH/UG ①②⑥	14.13	48.78	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1008955CH	100 A, 6 Position, SM Hub Open, OH/UG ①②⑥	14.13	56.94	4.50	#6 – 350 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
<b>200 Ampere Multi-Position — Residential Single-Phase</b>											
UHT2R2332TCH	200 A, 2 Position, LG Hub Open, OH/UG ①②⑥	14.13	24.31	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UHT3R2332TCH	200 A, 3 Position, LG Hub Open, OH/UG ①②⑥	14.13	32.47	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UHT4R2352TCH	200 A, 4 Position, LG Hub Open, OH/UG ①②⑥	14.13	40.63	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UHT5R2392TTCH	200 A, 5 Position, LG Hub Open, OH/UG ①②⑥	14.13	54.78	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UHT6R2392TTCH	200 A, 6 Position, LG Hub Open, OH/UG ①②⑥	14.13	62.94	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75

① Ground connection.

② Horn bypass.

③ Units are able to be converted to 5 terminal single-phase using field-installable kit ARP00035CHJ.

④ Lever bypass.

⑤ Anti-inversion clip installed.

⑥ Center feed.

**Note:** "100...CH" catalog numbers are specialty sockets for individual utilities and do not follow typical catalog numbering system.

Table 9. Cutler-Hammer Meter Socket Accessories

Cutler-Hammer Catalog Number	Description	Cutler-Hammer Catalog Number	Description
ARP00003CH1	1.00-Inch Hub	ARP00008CH	Small Hub Closure Plate — Aluminum
ARP00004CH12	1.25-Inch Hub	ARP00016CHB	Large Hub Closure Plate
ARP00005CH15	1.50-Inch Hub	ARP00015CHAP	Hub Adapter Plate — Large to Small
ARP00006CH2	2.00-Inch Hub — Small Opening	ARP00035CHJ	Replacement — Plug-in Fifth Terminal (R and RS Models Only)
ARP00007CH25	2.50-Inch Hub — Small Opening	ARP00039CH	Replacement Block Assembly for 100 A Sockets — 2/0 Maximum
ARP00017CH2	2.00-Inch Hub — Large Opening	ARP00048CH	Replacement Block Assembly for 200 A Sockets — 350 Maximum
ARP00018CH25	2.50-Inch Hub — Large Opening	ARP00354CH	Replacement Block Assembly for 150 A Sockets — 250 Maximum
ARP00019CH3	3.00-Inch Hub — Large Opening	ARP00129CH	#4 – 600 kcmil Lug
ARP00021CH4	4.00-Inch Hub — Large Opening	ARP00427CH	#6 – 350 kcmil Dual Lug
ARP00002CHB	Small Hub Closure Plate	ARP00119CH	#6 – 350 kcmil Lug



Pennsylvania Power & Light (PP&L)

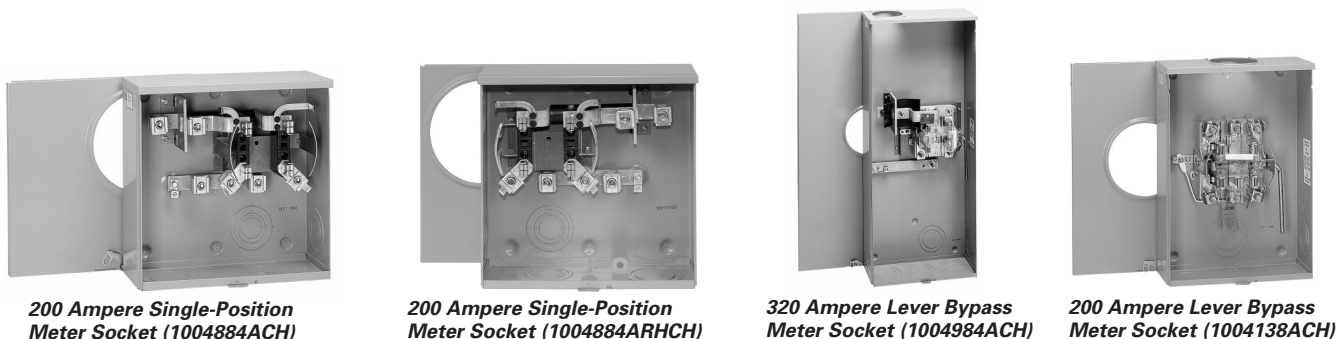


Table 10. Pennsylvania Power & Light (PP&L) — Meter Socket Approval List

Cutler-Hammer Catalog Number	Description	Dimensions			Connections		Concentric Knockouts (See Page 11)				
		H	W	D	Line	Load	1	2	3	4	5
<b>100 Ampere Single-Position — Residential</b>											
1004162ACH	100 A, 4 Terminal, SM Hub Open, OH ①②	10.88	8.00	3.50	#8 – 2/0	#8 – 2/0	1.50	1.50	2.00	1.25	—
<b>200 Ampere Single-Position — Residential</b>											
1004161ACH	200 A, 4 Terminal, SM Hub Open, OH ①②	14.00	8.00	4.38	#8 – 250 kcmil	#8 – 250 kcmil	2.50	2.50	2.50	—	.50
1004884ACH	200 A, 4 Terminal, Solid Top, UG, Meter Right ①②③	13.00	13.00	5.00	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	2.50	.50
1004884ARHCH	200 A, 4 Terminal, Solid Top, UG, Meter Left ①②③	13.00	13.13	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	2.50	.50
1004159ACH	200 A, 4 Terminal, SM Hub Cover Plate, OH/UG ①②	15.00	11.00	4.38	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	2.50	2.50	.50
<b>200 Ampere Single-Position — Commercial w/ Lever Bypass</b>											
1004137ACH	200 A, 5 Terminal, SM Hub Open, OH/UG ④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
1004138ACH	200 A, 7 Terminal, LG Hub Open, OH/UG ④	34.50	15.00	5.69	#4 – 500 kcmil	#4 – 500 kcmil	3.50	3.50	3.50	3.50	.50
<b>320 Ampere Commercial — Residential w/ Lever Bypass</b>											
1004984ACH	320 A, 4 Terminal, LG Hub Open, OH/UG ④	36.63	15.00	5.69	3/8" Stud	3/8" Stud	3.50	3.50	3.50	3.50	.50
1008543CH	320 A, 7 Terminal, LG Hub Closure Plate, UG ④	39.88	20.00	6.50	⑤	⑤	4.00	4.00	4.00	4.00	.50
<b>100 Ampere Multi-Position — Residential Single-Phase</b>											
1004426ACH	100 A, 2 Position, SM Hub Open, OH/UG ①②⑥	14.13	24.31	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1004427ACH	100 A, 3 Position, SM Hub Open, OH/UG ①②⑥	14.13	32.47	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1004428ACH	100 A, 4 Position, SM Hub Open, OH/UG ①②⑥	14.13	40.63	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1004429ACH	100 A, 5 Position, SM Hub Open, OH/UG ①②⑥	14.13	48.78	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1004430ACH	100 A, 6 Position, SM Hub Open, OH/UG ①②⑥	14.13	56.94	4.50	#6 – 350 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
<b>200 Ampere Multi-Position — Residential Single-Phase</b>											
1004401BCH	200 A, 2 Position, LG Hub Open, OH/UG ①②⑥	14.13	24.31	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
1004404BCH	200 A, 3 Position, LG Hub Open, OH/UG ①②⑥	14.13	32.47	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
1004438BCH	200 A, 4 Position, LG Hub Open, OH/UG ①②⑥	14.13	40.63	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
1004439BCH	200 A, 5 Position, LG Hub Open, OH/UG ①②⑥	14.13	54.78	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
1004440BCH	200 A, 6 Position, LG Hub Open, OH/UG ①②⑥	14.13	62.94	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
<b>400 – 600 Ampere — Residential/Commercial K Base Sockets — Three-Phase</b>											
CH9564K7	480/600 A, 7 Terminal, OH/UG, LG Hub Opening ⑦	43.00	20.00	6.10	.50 – 20 Stud	.50 – 20 Stud	4.00	4.00	4.00	4.00	.75
CH9802K7	480/600 A, 7 Terminal, OH/UG, LG Hub Cover Plate ⑦	37.60	26.00	6.10	.50 – 20 Stud	.50 – 20 Stud	4.00	4.00	4.00	4.00	.75

- ① Ground connection.
- ② Horn bypass.
- ③ Offset design.
- ④ Lever bypass.
- ⑤ Single #600 kcmil/Dual #250 kcmil.
- ⑥ Center fed.
- ⑦ Steel enclosure.

Note: "100...CH" catalog numbers are specialty sockets for individual utilities and do not follow typical catalog numbering system.

Table 11. Cutler-Hammer Meter Socket Accessories

Cutler-Hammer Catalog Number	Description	Cutler-Hammer Catalog Number	Description
ARP00003CH1	1.00-Inch Hub	ARP00008CH	Small Hub Closure Plate — Aluminum
ARP00004CH12	1.25-Inch Hub	ARP00016CHB	Large Hub Closure Plate
ARP00005CH15	1.50-Inch Hub	ARP00015CHAP	Hub Adapter Plate — Large to Small
ARP00006CH2	2.00-Inch Hub — Small Opening	ARP00035CHJ	Replacement — Plug-in Fifth Terminal (R and RS Models Only)
ARP00007CH25	2.50-Inch Hub — Small Opening	ARP00039CH	Replacement Block Assembly for 100 A Sockets — 2/0 Maximum
ARP00017CH2	2.00-Inch Hub — Large Opening	ARP00048CH	Replacement Block Assembly for 200 A Sockets — 350 Maximum
ARP00018CH25	2.50-Inch Hub — Large Opening	ARP00354CH	Replacement Block Assembly for 150 A Sockets — 250 Maximum
ARP00019CH3	3.00-Inch Hub — Large Opening	ARP00129CH	#4 – 600 kcmil Lug
ARP00021CH4	4.00-Inch Hub — Large Opening	ARP00427CH	#6 – 350 kcmil Dual Lug
ARP00002CHB	Small Hub Closure Plate	ARP00119CH	#6 – 350 kcmil Lug

## Product Selection by Utility


### Philadelphia Electric Company (PECO)



100 Ampere Single-Position  
Meter Socket (UBHRS101BCH)



200 Ampere Single-Position  
Meter Socket (UBHRS223ACH)



200 Ampere Single-Position Meter  
Socket (UBHTRS223ARHCH)



320 Ampere Lever Bypass  
Meter Socket (UBH7213TCH)

Table 12. Philadelphia Electric Company (PECO) — Meter Socket Approval List

Cutler-Hammer Catalog Number	Description	Dimensions			Connections		Concentric Knockouts (See Page 11)				
		H	W	D	Line	Load	1	2	3	4	5
<b>100 – 125 Ampere Single-Position — Residential Single-Phase</b>											
UBHRS101BCH	125 A, 4 Terminal SM Hub Open, OH ①②	10.88	8.00	3.50	#8 – 2/0	#8 – 2/0	1.50	1.50	2.00	1.25	—
<b>200 Ampere Single-Position — Residential Single-Phase</b>											
UBHRS202BCH	200 A, 4 Terminal, SM Hub Open, OH ①②	14.00	8.00	4.38	#8 – 250 kcmil	#8 – 250 kcmil	2.50	2.50	2.50	—	.50
UBHRS212CCH	200 A, 4 Terminal, SM Hub Cover Plate, UG ①②	14.00	11.00	4.38	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	2.50	.50
UBHRS223ACH	200 A, 4 Terminal, Offset, UG, Meter Right ①②③	13.00	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	2.50	.50
UBHTRS223ARHCH	200 A, 4 Terminal, Offset, UG, Meter Left ①②③	13.00	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	2.50	2.50	.50
<b>200 Ampere Single-Position — Commercial w/ Lever Bypass</b>											
UBH7213TCH	200 A, 7 Terminal, LG Hub Open, OH/UG ①④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
UBC7213BCH	200 A, 7 Terminal, LG Hub Open, OH/UG ①④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
<b>320 Ampere Commercial — Residential w/ Lever Bypass</b>											
1008435CH	320 A, 4 Terminal, UG, Ground Connection ①③④	26.00	15.00	5.69	#4 – 600 kcmil	#4 – 600 kcmil	3.50	3.50	3.50	3.50	.50
<b>100 Ampere Multi-Position Sockets — Residential Single-Phase</b>											
UBH2R1121BCH	100 A, 2 Position, SM Hub Open, OH/UG ①②⑤	14.13	24.31	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UBH3R1121BCH	100 A, 3 Position, SM Hub Open, OH/UG ①②⑤	14.13	32.47	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UBH4R1121BCH	100 A, 4 Position, SM Hub Open, OH/UG ①②⑤	14.13	40.63	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UBH5R1121BCH	100 A, 5 Position, SM Hub Open, OH/UG ①②⑤	14.13	48.78	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UBH6R1131BCH	100 A, 6 Position, SM Hub Open, OH/UG ①②⑤	14.13	56.94	4.50	#6 – 350 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
<b>200 Ampere Multi-Position Sockets — Residential Single-Phase</b>											
UBH2R2332TCH	200 A, 2 Position, LG Hub Open, OH/UG ①②⑤	14.13	24.31	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UBH3R2332TCH	200 A, 3 Position, LG Hub Open, OH/UG ①②⑤	14.13	32.47	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UBH4R2352TCH	200 A, 4 Position, LG Hub Open, OH/UG ①②⑤	14.13	40.63	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UBH5R2392TTCH	200 A, 5 Position, LG Hub Open, OH/UG ①②⑤	14.13	54.78	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UBH6R2392TTCH	200 A, 6 Position, LG Hub Open, OH/UG ①②⑤	14.13	62.94	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75

① Barrel lock provision.

② Horn bypass.

③ Solid top.

④ Lever bypass.

⑤ Center fed.

Note: "100...CH" catalog numbers are specialty sockets for individual utilities and do not follow typical catalog numbering system.

Table 13. Cutler-Hammer Meter Socket Accessories

Cutler-Hammer Catalog Number	Description	Cutler-Hammer Catalog Number	Description
ARP00003CH1	1.00-Inch Hub	ARP00008CH	Small Hub Closure Plate — Aluminum
ARP00004CH12	1.25-Inch Hub	ARP00016CHB	Large Hub Closure Plate
ARP00005CH15	1.50-Inch Hub	ARP00015CHAP	Hub Adapter Plate — Large to Small
ARP00006CH2	2.00-Inch Hub — Small Opening	ARP00035CHJ	Replacement — Plug-in Fifth Terminal (R and RS Models Only)
ARP00007CH25	2.50-Inch Hub — Small Opening	ARP00039CH	Replacement Block Assembly for 100 A Sockets — 2/0 Maximum
ARP00017CH2	2.00-Inch Hub — Large Opening	ARP00048CH	Replacement Block Assembly for 200 A Sockets — 350 Maximum
ARP00018CH25	2.50-Inch Hub — Large Opening	ARP000354CH	Replacement Block Assembly for 150 A Sockets — 250 Maximum
ARP00019CH3	3.00-Inch Hub — Large Opening	ARP00129CH	#4 – 600 kcmil Lug
ARP00021CH4	4.00-Inch Hub — Large Opening	ARP00427CH	#6 – 350 kcmil Dual Lug
ARP00002CHB	Small Hub Closure Plate	ARP00119CH	#6 – 350 kcmil Lug



Atlantic City Electric/Delmarva Utility




200 Ampere Single-Position Meter Socket (UHIRS213BCVCH)



200 Ampere Single-Position Meter Socket



320 Ampere Lever Bypass Meter Socket (1009444CH)



200 Ampere Lever Bypass Meter Socket (UIH5213UCVCH)

Table 14. Atlantic City Electric/Delmarva Utility — Meter Socket Approval List

Cutler-Hammer Catalog Number	Description	Dimensions			Connections		Concentric Knockouts (See Page 11)				
		H	W	D	Line	Load	1	2	3	4	5
<b>200 Ampere Single-Position — Residential Single-Phase</b>											
UHIRS213BCVCH	200 A, 5 Terminal, SM Hub Open, OH ①②③	15.00	11.00	4.38	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	2.50	—	.50
UHIRS223ACVCH	200 A, 5 Terminal, SM Hub Cover Plate, UG ①②③	13.00	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	2.50	.50
<b>200 Ampere Single-Position — Commercial w/ Lever Bypass</b>											
UIH5213UCVCH	200 A, 5 Terminal, SM Hub Closure Plate OH/UG ①③④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
UIH7213UCVCH	200 A, 7 Terminal, LG Hub Closure Plate OH/UG ①③④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
<b>320 Ampere Commercial — Residential Single-Phase w/ Lever Bypass</b>											
1009444CH	320 A, 4 Terminal, LG Hub Cover Plate OH/UG ①③④	36.63	15.00	5.69	3/8-Inch Stud	3/8-Inch Stud	3.50	3.50	3.50	3.50	.50
<b>100 Ampere Multi-Position Sockets — Residential Single-Phase</b>											
Use 200 Ampere											
<b>200 Ampere Multi-Position Sockets — Residential Single-Phase ⑤</b>											
UHI2R2332TCVCH	200 A, 2 Position, LG Hub Open, OH, Ctr Fed ①②③	14.13	24.31	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UHI4R2352TCVCH	200 A, 4 Position, LG Hub Open, OH, Ctr Fed ①②③	14.13	40.63	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UHI6R2392TCVCH	200 A, 6 Position, LG Hub Open, OH, Ctr Fed ①②③	14.13	62.94	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UHI2R2332ACVCH	200 A, 2 Position, Solid Top, UG, Ctr Fed ①②③	14.13	24.31	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UHI4R2352ACVCH	200 A, 4 Position, Solid Top, UG, Ctr Fed ①②③	14.13	40.63	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UHI6R2392ACVCH	200 A, 5 Position, Solid Top, UG, Ctr Fed ①②③	14.13	62.94	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75

① Ground connection.

② Horn bypass.

③ Inhibitor provided on jaws.

④ Lever bypass.

⑤ For 3 and 5 gang units, use 4 or 6 gang respectively.

Note: "100...CH" catalog numbers are specialty sockets for individual utilities and do not follow typical catalog numbering system.

Table 15. Cutler-Hammer Meter Socket Accessories

Cutler-Hammer Catalog Number	Description	Cutler-Hammer Catalog Number	Description
ARP00003CH1	1.00-Inch Hub	ARP00008CH	Small Hub Closure Plate — Aluminum
ARP00004CH12	1.25-Inch Hub	ARP00016CHB	Large Hub Closure Plate
ARP00005CH15	1.50-Inch Hub	ARP00015CHAP	Hub Adapter Plate — Large to Small
ARP00006CH2	2.00-Inch Hub — Small Opening	ARP00035CHJ	Replacement — Plug-in Fifth Terminal (R and RS Models Only)
ARP00007CH25	2.50-Inch Hub — Small Opening	ARP00039CH	Replacement Block Assembly for 100 A Sockets — 2/0 Maximum
ARP00017CH2	2.00-Inch Hub — Large Opening	ARP00048CH	Replacement Block Assembly for 200 A Sockets — 350 Maximum
ARP00018CH25	2.50-Inch Hub — Large Opening	ARP00354CH	Replacement Block Assembly for 150 A Sockets — 250 Maximum
ARP00019CH3	3.00-Inch Hub — Large Opening	ARP00129CH	#4 – 600 kcmil Lug
ARP00021CH4	4.00-Inch Hub — Large Opening	ARP00427CH	#6 – 350 kcmil Dual Lug
ARP00002CHB	Small Hub Closure Plate	ARP00119CH	#6 – 350 kcmil Lug

## Product Selection by Utility

### Delaware Electric Co-Op



**100 Ampere Single-Position  
Meter Socket (UHTRS101BCH)**



**200 Ampere Single-Position  
Meter Socket (UHTRS213CCH)**



**320 Ampere Lever Bypass  
Meter Socket (UTH4330VCH)**



**200 Ampere Lever Bypass  
Meter Socket (UTH7213CCH)**

**Table 16. Delaware Electric Co-Op — Meter Socket Approval List**

Cutler-Hammer Catalog Number	Description	Dimensions			Connections		Concentric Knockouts (See Page 11)				
		H	W	D	Line	Load	1	2	3	4	5
<b>100 – 125 Ampere Single-Position — Residential Single-Phase</b>											
UHTRS101BCH	125 A, 4 Terminal, SM Hub Open, OH/UG ①②	10.88	8.00	3.50	#8 – 2/0	#8 – 2/0	1.50	1.50	2.00	1.25	—
UHTRS101LCH	125 A, 4 Terminal, 1.25-Inch Hub Installed, OH/UG ①②	10.88	8.00	3.50	#8 – 2/0	#8 – 2/0	1.50	1.50	2.00	1.25	—
<b>200 Ampere Single-Position — Residential Single-Phase</b>											
UHTRS202BCH	200 A, 4 Terminal, SM Hub Open, OH ①②	14.00	8.00	4.38	#8 – 250 kcmil	#8 – 250 kcmil	2.50	2.50	2.50	2.50	.50
UHTRS213CCH	200 A, 4 Terminal, SM Hub Cover Plate, OH/UG ①②	15.00	11.00	4.38	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	2.50	2.50	.50
<b>200 Ampere Single-Position — Commercial w/ Lever Bypass</b>											
UTH7213C or UCH	200 A, 7 Terminal, Hub Closure Plate, OH/UG ①③	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
<b>320 Ampere Commercial — Residential Single-Phase w/ Lever Bypass</b>											
UTH4300UCH	320 A, 4 Terminal, LG Hub Cover Plate, OH ①③	34.50	13.00	4.94	3/8-Inch Stud	3/8-Inch Stud	3.00	3.00	3.00	3.00	.50
UTH4330UCH	320 A, 4 Terminal, LG Hub Cover Plate, OH/UG ①③	36.63	15.00	5.69	3/8-Inch Stud	3/8-Inch Stud	3.50	3.50	3.50	3.50	.50
UTH7300UCH	320 A, 7 Terminal, LG Hub Cover Plate, OH ①③	34.50	15.00	5.69	3/8-Inch Stud	3/8-Inch Stud	3.50	3.50	3.50	3.50	.50
UTH7330UCH	320 A, 7 Terminal, LG Hub Cover Plate, OH/UG ①③	39.88	20.00	6.50	3/8-Inch Stud	3/8-Inch Stud	4.00	4.00	4.00	4.00	.50

① Ground connection.

② Horn bypass.

③ Lever bypass.


**Table 17. Cutler-Hammer Meter Socket Accessories**

Cutler-Hammer Catalog Number	Description	Cutler-Hammer Catalog Number	Description
ARP00003CH1	1.00-Inch Hub	ARP00008CH	Small Hub Closure Plate — Aluminum
ARP00004CH12	1.25-Inch Hub	ARP00016CHB	Large Hub Closure Plate
ARP00005CH15	1.50-Inch Hub	ARP00015CHAP	Hub Adapter Plate — Large to Small
ARP00006CH2	2.00-Inch Hub — Small Opening	ARP00035CHJ	Replacement — Plug-in Fifth Terminal (R and RS Models Only)
ARP00007CH25	2.50-Inch Hub — Small Opening	ARP00039CH	Replacement Block Assembly for 100 A Sockets — 2/0 Maximum
ARP00017CH2	2.00-Inch Hub — Large Opening	ARP00048CH	Replacement Block Assembly for 200 A Sockets — 350 Maximum
ARP00018CH25	2.50-Inch Hub — Large Opening	ARP00354CH	Replacement Block Assembly for 150 A Sockets — 250 Maximum
ARP00019CH3	3.00-Inch Hub — Large Opening	ARP00129CH	#4 – 600 kcmil Lug
ARP00021CH4	4.00-Inch Hub — Large Opening	ARP00427CH	#6 – 350 kcmil Dual Lug
ARP00002CHB	Small Hub Closure Plate	ARP00119CH	#6 – 350 kcmil Lug

May 2007

Technical Data

**Knockout Drawings**

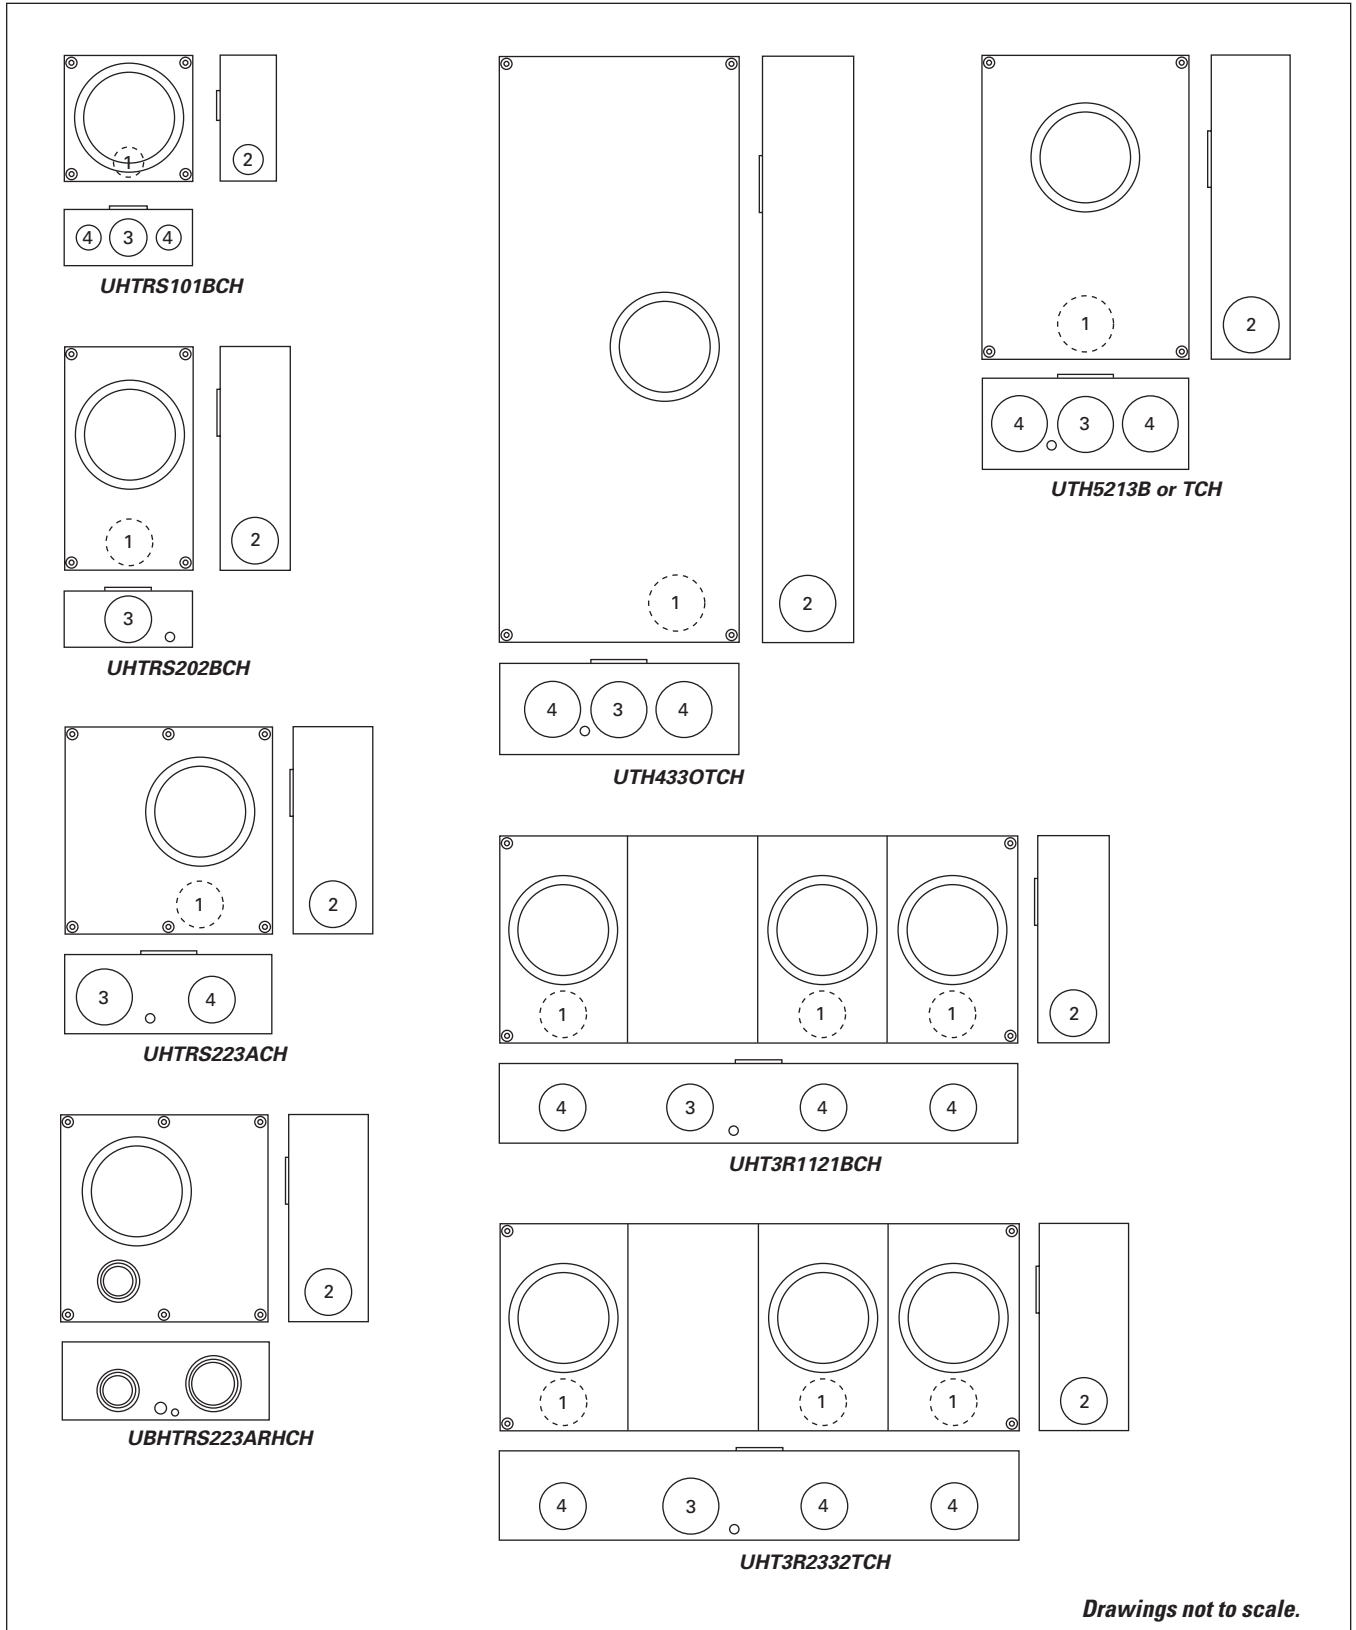

*Drawings not to scale.*

**Figure 1. Knockout Drawings**

Meter Packs

Product Description




Meter Pack

- Cutler-Hammer 1MP units by Eaton Electrical are self-contained (main terminal box included) for installations requiring up to six meter socket positions in a single enclosure.
- Units are not gangable with any other metering device.
- Approved by major power companies, UL listed, suitable as service equipment and meets the service and electrical requirements of EUSERC and CECHA.
- Series rating up to 100 kAIC.
- All ringless cover devices include fifth jaw as standard.
- Ring type devices do not include fifth jaw as standard. Order **1MM5JK** if needed.
- Bondable neutral.
- 120/240 Vac, single-phase, 3-wire metering device.
- Up to 600 amperes maximum horizontal bus rating.
- Incoming lugs not included (phase A, phase B, and neutral).
- Indoor/outdoor construction.
- Provision for 2-pole breaker (plug-on type for 125 ampere sockets and bolt-on type for 200 ampere sockets) — circuit breakers not included.
- Underground incoming feed.
- Aluminum or copper bus.

Product Selection

Table 18. Meter Pack Catalog Numbering System

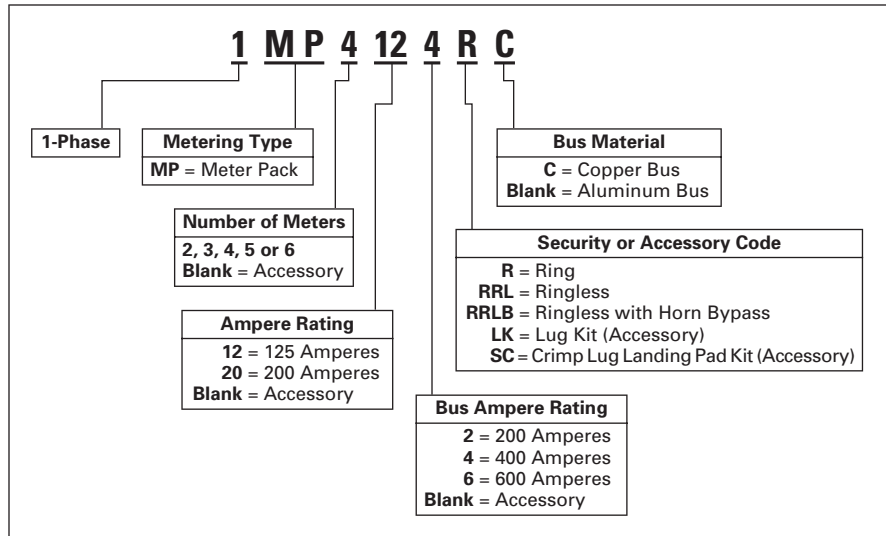

When Ordering:

1. Determine catalog number of the basic device.
2. Include Lug Kit for incoming section. See **Table 22**.
3. Find quantity and catalog numbers for tenant circuit breakers. (Order one breaker per socket.) See **Page 14**.
4. Select required accessories. See **Page 17**.

Table 19. Meter Packs — Aluminum Bus

Socket Ampere Rating	Number of Meter Sockets	Bus Ampere Rating	Main Tenant Breaker Type ①	Catalog Number	Semi-flush Flange Kit Catalog Number
<b>Ringless Style Meter Socket Covers ②</b>					
125	2	200	Plug-on Type	<b>1MP2122RRL</b> ③④	<b>1MPSFK1</b>
	2	200	Plug-on Type	<b>1MP2122RRRLC</b>	<b>1MPSFK1</b>
	3	400	BR_	<b>1MP3124RRL</b>	<b>1MPSFK2</b>
	4	400	BRH_	<b>1MP4124RRL</b>	<b>1MPSFK2</b>
	5	600	BRHH_	<b>1MP5126RRL</b>	<b>1MPSFK3</b>
	6	600	—	<b>1MP6126RRL</b>	<b>1MPSFK3</b>
200	2	400	Bolt-on Type	<b>1MP2204RRL</b>	<b>1MPSFK4</b>
	3	600	CC2_X	<b>1MP3206RRL</b>	<b>1MPSFK5</b>
	4	600	CHH2_H2X	<b>1MP4206RRL</b>	<b>1MPSFK5</b>
	5	600	CHH2_H4X	<b>1MP5206RRL</b>	<b>1MPSFK6</b>
	5	600	CHH_X	<b>1MP6206RRL</b>	<b>1MPSFK6</b>
	6	600	CHH_X	<b>1MP6206RRL</b>	<b>1MPSFK6</b>
<b>Ringless Style Covers with Horn Bypass ②</b>					
125	2	200	Plug-on Type	<b>1MP2122RRRLB</b> ③④⑤	<b>1MPSFK1</b>
	2	200	Plug-on Type	<b>1MP2122RRRLBC</b> ⑤	<b>1MPSFK1</b>
	3	400	BR_	<b>1MP3124RRRLB</b> ⑤	<b>1MPSFK2</b>
	4	400	BRH_	<b>1MP4124RRRLB</b> ⑤	<b>1MPSFK2</b>
	5	600	BRHH_	<b>1MP5126RRRLB</b> ⑤	<b>1MPSFK3</b>
	6	600	—	<b>1MP6126RRRLB</b> ⑤	<b>1MPSFK3</b>
200	2	400	Bolt-on Type	<b>1MP2204RRRLB</b> ⑤	<b>1MPSFK4</b>
	3	600	CC2_X	<b>1MP3206RRRLB</b> ⑤	<b>1MPSFK5</b>
	4	600	CHH2_H2X	<b>1MP4206RRRLB</b>	<b>1MPSFK5</b>
	5	600	CHH2_H4X	<b>1MP5206RRRLB</b> ⑤	<b>1MPSFK6</b>
	5	600	CHH_X	<b>1MP6206RRRLB</b> ⑤	<b>1MPSFK6</b>
	6	600	CHH_X	<b>1MP6206RRRLB</b> ⑤	<b>1MPSFK6</b>

① See **Table 24**.  
 ② Fifth jaw factory installed at 9 o'clock position.  
 ③ Main lugs included. #6 – 300 kcmil. (Optional lugs are not available.)  
 ④ Bottom feed only.  
 ⑤ CECHA approved.  
**Note:** See **Table 22** for Main Lug Kit Selection. See **Table 23** for Wire Sizes.

**Table 20. Meter Packs — Copper Bus**

Socket Ampere Rating	Number of Meter Sockets	Bus Ampere Rating	Main Tenant Breaker Type <sup>①</sup>	Catalog Number	Semi-flush Flange Kit Catalog Number
<b>Ringless Style Meter Socket Covers <sup>②</sup></b>					
125	3	400	Plug-on Type	1MP3124RRLC	1MP5FK2
	4	400	BR_	1MP4124RRLC	1MP5FK2
	5	600	BRH_	1MP5126RRLC	1MP5FK3
	6	600	BRHH_	1MP6126RRLC	1MP5FK3
200	2	400	Bolt-on Type	1MP2204RRLC	1MP5FK4
	3	600	CC2_X	1MP3206RRLC	1MP5FK5
	4	600	CHH2_H2X	1MP4206RRLC	1MP5FK5
	5	600	CHH2_H4X	1MP5206RRLC	1MP5FK6
6	600	CHH_X	1MP6206RRLC	1MP5FK6	

**Ringless Style Covers with Horn Bypass <sup>②③</sup>**

Socket Ampere Rating	Number of Meter Sockets	Bus Ampere Rating	Main Tenant Breaker Type <sup>①</sup>	Catalog Number	Semi-flush Flange Kit Catalog Number
125	3	400	Plug-on Type	1MP3124RRLBC	1MP5FK2
	4	400	BR_	1MP4124RRLBC	1MP5FK2
	5	600	BRH_	1MP5126RRLBC	1MP5FK3
	6	600	BRHH_	1MP6126RRLBC	1MP5FK3
200	2	400	Bolt-on Type	1MP2204RRLBC	1MP5FK4
	3	600	CC2_X	1MP3206RRLBC	1MP5FK5
	4	600	CHH2_H2X	1MP4206RRLBC	1MP5FK5
	5	600	CHH2_H4X	1MP5206RRLBC	1MP5FK6
6	600	CHH_X	1MP6206RRLBC	1MP5FK6	

① See Table 24.

② Fifth jaw factory installed at 9 o'clock position.

③ CECHA approved.

**Table 21. CECHA Approved Meter Socket Accessories**

Description	Catalog Number
<b>Pedestal Trough Raceway for Underground Services <sup>④</sup></b>	
36.00-Inch Pedestal Trough Raceway (36.00" H 9.00" W 4.25" D)	1008934CH
<b>Adapter Plates</b>	
Adapter Plate for 2 – 4 Gang	1MP34EW125
Adapter Plate for 5 – 6 Gang	1MP56EW125

④ Bottom raceway adapter plates required.

**Table 22. Main Lug Kit Selection — Field Installed Kits for Either 400 or 600 Ampere Main Bus**

Line Lug and Wire Sizes Order Separately and Field Install	Line Lug Kit Catalog Number Order Three Kits (For Two Lines and Neutral)
(1) #6 – 600 kcmil or (2) 2/0 – 250 kcmil (2) 250 – 500 kcmil (3) #4 – 300 kcmil (1) 750 kcmil Crimp lug landing pad 250 – 750 kcmil	1MPLK1 1MPLK3 1MPLK4 1MPLK2 <sup>⑤</sup> 1MPSC1 <sup>⑥</sup>

⑤ This lug is not UL listed.

⑥ This kit comes with three pads for two lines and neutral. Each pad will accept one or two crimp lugs. Cannot be used on 1MP2122R, RL and RLB EUSERC underground termination.

**Table 23. Wire Sizes — Neutral and Ground Lugs**

Description	Wire Size, Al/Cu	Catalog Number
Neutral: 125 ampere meter pack 200 ampere meter pack	#6 – 2/0 #1/0 – 300 kcmil	— —
Equipment Ground Bar: 125 ampere meter pack 200 ampere meter pack	#14 – #2 #14 – 2/0	— —
Optional Ground Bar	#6 – 2/0	1MMGBK

**Note:** Each stack includes a neutral and ground bar. If an extra ground bar is needed, order 1MMGBK.



## Main Tenant Circuit Breakers

### Product Description

#### 1MP, 1MM and 3MM Main Tenant Circuit Breakers

The following Cutler-Hammer breakers are to be used on 1MP, 1MM and 3MM modular metering stacks. They are 120/240 Vac — field installed.



BR2100



CC2200

### Product Selection

Table 24. 1MP, 1MM and 3MM Main Tenant Circuit Breakers

Description	Number of Poles	Main Tenant Circuit Breaker Ampere Rating	Catalog Number				
			10,000 AIC	22,000 AIC	25,000 AIC	42,000 AIC	100,000 AIC
Plug-on type circuit breakers used with 1MP, 1MM and 3MM 125 ampere modular metering stacks	2	60	BR260	BRH260	—	BRHH260	—
	2	70	BR270	BRH270	—	BRHH270	—
	2	80	BR280	BRH280	—	BRHH280	—
	2	90	BR290	BRH290	—	BRHH290	—
	2	100	BR2100	BRH2100	—	BRHH2100	—
	2	110	BR2110	BRH2110	—	BRHH2110	—
Bolt-on type circuit breakers used with 1MP, 1MM and 3MM 200 ampere modular metering stacks	2	125	BR2125	BRH2125	—	BRHH2125	—
	2	60	—	—	CHH2060H2X	CHH2060H4X	CHH2060X
	2	70	—	—	CHH2070H2X	CHH2070H4X	CHH2070X
	2	80	—	—	CHH2080H2X	CHH2080H4X	CHH2080X
	2	90	—	—	CHH2090H2X	CHH2090H4X	CHH2090X
	2	100	CC2100X	—	CHH2100H2X	CHH2100H4X	CHH2100X
	2	125	CC2125X	—	CHH2125H2X	CHH2125H4X	CHH2125X
	2	150	CC2150X	—	CHH2150H2X	CHH2150H4X	CHH2150X
	2	175	CC2175X	—	CHH2175H2X	CHH2175H4X	CHH2175X
	2	200	CC2200X	—	CHH2200H2X	CHH2200H4X	CHH2200X

Dimensions and Knockouts (in Inches) — 1MP Meter Packs — Aluminum and Copper Bus

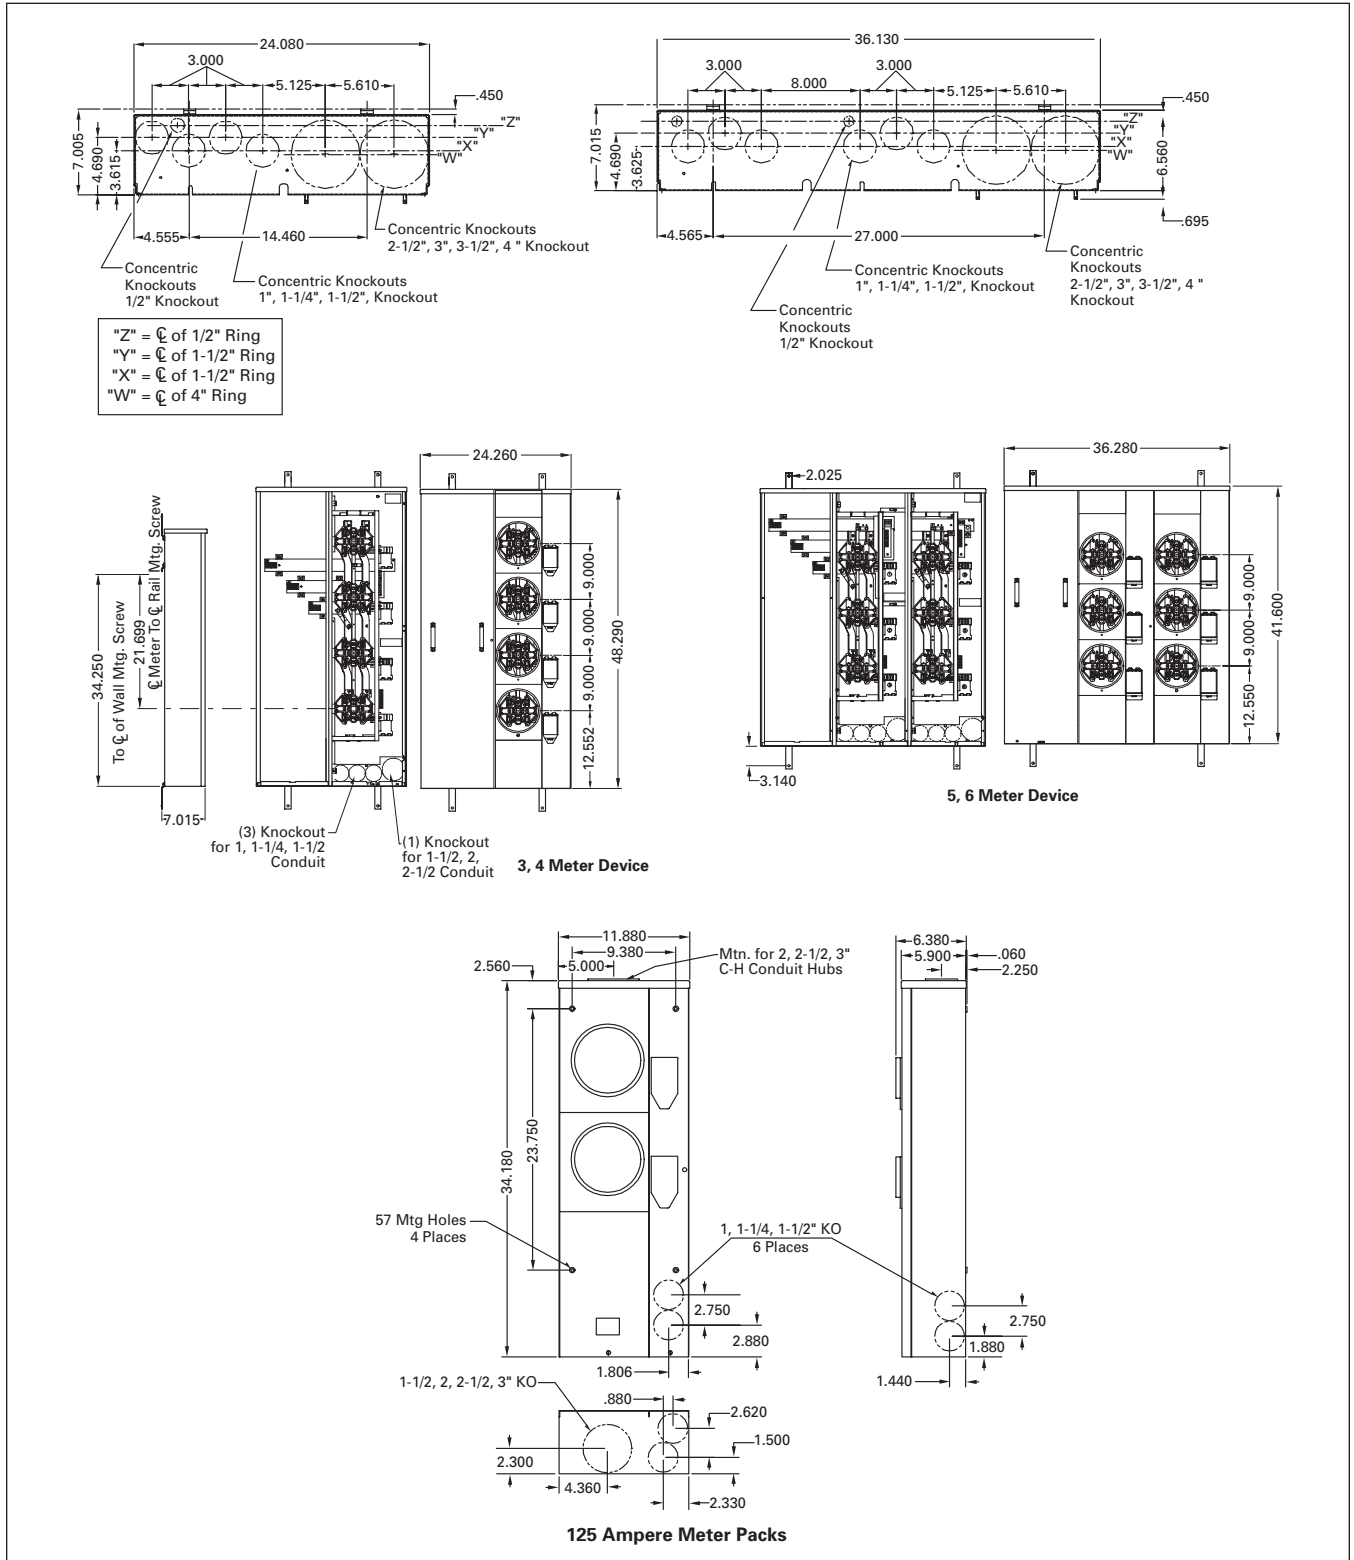


Figure 2. 125 Ampere Maximum Tenant Breaker

Meter Packs

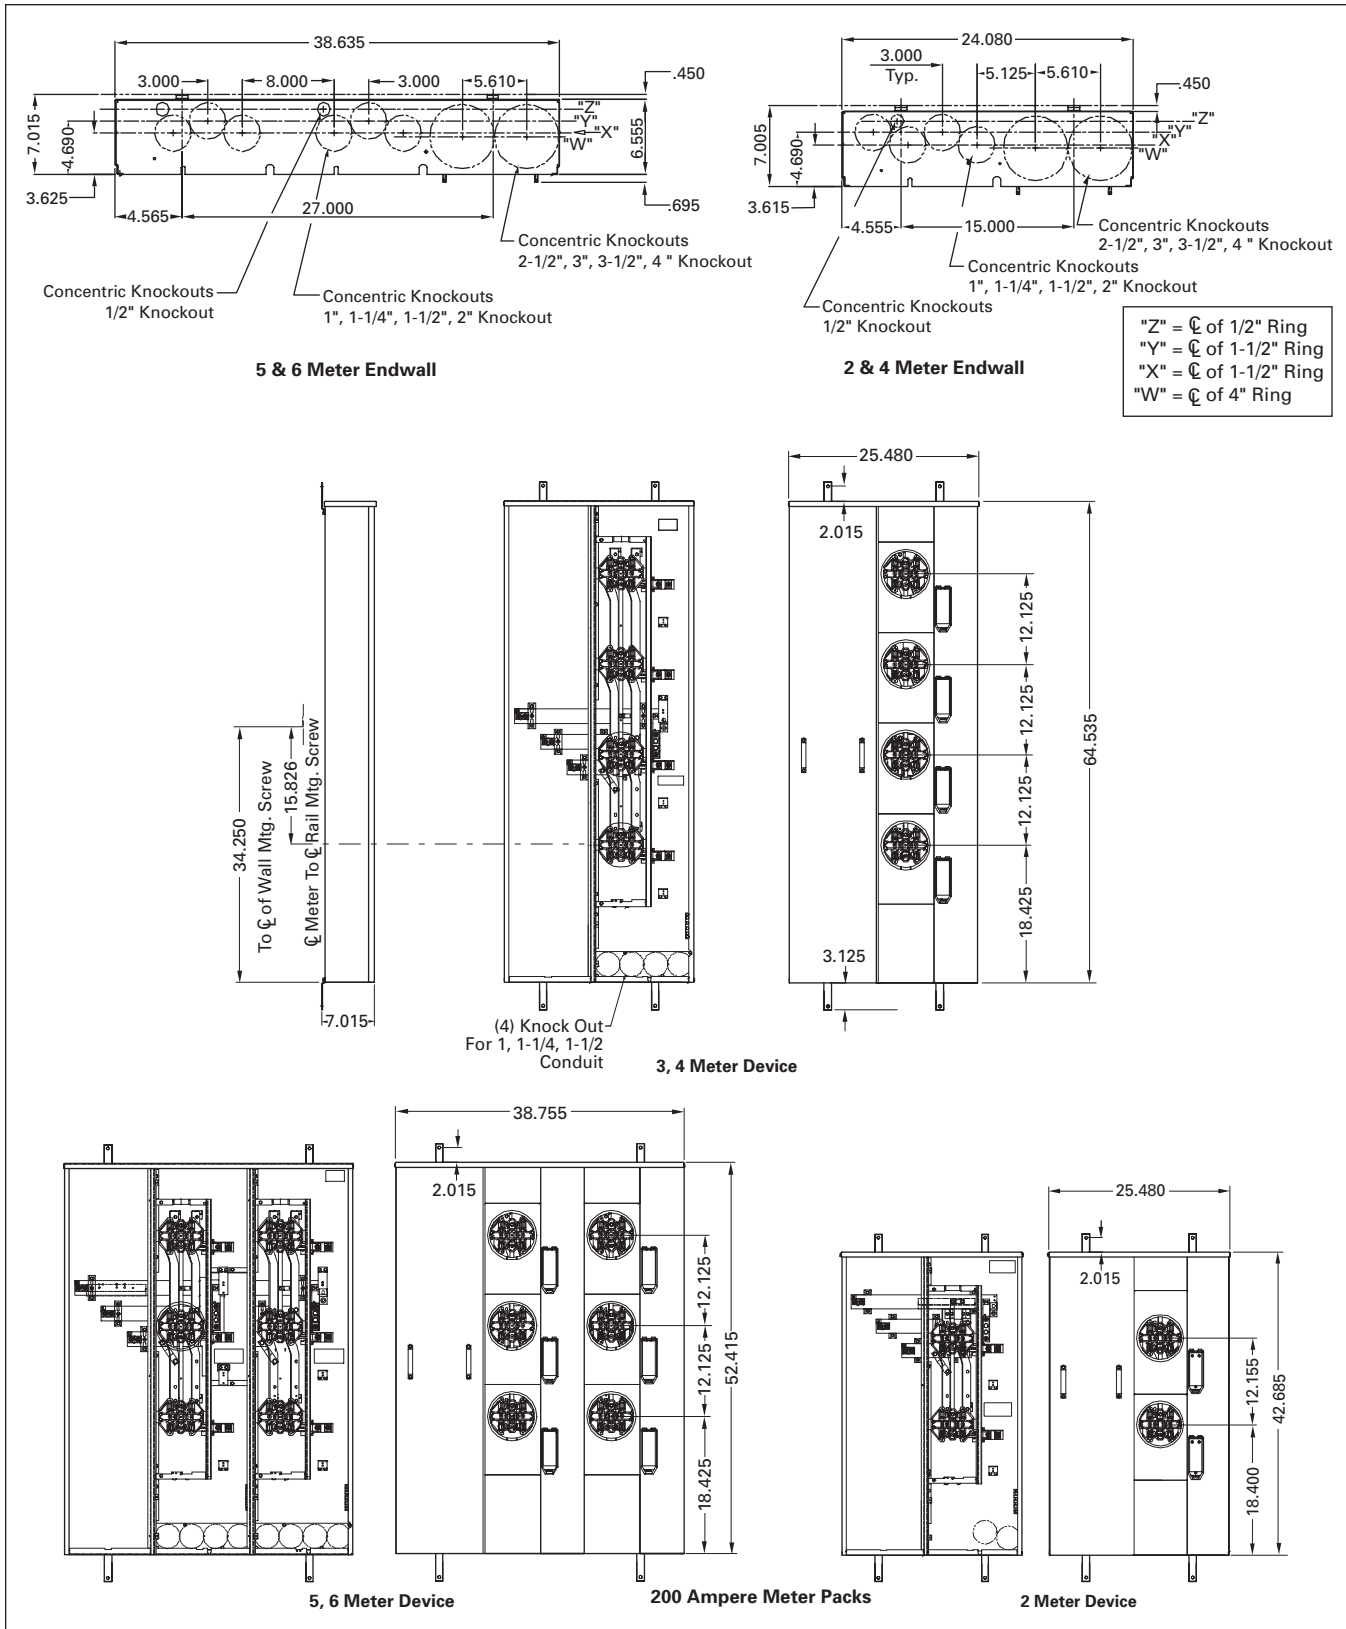


Figure 3. 200 Ampere Maximum Tenant Breaker

**Meter Packs**

**Table 25. Accessories for 1MP, 1MM and 3MM Modular Metering Stacks**

Description	Application	Catalog Number
Fifth Jaw Kit	Bolted onto neutral in the 3, 6 or 9 o'clock position. Typically used on network metering systems (3-phase in/single-phase out) or when specified by utility company.	1MM5JK
Isolated Fifth Jaw Kit	Connects to the neutral with an insulated wire.	1MM5JKOP
Horn Bypass	Used only on ringless cover stacks, kits can be installed on 125 ampere or 200 ampere sockets. <b>Note:</b> For 1MP2122RRL use:	1MMBPH WCG8HB
Meter Bypass Jumper	Installed on 125 ampere or 200 ampere sockets. Jumpers are plugged into jaws. Order Lexan® cover plate with bypass jumpers to prevent access to meter socket once energized. (Not UL listed.)	1MMBPJ
Lexan Blank Cover	Circular cover mounted on ring or ringless devices preventing access to meter socket while meter is not in place. Includes 4 plastic tabs which plug into each jaw.	1MMPCP
	Same as 1MMPCP minus the tabs located in the back to plug into jaws. This device to be used while meter bypass jumpers are in place (1MMBPJ).	1MMACP
Blank Meter Socket Cover	Used for 125 ampere stacks. Fits bottom socket only. Kit replaces existing meter cover preventing access to meter socket. Includes hasp for seal.	1MMBC125B
	Used on 200 ampere stacks. Fits bottom socket only. Kit replaces existing meter cover preventing access to meter socket. Includes hasp for seal.	1MMBC200B
Wall Mounting Rail	Rails are 4 feet (1.2 m) in length. Bolted on wall for stacks, packs, and mains to be hung.	1MMWB
Bussed Spacer	Bussed spacer 1200 ampere 4-inch (101.6 mm). Required when stacks are mounted on right-hand side in EUSERC areas. (Copper)	3MMBSK
Bus Duct Riser/ Meter Center Connection	Available in 400, 600, 800 ampere Main Fusible units only. Contact Product Line for details.	—



*Fifth Jaw Kit*



*Horn Bypass Kit*



*Lexan Blank Cover*



*Wall Mounting Rail*



*Bussed Spacer*

INNER-TITE is a registered trademark of Inner-Tite Corp. Lexan is a registered trademark of General Electric Co., USA. UL is a registered trademark of Underwriters Laboratories Inc.

---

*This page intentionally left blank.*



May 2007

---

*This page intentionally left blank.*

Eaton Corporation  
Electrical Group  
1000 Cherrington Parkway  
Moon Township, PA 15108  
United States  
877-ETN CARE (877-386-2273)  
Eaton.com

# Metering Equipment

## Contents


<i>Description</i>	<i>Page</i>
<b>Meter Socket Catalog Number Logic</b>	
Catalog Numbering System . . . . .	2
<b>Product Selection by Utility</b>	
Allegheny Power Utility . . . . .	4
Duquesne Light Company Utility . . . . .	5
First Energy (GPU, JCP&L, Penelec & Met Ed) . . . . .	6
Pennsylvania Power & Light (PP&L) . . . . .	7
Philadelphia Electric Company (PECO) . . . . .	8
Atlantic City Electric/Delmarva Utility . . . . .	9
Delaware Electric Co-Op . . . . .	10
<b>Technical Data</b>	
Knockout Drawings . . . . .	11
<b>Meter Packs</b>	
Product Description . . . . .	12
Product Selection . . . . .	12
<b>Main Tenant Circuit Breakers</b>	
Product Description . . . . .	14
Product Selection . . . . .	14
Dimensions and Knockouts . . . . .	15
<b>Accessories</b>	
Meter Packs . . . . .	17



**Group Metering**

## Catalog Numbering System

Table 1. "RS" Group Catalog Numbering System

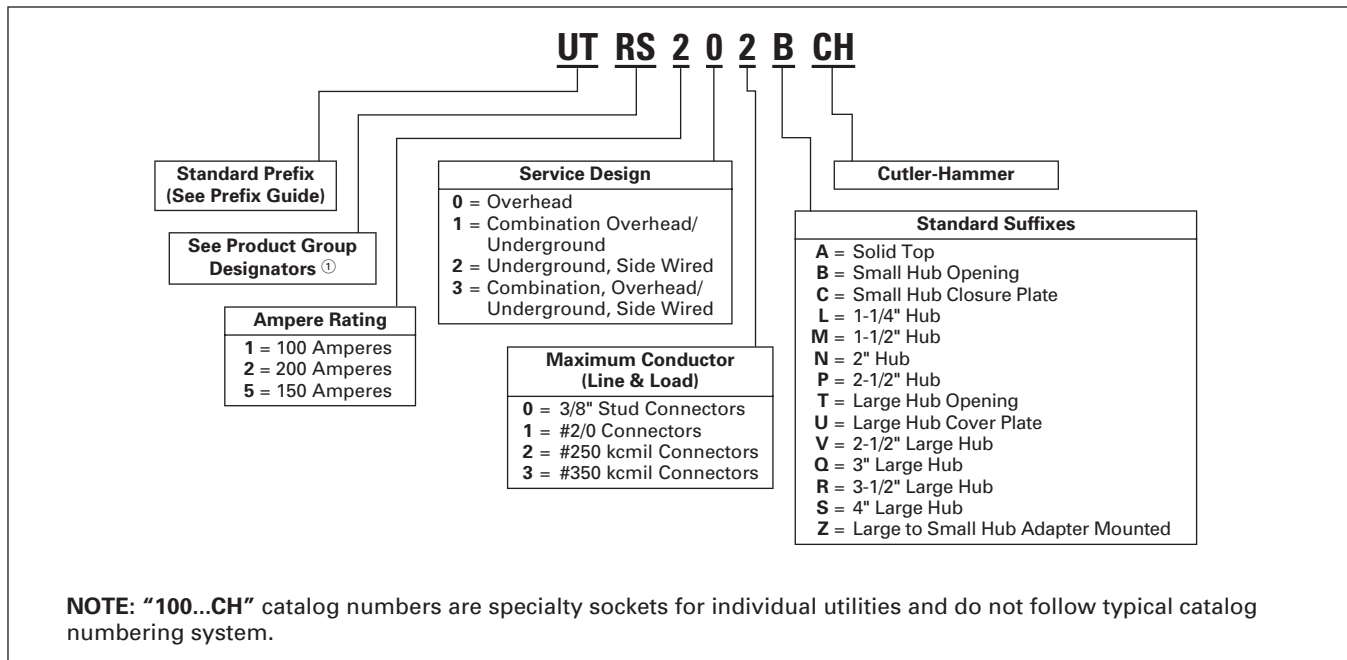

① "RS" Group = Residential Service, Single Position.


**Note:** Some sockets that are built for specific utilities have their own unique catalog numbers. These can be found on the utility selection pages.

## Meter Socket "Prefix" Guide

<b>A</b>	Aluminum enclosure
<b>B</b>	Barrel lock provision, for an exposed INNER-TITE® or Brooks barrel lock; unit includes an internal lock receiver bracket.
<b>F</b>	Barrel lock with guard provision, for a lock guard INNER-TITE or Brooks barrel lock; unit includes an internal lock receiver bracket.
<b>G</b>	Grounded fifth terminal (9 o'clock position)
<b>H</b>	Horn bypass
<b>I</b>	Inhibitor installed in wire connectors
<b>M</b>	Temporary meter cover (waxed cardboard)
<b>N</b>	No sealing ring (applies only to ring style sockets)
<b>R</b>	Ring style socket
<b>S</b>	Aluminum screw type sealing ring (applies only to ring style sockets)
<b>T</b>	Grounding connector (#14 – #2 Cu) for Tri-Plex ground
<b>TT</b>	Two (2) grounding connectors (#14 – #2 Cu) for Quad-Plex ground
<b>U</b>	UL® (Underwriters Laboratories) labeled
<b>Z</b>	5/16" Hex head connector screw in place of slotted (100 amperes only)


**Note:** The "U" prefix is always used first followed by other prefixes required in alphabetical order.

Table 2. "2R-6R" and "2H-6H" Group Catalog Numbering System

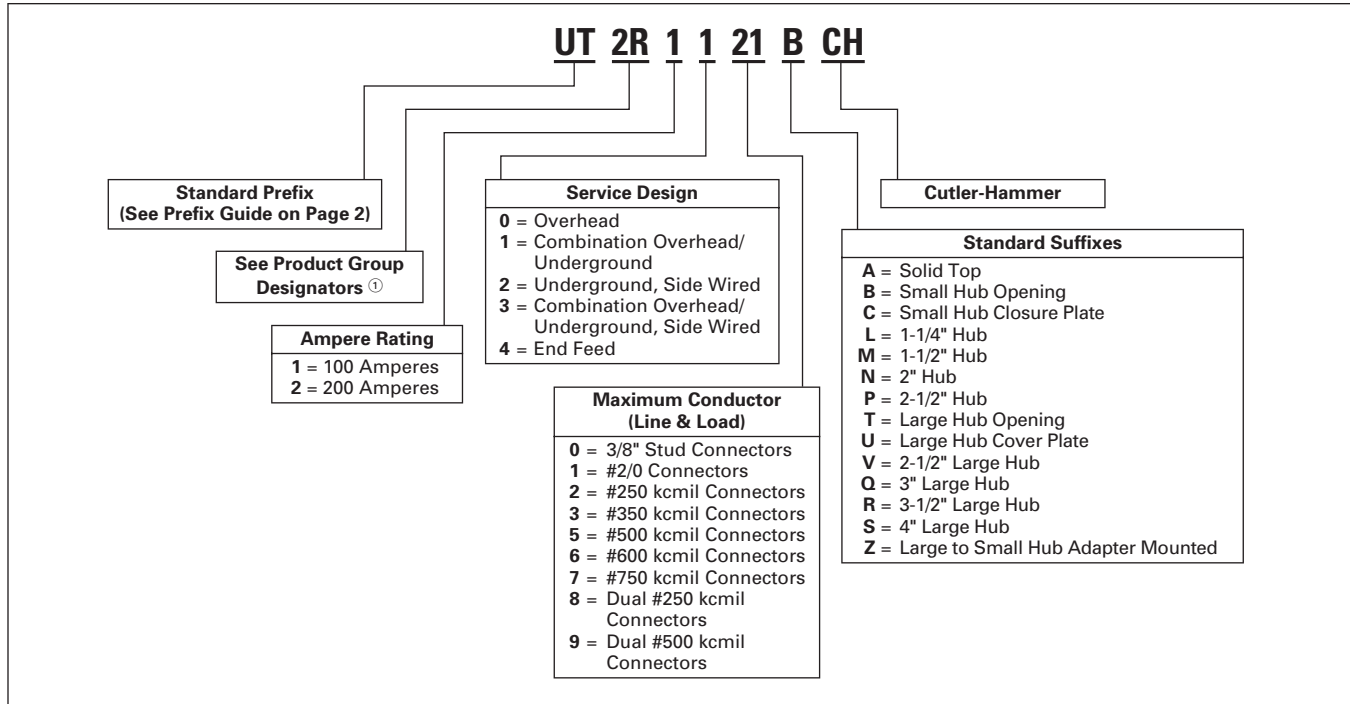

① "2R-6R" Group = Residential Service, Multiple Position.  
"2H-6H" Group = Commercial or Residential Service, Multiple Position.

Table 3. "H" Group Catalog Numbering System

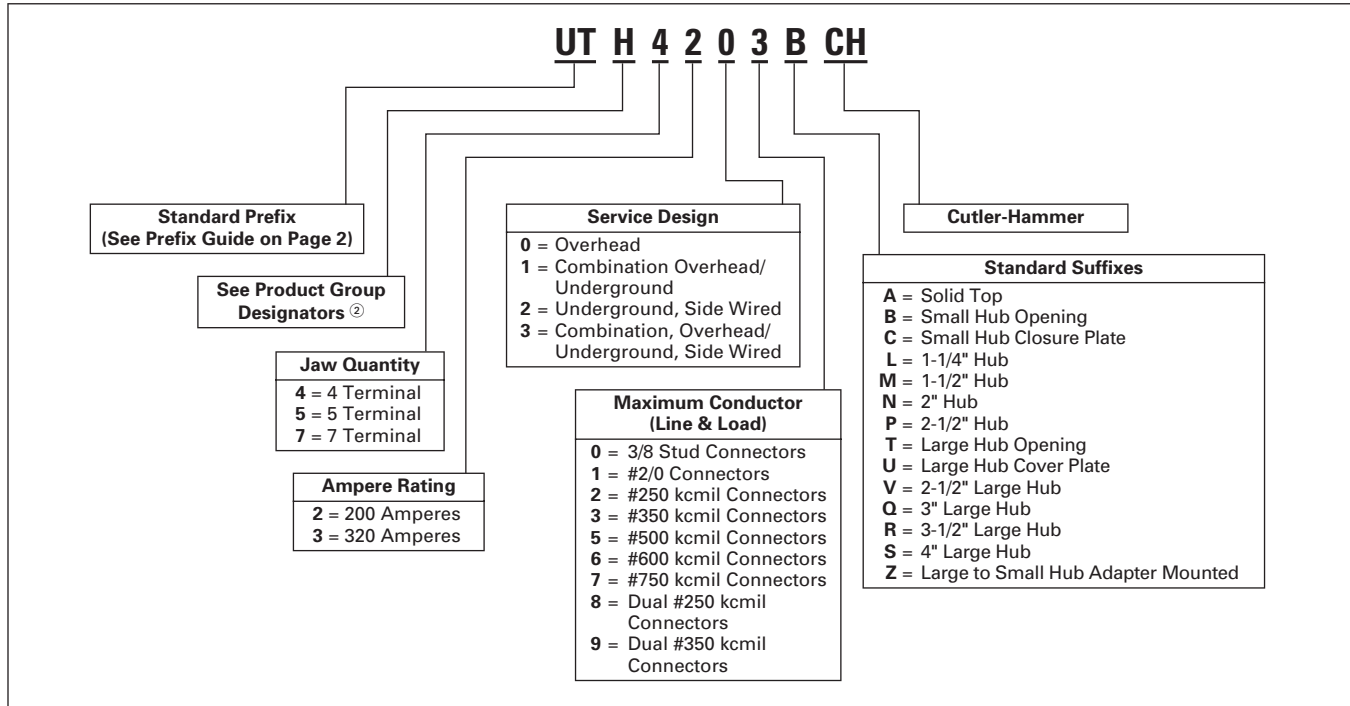


② "H" Group = Commercial or Residential Service, Single Position (lever bypass).

**Note:** "100...CH" catalog numbers are specialty sockets for individual utilities and do not follow typical catalog numbering system.



## Product Selection by Utility

### Allegheny Power Utility

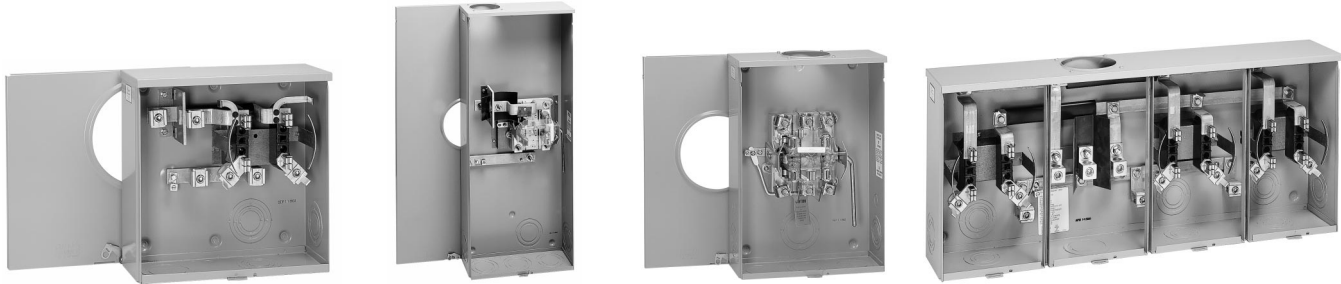

200 Ampere Single-Position  
Meter Socket (1008941CH)

320 Ampere Lever Bypass  
Meter Socket (UTH4330TCH)

200 Ampere Lever Bypass  
Meter Socket (UTH7213TCH)

200 Ampere Multi-Position  
Meter Socket (UHT3R2332TCH)

Table 4. Allegheny Power Utility — Meter Socket Approval List

Cutler-Hammer Catalog Number	Description	Dimensions			Connections		Concentric Knockouts (See Page 11)				
		H	W	D	Line	Load	1	2	3	4	5
<b>100 Ampere Single-Position — Residential</b>											
UHTRS101BCH	100 A, 4 Terminal, SM Hub Open, OH/UG ①②	10.88	8.00	3.50	#8 – 2/0	#8 – 2/0	1.50	1.50	2.00	1.25	—
<b>200 Ampere Single-Position — Residential</b>											
1008941CH	200 A, 4 Terminal, Solid Top, UG, Offset, Left Feed ①②	17.13	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	3.00	.50
1008940CH	200 A, 4 Terminal, Solid Top, UG, Offset, Right Feed ①②	17.13	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	3.00	.50
UHTRS213BCH	200 A, 4 Terminal, SM Hub Open, OH ①②	15.00	11.00	4.38	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	2.50	2.50	.50
<b>200 Ampere Single-Position — Commercial w/ Lever Bypass</b>											
UTH7213B or TCH	200 A, 7 Terminal, SM or LG Hub Open, OH/UG ①③	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
<b>320 Ampere Commercial — Residential w/ Lever Bypass</b>											
UTH4330TCH	320 A, 4 Terminal, LG Hub Open, OH/UG ①③	36.63	15.00	5.69	3/8" Stud	3/8" Stud	3.50	3.50	3.50	3.50	.50
UTH7330TCH	320 A, 7 Terminal, LG Hub Open, OH/UG ①③	39.88	20.00	6.50	3/8" Stud	3/8" Stud	4.00	4.00	4.00	4.00	.50
<b>100 Ampere Multi-Position — Residential Single-Phase</b>											
UHT2R1121BCH	100 A, 2 Position, SM Hub Open, OH, Center Feed ①②	14.13	24.31	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UHT3R1121BCH	100 A, 3 Position, SM Hub Open, OH, Center Feed ①②	14.13	32.47	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UHT4R1121BCH	100 A, 4 Position, SM Hub Open, OH, Center Feed ①②	14.13	40.63	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UHT5R1121BCH	100 A, 5 Position, SM Hub Open, OH, Center Feed ①②	14.13	48.78	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UHT6R1131BCH	100 A, 6 Position, SM Hub Open, OH, Center Feed ①②	14.13	56.94	4.50	#6 – 350 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UHT2R1421BCH	100 A, 2 Position, SM Hub Open, OH, End Feed ①②	14.13	20.16	5.38	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	3.00	2.50	.50
UHT3R1421BCH	100 A, 3 Position, SM Hub Open, OH, End Feed ①②	14.13	28.31	5.38	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	3.00	2.50	.50
UHT4R1421BCH	100 A, 4 Position, SM Hub Open, OH, End Feed ①②	14.13	36.47	5.38	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	3.00	2.50	.50
UHT5R1421BCH	100 A, 5 Position, SM Hub Open, OH, End Feed ①②	14.13	44.63	5.38	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	3.00	2.50	.50
UHT6R1431BCH	100 A, 6 Position, SM Hub Open, OH, End Feed ①②	14.13	52.78	5.38	#6 – 350 kcmil	#8 – 2/0	2.50	2.50	3.00	2.50	.50
<b>200 Ampere Multi-Position — Residential Single-Phase</b>											
UHT2R2332TCH	200 A, 2 Position, LG Hub Open, OH, Center Feed ①②	14.13	24.31	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UHT3R2332TCH	200 A, 3 Position, LG Hub Open, OH, Center Feed ①②	14.13	32.47	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UHT4R2352TCH	200 A, 4 Position, LG Hub Open, OH, Center Feed ①②	14.13	40.63	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UHT5R2392TTCH	200 A, 5 Position, LG Hub Open, OH, Center Feed ①②	14.13	54.78	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UHT6R2392TTCH	200 A, 6 Position, LG Hub Open, OH, Center Feed ①②	14.13	62.94	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75

① Ground connection.

② Horn bypass.

③ Lever bypass.

Note: "100...CH" catalog numbers are specialty sockets for individual utilities and do not follow typical catalog numbering system.

Table 5. Cutler-Hammer Meter Socket Accessories

Cutler-Hammer Catalog Number	Description	Cutler-Hammer Catalog Number	Description
ARP00003CH1	1.00-Inch Hub	ARP00008CH	Small Hub Closure Plate — Aluminum
ARP00004CH12	1.25-Inch Hub	ARP00016CHB	Large Hub Closure Plate
ARP00005CH15	1.50-Inch Hub	ARP00015CHAP	Hub Adapter Plate — Large to Small
ARP00006CH2	2.00-Inch Hub — Small Opening	ARP00035CHJ	Replacement — Plug-in Fifth Terminal (R and RS Models Only)
ARP00007CH25	2.50-Inch Hub — Small Opening	ARP00039CH	Replacement Block Assembly for 100 A Sockets — 2/0 Maximum
ARP00017CH2	2.00-Inch Hub — Large Opening	ARP00048CH	Replacement Block Assembly for 200 A Sockets — 350 Maximum
ARP00018CH25	2.50-Inch Hub — Large Opening	ARP00354CH	Replacement Block Assembly for 150 A Sockets — 250 Maximum
ARP00019CH3	3.00-Inch Hub — Large Opening	ARP00129CH	#4 – 600 kcmil Lug
ARP00021CH4	4.00-Inch Hub — Large Opening	ARP00427CH	#6 – 350 kcmil Dual Lug
ARP00002CHB	Small Hub Closure Plate	ARP00119CH	#6 – 350 kcmil Lug

Duquesne Light Company Utility



100 Ampere Single-Position Meter Socket (URS101BDQCH)



200 Ampere Single-Position Meter Socket (1008827CH)



200 Ampere Multi-Position Meter Socket (U3R2332TDQCH)

Table 6. Duquesne Light Company Utility — Meter Socket Approval List

Cutler-Hammer Catalog Number	Description	Dimensions			Connections		Concentric Knockouts (See Page 11)				
		H	W	D	Line	Load	1	2	3	4	5
<b>100 – 125 Ampere Single-Position — Residential Single-Phase</b>											
URS101BDQCH	125 A, 4 Terminal, SM Hub Open, OH ①	10.88	8.00	3.50	#8 – 2/0	#8 – 2/0	1.50	1.50	2.00	1.25	—
<b>200 Ampere Single-Position — Residential Single-Phase</b>											
URS202BDQCH	200 A, 4 Terminal, SM Hub Open, OH ①	14.00	8.00	4.38	#8 – 250 kcmil	#8 – 250 kcmil	2.50	2.50	2.50	—	.50
1008717CH	200 A, 4 Terminal, Solid Top, UG ①	15.00	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	3.00	3.00	3.00	3.00	.50
1008819CH	200 A, 4 Terminal, Solid Top, UG, Offset Right Feed ①	13.00	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	3.00	.50
1008827CH	200 A, 4 Terminal, Solid Top, UG, Offset Left Feed ①	13.00	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	3.00	.50
<b>150 Ampere Multi-Position — Residential Single-Phase</b>											
U2R5432BDQCH	150 A, 2 Position, SM Hub Open, OH/UG, End Feed ①	14.13	20.16	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
U3R5432BDQCH	150 A, 3 Position, SM Hub Open, OH/UG, End Feed ①	14.13	20.16	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
<b>200 Ampere Multi-Position — Residential Single-Phase</b>											
U2R2332TDQCH	200 A, 2 Position, LG Hub Open, OH, Center Feed ①	14.13	24.31	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
U3R2332TDQCH	200 A, 3 Position, LG Hub Open, OH, Center Feed ①	14.13	32.47	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
U4R2352TDQCH	200 A, 4 Position, LG Hub Open, OH, Center Feed ①	14.13	40.63	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
U5R2392TTDQCH	200 A, 5 Position, LG Hub Open, OH, Center Feed ①	14.13	54.78	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
U6R2392TTDQCH	200 A, 6 Position, LG Hub Open, OH, Center Feed ①	14.13	62.94	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75

① Horn bypass.

Note: "100...CH" catalog numbers are specialty sockets for individual utilities and do not follow typical catalog numbering system.

Table 7. Cutler-Hammer Meter Socket Accessories

Cutler-Hammer Catalog Number	Description	Cutler-Hammer Catalog Number	Description
ARP00003CH1	1.00-Inch Hub	ARP00008CH	Small Hub Closure Plate — Aluminum
ARP00004CH12	1.25-Inch Hub	ARP00016CHB	Large Hub Closure Plate
ARP00005CH15	1.50-Inch Hub	ARP00015CHAP	Hub Adapter Plate — Large to Small
ARP00006CH2	2.00-Inch Hub — Small Opening	ARP00035CHJ	Replacement — Plug-in Fifth Terminal (R and RS Models Only)
ARP00007CH25	2.50-Inch Hub — Small Opening	ARP00039CH	Replacement Block Assembly for 100 A Sockets — 2/0 Maximum
ARP00017CH2	2.00-Inch Hub — Large Opening	ARP00048CH	Replacement Block Assembly for 200 A Sockets — 350 Maximum
ARP00018CH25	2.50-Inch Hub — Large Opening	ARP00354CH	Replacement Block Assembly for 150 A Sockets — 250 Maximum
ARP00019CH3	3.00-Inch Hub — Large Opening	ARP00129CH	#4 – 600 kcmil Lug
ARP00021CH4	4.00-Inch Hub — Large Opening	ARP00427CH	#6 – 350 kcmil Dual Lug
ARP00002CHB	Small Hub Closure Plate	ARP00119CH	#6 – 350 kcmil Lug

## Product Selection by Utility

### First Energy (GPU, JCP&L, Penelec & Met Ed)



100 Ampere Single-Position  
Meter Socket (1008947CH)



200 Ampere Single-Position  
Meter Socket (UHTRS223ACH)



320 Ampere Lever Bypass  
Meter Socket (1008948CH)



200 Ampere Lever Bypass  
Meter Socket (UTH7213TCH)

Table 8. First Energy (GPU, JCP&L, Penelec & Met Ed) — Meter Socket Approval List

Cutler-Hammer Catalog Number	Description	Dimensions			Connections		Concentric Knockouts (See Page 11)				
		H	W	D	Line	Load	1	2	3	4	5
<b>100 – 125 Ampere Single-Position — Residential</b>											
1008947CH	125 A, 4 Terminal, SM Hub Open, OH/UG ①②	10.88	8.00	3.50	#8 – 2/0	#8 – 2/0	1.50	1.50	2.00	1.25	—
<b>200 Ampere Single-Position — Residential</b>											
UHTRS202BCH ③	200 A, 4 Terminal, SM Hub Open, OH ①②	14.00	8.00	4.38	#8 – 250 kcmil	#8 – 250 kcmil	2.50	2.50	2.50	—	.50
UHTRS213BCH ③	200 A, 4 Terminal, SM Hub Open, OH/UG ①②	15.00	11.00	4.38	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	2.50	2.50	.50
UHTRS223ACH ③	200 A, 4 Terminal, Solid Top, UG, Meter Right ①②	13.00	13.00	5.00	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	2.50	.50
UBHTRS223ARHCH ③	200 A, 4 Terminal, Solid Top, UG, Meter Left ①②	13.00	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	2.50	.50
<b>200 Ampere Single-Position — Commercial w/ Lever Bypass</b>											
UTH4213B or TCH	200 A, 4 Terminal, SM or LG Hub Open, OH/UG ①④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
UTH5213B or TCH	200 A, 5 Terminal, SM or LG Hub Open, OH/UG ①④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
UTH7213B or TCH	200 A, 7 Terminal, SM or LG Hub Open, OH/UG ①④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
<b>320 Ampere Commercial — Residential w/ Lever Bypass</b>											
1008948CH	320 A, 4 Terminal, LG Hub Open, OH/UG ①④⑤	36.63	15.00	5.69	3/8" Stud	3/8" Stud	3.50	3.50	3.50	3.50	.50
1008949CH	320 A, 5 Terminal, LG Hub Open, OH/UG ①④⑤	39.88	20.00	6.50	3/8" Stud	3/8" Stud	4.00	4.00	4.00	4.00	.50
1008950CH	320 A, 7 Terminal, LG Hub Open, OH/UG ①④⑤	39.88	20.00	6.50	3/8" Stud	3/8" Stud	4.00	4.00	4.00	4.00	.50
<b>100 Ampere Multi-Position — Residential Single-Phase</b>											
1008951CH	100 A, 2 Position, SM Hub Open, OH/UG ①②⑥	14.13	24.31	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1008952CH	100 A, 3 Position, SM Hub Open, OH/UG ①②⑥	14.13	32.47	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1008953CH	100 A, 4 Position, SM Hub Open, OH/UG ①②⑥	14.13	40.63	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1008954CH	100 A, 5 Position, SM Hub Open, OH/UG ①②⑥	14.13	48.78	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1008955CH	100 A, 6 Position, SM Hub Open, OH/UG ①②⑥	14.13	56.94	4.50	#6 – 350 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
<b>200 Ampere Multi-Position — Residential Single-Phase</b>											
UHT2R2332TCH	200 A, 2 Position, LG Hub Open, OH/UG ①②⑥	14.13	24.31	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UHT3R2332TCH	200 A, 3 Position, LG Hub Open, OH/UG ①②⑥	14.13	32.47	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UHT4R2352TCH	200 A, 4 Position, LG Hub Open, OH/UG ①②⑥	14.13	40.63	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UHT5R2392TTCH	200 A, 5 Position, LG Hub Open, OH/UG ①②⑥	14.13	54.78	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UHT6R2392TTCH	200 A, 6 Position, LG Hub Open, OH/UG ①②⑥	14.13	62.94	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75

① Ground connection.

② Horn bypass.

③ Units are able to be converted to 5 terminal single-phase using field-installable kit ARP00035CHJ.

④ Lever bypass.

⑤ Anti-inversion clip installed.

⑥ Center feed.

**Note:** "100...CH" catalog numbers are specialty sockets for individual utilities and do not follow typical catalog numbering system.

Table 9. Cutler-Hammer Meter Socket Accessories

Cutler-Hammer Catalog Number	Description	Cutler-Hammer Catalog Number	Description
ARP00003CH1	1.00-Inch Hub	ARP00008CH	Small Hub Closure Plate — Aluminum
ARP00004CH12	1.25-Inch Hub	ARP00016CHB	Large Hub Closure Plate
ARP00005CH15	1.50-Inch Hub	ARP00015CHAP	Hub Adapter Plate — Large to Small
ARP00006CH2	2.00-Inch Hub — Small Opening	ARP00035CHJ	Replacement — Plug-in Fifth Terminal (R and RS Models Only)
ARP00007CH25	2.50-Inch Hub — Small Opening	ARP00039CH	Replacement Block Assembly for 100 A Sockets — 2/0 Maximum
ARP00017CH2	2.00-Inch Hub — Large Opening	ARP00048CH	Replacement Block Assembly for 200 A Sockets — 350 Maximum
ARP00018CH25	2.50-Inch Hub — Large Opening	ARP00354CH	Replacement Block Assembly for 150 A Sockets — 250 Maximum
ARP00019CH3	3.00-Inch Hub — Large Opening	ARP00129CH	#4 – 600 kcmil Lug
ARP00021CH4	4.00-Inch Hub — Large Opening	ARP00427CH	#6 – 350 kcmil Dual Lug
ARP00002CHB	Small Hub Closure Plate	ARP00119CH	#6 – 350 kcmil Lug

Pennsylvania Power & Light (PP&L)

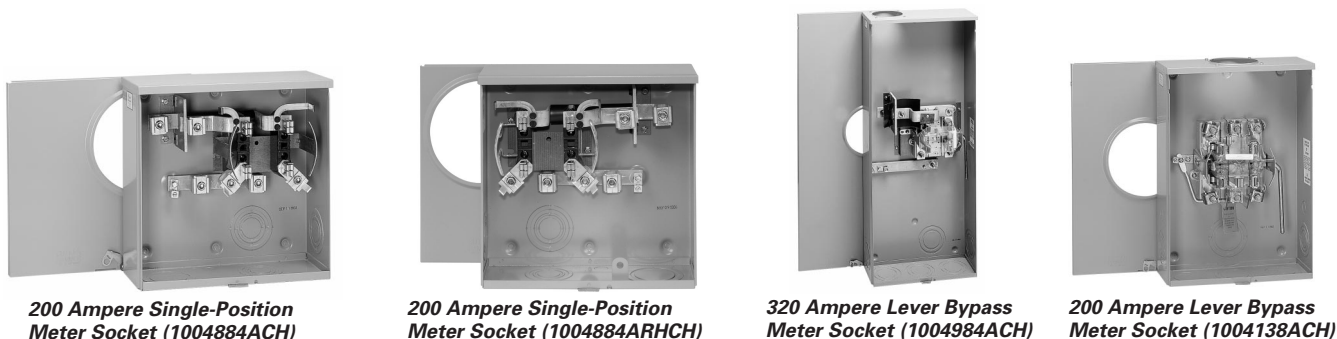


Table 10. Pennsylvania Power & Light (PP&L) — Meter Socket Approval List

Cutler-Hammer Catalog Number	Description	Dimensions			Connections		Concentric Knockouts (See Page 11)				
		H	W	D	Line	Load	1	2	3	4	5
<b>100 Ampere Single-Position — Residential</b>											
1004162ACH	100 A, 4 Terminal, SM Hub Open, OH ①②	10.88	8.00	3.50	#8 – 2/0	#8 – 2/0	1.50	1.50	2.00	1.25	—
<b>200 Ampere Single-Position — Residential</b>											
1004161ACH	200 A, 4 Terminal, SM Hub Open, OH ①②	14.00	8.00	4.38	#8 – 250 kcmil	#8 – 250 kcmil	2.50	2.50	2.50	—	.50
1004884ACH	200 A, 4 Terminal, Solid Top, UG, Meter Right ①②③	13.00	13.00	5.00	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	2.50	.50
1004884ARHCH	200 A, 4 Terminal, Solid Top, UG, Meter Left ①②③	13.00	13.13	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	2.50	.50
1004159ACH	200 A, 4 Terminal, SM Hub Cover Plate, OH/UG ①②	15.00	11.00	4.38	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	2.50	2.50	.50
<b>200 Ampere Single-Position — Commercial w/ Lever Bypass</b>											
1004137ACH	200 A, 5 Terminal, SM Hub Open, OH/UG ④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
1004138ACH	200 A, 7 Terminal, LG Hub Open, OH/UG ④	34.50	15.00	5.69	#4 – 500 kcmil	#4 – 500 kcmil	3.50	3.50	3.50	3.50	.50
<b>320 Ampere Commercial — Residential w/ Lever Bypass</b>											
1004984ACH	320 A, 4 Terminal, LG Hub Open, OH/UG ④	36.63	15.00	5.69	3/8" Stud	3/8" Stud	3.50	3.50	3.50	3.50	.50
1008543CH	320 A, 7 Terminal, LG Hub Closure Plate, UG ④	39.88	20.00	6.50	⑤	⑤	4.00	4.00	4.00	4.00	.50
<b>100 Ampere Multi-Position — Residential Single-Phase</b>											
1004426ACH	100 A, 2 Position, SM Hub Open, OH/UG ①②⑥	14.13	24.31	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1004427ACH	100 A, 3 Position, SM Hub Open, OH/UG ①②⑥	14.13	32.47	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1004428ACH	100 A, 4 Position, SM Hub Open, OH/UG ①②⑥	14.13	40.63	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1004429ACH	100 A, 5 Position, SM Hub Open, OH/UG ①②⑥	14.13	48.78	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
1004430ACH	100 A, 6 Position, SM Hub Open, OH/UG ①②⑥	14.13	56.94	4.50	#6 – 350 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
<b>200 Ampere Multi-Position — Residential Single-Phase</b>											
1004401BCH	200 A, 2 Position, LG Hub Open, OH/UG ①②⑥	14.13	24.31	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
1004404BCH	200 A, 3 Position, LG Hub Open, OH/UG ①②⑥	14.13	32.47	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
1004438BCH	200 A, 4 Position, LG Hub Open, OH/UG ①②⑥	14.13	40.63	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
1004439BCH	200 A, 5 Position, LG Hub Open, OH/UG ①②⑥	14.13	54.78	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
1004440BCH	200 A, 6 Position, LG Hub Open, OH/UG ①②⑥	14.13	62.94	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
<b>400 – 600 Ampere — Residential/Commercial K Base Sockets — Three-Phase</b>											
CH9564K7	480/600 A, 7 Terminal, OH/UG, LG Hub Opening ⑦	43.00	20.00	6.10	.50 – 20 Stud	.50 – 20 Stud	4.00	4.00	4.00	4.00	.75
CH9802K7	480/600 A, 7 Terminal, OH/UG, LG Hub Cover Plate ⑦	37.60	26.00	6.10	.50 – 20 Stud	.50 – 20 Stud	4.00	4.00	4.00	4.00	.75

- ① Ground connection.
- ② Horn bypass.
- ③ Offset design.
- ④ Lever bypass.
- ⑤ Single #600 kcmil/Dual #250 kcmil.
- ⑥ Center fed.
- ⑦ Steel enclosure.

Note: "100...CH" catalog numbers are specialty sockets for individual utilities and do not follow typical catalog numbering system.

Table 11. Cutler-Hammer Meter Socket Accessories

Cutler-Hammer Catalog Number	Description	Cutler-Hammer Catalog Number	Description
ARP00003CH1	1.00-Inch Hub	ARP00008CH	Small Hub Closure Plate — Aluminum
ARP00004CH12	1.25-Inch Hub	ARP00016CHB	Large Hub Closure Plate
ARP00005CH15	1.50-Inch Hub	ARP00015CHAP	Hub Adapter Plate — Large to Small
ARP00006CH2	2.00-Inch Hub — Small Opening	ARP00035CHJ	Replacement — Plug-in Fifth Terminal (R and RS Models Only)
ARP00007CH25	2.50-Inch Hub — Small Opening	ARP00039CH	Replacement Block Assembly for 100 A Sockets — 2/0 Maximum
ARP00017CH2	2.00-Inch Hub — Large Opening	ARP00048CH	Replacement Block Assembly for 200 A Sockets — 350 Maximum
ARP00018CH25	2.50-Inch Hub — Large Opening	ARP00354CH	Replacement Block Assembly for 150 A Sockets — 250 Maximum
ARP00019CH3	3.00-Inch Hub — Large Opening	ARP00129CH	#4 – 600 kcmil Lug
ARP00021CH4	4.00-Inch Hub — Large Opening	ARP00427CH	#6 – 350 kcmil Dual Lug
ARP00002CHB	Small Hub Closure Plate	ARP00119CH	#6 – 350 kcmil Lug



## Product Selection by Utility


### Philadelphia Electric Company (PECO)



100 Ampere Single-Position  
Meter Socket (UBHRS101BCH)



200 Ampere Single-Position  
Meter Socket (UBHRS223ACH)



200 Ampere Single-Position Meter  
Socket (UBHTRS223ARHCH)



320 Ampere Lever Bypass  
Meter Socket (UBH7213TCH)

Table 12. Philadelphia Electric Company (PECO) — Meter Socket Approval List

Cutler-Hammer Catalog Number	Description	Dimensions			Connections		Concentric Knockouts (See Page 11)				
		H	W	D	Line	Load	1	2	3	4	5
<b>100 – 125 Ampere Single-Position — Residential Single-Phase</b>											
UBHRS101BCH	125 A, 4 Terminal SM Hub Open, OH ①②	10.88	8.00	3.50	#8 – 2/0	#8 – 2/0	1.50	1.50	2.00	1.25	—
<b>200 Ampere Single-Position — Residential Single-Phase</b>											
UBHRS202BCH	200 A, 4 Terminal, SM Hub Open, OH ①②	14.00	8.00	4.38	#8 – 250 kcmil	#8 – 250 kcmil	2.50	2.50	2.50	—	.50
UBHRS212CCH	200 A, 4 Terminal, SM Hub Cover Plate, UG ①②	14.00	11.00	4.38	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	2.50	.50
UBHRS223ACH	200 A, 4 Terminal, Offset, UG, Meter Right ①②③	13.00	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	2.50	.50
UBHTRS223ARHCH	200 A, 4 Terminal, Offset, UG, Meter Left ①②③	13.00	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	2.50	2.50	.50
<b>200 Ampere Single-Position — Commercial w/ Lever Bypass</b>											
UBH7213TCH	200 A, 7 Terminal, LG Hub Open, OH/UG ①④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
UBC7213BCH	200 A, 7 Terminal, LG Hub Open, OH/UG ①④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
<b>320 Ampere Commercial — Residential w/ Lever Bypass</b>											
1008435CH	320 A, 4 Terminal, UG, Ground Connection ①③④	26.00	15.00	5.69	#4 – 600 kcmil	#4 – 600 kcmil	3.50	3.50	3.50	3.50	.50
<b>100 Ampere Multi-Position Sockets — Residential Single-Phase</b>											
UBH2R1121BCH	100 A, 2 Position, SM Hub Open, OH/UG ①②⑤	14.13	24.31	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UBH3R1121BCH	100 A, 3 Position, SM Hub Open, OH/UG ①②⑤	14.13	32.47	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UBH4R1121BCH	100 A, 4 Position, SM Hub Open, OH/UG ①②⑤	14.13	40.63	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UBH5R1121BCH	100 A, 5 Position, SM Hub Open, OH/UG ①②⑤	14.13	48.78	4.50	#6 – 250 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
UBH6R1131BCH	100 A, 6 Position, SM Hub Open, OH/UG ①②⑤	14.13	56.94	4.50	#6 – 350 kcmil	#8 – 2/0	2.50	2.50	2.50	2.50	.50
<b>200 Ampere Multi-Position Sockets — Residential Single-Phase</b>											
UBH2R2332TCH	200 A, 2 Position, LG Hub Open, OH/UG ①②⑤	14.13	24.31	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UBH3R2332TCH	200 A, 3 Position, LG Hub Open, OH/UG ①②⑤	14.13	32.47	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UBH4R2352TCH	200 A, 4 Position, LG Hub Open, OH/UG ①②⑤	14.13	40.63	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UBH5R2392TTCH	200 A, 5 Position, LG Hub Open, OH/UG ①②⑤	14.13	54.78	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UBH6R2392TTCH	200 A, 6 Position, LG Hub Open, OH/UG ①②⑤	14.13	62.94	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75

① Barrel lock provision.

② Horn bypass.

③ Solid top.

④ Lever bypass.

⑤ Center fed.

Note: "100...CH" catalog numbers are specialty sockets for individual utilities and do not follow typical catalog numbering system.

Table 13. Cutler-Hammer Meter Socket Accessories

Cutler-Hammer Catalog Number	Description	Cutler-Hammer Catalog Number	Description
ARP00003CH1	1.00-Inch Hub	ARP00008CH	Small Hub Closure Plate — Aluminum
ARP00004CH12	1.25-Inch Hub	ARP00016CHB	Large Hub Closure Plate
ARP00005CH15	1.50-Inch Hub	ARP00015CHAP	Hub Adapter Plate — Large to Small
ARP00006CH2	2.00-Inch Hub — Small Opening	ARP00035CHJ	Replacement — Plug-in Fifth Terminal (R and RS Models Only)
ARP00007CH25	2.50-Inch Hub — Small Opening	ARP00039CH	Replacement Block Assembly for 100 A Sockets — 2/0 Maximum
ARP00017CH2	2.00-Inch Hub — Large Opening	ARP00048CH	Replacement Block Assembly for 200 A Sockets — 350 Maximum
ARP00018CH25	2.50-Inch Hub — Large Opening	ARP000354CH	Replacement Block Assembly for 150 A Sockets — 250 Maximum
ARP00019CH3	3.00-Inch Hub — Large Opening	ARP00129CH	#4 – 600 kcmil Lug
ARP00021CH4	4.00-Inch Hub — Large Opening	ARP00427CH	#6 – 350 kcmil Dual Lug
ARP00002CHB	Small Hub Closure Plate	ARP00119CH	#6 – 350 kcmil Lug

Atlantic City Electric/Delmarva Utility



200 Ampere Single-Position Meter Socket (UHIRS213BCVCH)



200 Ampere Single-Position Meter Socket



320 Ampere Lever Bypass Meter Socket (1009444CH)



200 Ampere Lever Bypass Meter Socket (UIH5213UCVCH)

Table 14. Atlantic City Electric/Delmarva Utility — Meter Socket Approval List

Cutler-Hammer Catalog Number	Description	Dimensions			Connections		Concentric Knockouts (See Page 11)				
		H	W	D	Line	Load	1	2	3	4	5
<b>200 Ampere Single-Position — Residential Single-Phase</b>											
UHIRS213BCVCH	200 A, 5 Terminal, SM Hub Open, OH ①②③	15.00	11.00	4.38	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	2.50	—	.50
UHIRS223ACVCH	200 A, 5 Terminal, SM Hub Cover Plate, UG ①②③	13.00	13.00	4.94	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	3.00	2.50	.50
<b>200 Ampere Single-Position — Commercial w/ Lever Bypass</b>											
UIH5213UCVCH	200 A, 5 Terminal, SM Hub Closure Plate OH/UG ①③④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
UIH7213UCVCH	200 A, 7 Terminal, LG Hub Closure Plate OH/UG ①③④	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
<b>320 Ampere Commercial — Residential Single-Phase w/ Lever Bypass</b>											
1009444CH	320 A, 4 Terminal, LG Hub Cover Plate OH/UG ①③④	36.63	15.00	5.69	3/8-Inch Stud	3/8-Inch Stud	3.50	3.50	3.50	3.50	.50
<b>100 Ampere Multi-Position Sockets — Residential Single-Phase</b>											
Use 200 Ampere											
<b>200 Ampere Multi-Position Sockets — Residential Single-Phase ⑤</b>											
UHI2R2332TCVCH	200 A, 2 Position, LG Hub Open, OH, Ctr Fed ①②③	14.13	24.31	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UHI4R2352TCVCH	200 A, 4 Position, LG Hub Open, OH, Ctr Fed ①②③	14.13	40.63	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UHI6R2392TCVCH	200 A, 6 Position, LG Hub Open, OH, Ctr Fed ①②③	14.13	62.94	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UHI2R2332ACVCH	200 A, 2 Position, Solid Top, UG, Ctr Fed ①②③	14.13	24.31	5.38	#6 – 350 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.50
UHI4R2352ACVCH	200 A, 4 Position, Solid Top, UG, Ctr Fed ①②③	14.13	40.63	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75
UHI6R2392ACVCH	200 A, 5 Position, Solid Top, UG, Ctr Fed ①②③	14.13	62.94	5.38	1/0 – 500 kcmil	#8 – 250 kcmil	2.50	2.50	3.00	2.50	.75

- ① Ground connection.
- ② Horn bypass.
- ③ Inhibitor provided on jaws.
- ④ Lever bypass.
- ⑤ For 3 and 5 gang units, use 4 or 6 gang respectively.


Note: "100...CH" catalog numbers are specialty sockets for individual utilities and do not follow typical catalog numbering system.

Table 15. Cutler-Hammer Meter Socket Accessories

Cutler-Hammer Catalog Number	Description	Cutler-Hammer Catalog Number	Description
ARP00003CH1	1.00-Inch Hub	ARP00008CH	Small Hub Closure Plate — Aluminum
ARP00004CH12	1.25-Inch Hub	ARP00016CHB	Large Hub Closure Plate
ARP00005CH15	1.50-Inch Hub	ARP00015CHAP	Hub Adapter Plate — Large to Small
ARP00006CH2	2.00-Inch Hub — Small Opening	ARP00035CHJ	Replacement — Plug-in Fifth Terminal (R and RS Models Only)
ARP00007CH25	2.50-Inch Hub — Small Opening	ARP00039CH	Replacement Block Assembly for 100 A Sockets — 2/0 Maximum
ARP00017CH2	2.00-Inch Hub — Large Opening	ARP00048CH	Replacement Block Assembly for 200 A Sockets — 350 Maximum
ARP00018CH25	2.50-Inch Hub — Large Opening	ARP00354CH	Replacement Block Assembly for 150 A Sockets — 250 Maximum
ARP00019CH3	3.00-Inch Hub — Large Opening	ARP00129CH	#4 – 600 kcmil Lug
ARP00021CH4	4.00-Inch Hub — Large Opening	ARP00427CH	#6 – 350 kcmil Dual Lug
ARP00002CHB	Small Hub Closure Plate	ARP00119CH	#6 – 350 kcmil Lug

## Product Selection by Utility

### Delaware Electric Co-Op



**100 Ampere Single-Position  
Meter Socket (UHTRS101BCH)**



**200 Ampere Single-Position  
Meter Socket (UHTRS213CCH)**



**320 Ampere Lever Bypass  
Meter Socket (UTH4330VCH)**



**200 Ampere Lever Bypass  
Meter Socket (UTH7213CCH)**

**Table 16. Delaware Electric Co-Op — Meter Socket Approval List**

Cutler-Hammer Catalog Number	Description	Dimensions			Connections		Concentric Knockouts (See Page 11)				
		H	W	D	Line	Load	1	2	3	4	5
<b>100 – 125 Ampere Single-Position — Residential Single-Phase</b>											
UHTRS101BCH	125 A, 4 Terminal, SM Hub Open, OH/UG ①②	10.88	8.00	3.50	#8 – 2/0	#8 – 2/0	1.50	1.50	2.00	1.25	—
UHTRS101LCH	125 A, 4 Terminal, 1.25-Inch Hub Installed, OH/UG ①②	10.88	8.00	3.50	#8 – 2/0	#8 – 2/0	1.50	1.50	2.00	1.25	—
<b>200 Ampere Single-Position — Residential Single-Phase</b>											
UHTRS202BCH	200 A, 4 Terminal, SM Hub Open, OH ①②	14.00	8.00	4.38	#8 – 250 kcmil	#8 – 250 kcmil	2.50	2.50	2.50	2.50	.50
UHTRS213CCH	200 A, 4 Terminal, SM Hub Cover Plate, OH/UG ①②	15.00	11.00	4.38	#8 – 350 kcmil	#8 – 350 kcmil	2.50	2.50	2.50	2.50	.50
<b>200 Ampere Single-Position — Commercial w/ Lever Bypass</b>											
UTH7213C or UCH	200 A, 7 Terminal, Hub Closure Plate, OH/UG ①③	19.00	13.00	4.94	#6 – 350 kcmil	#6 – 350 kcmil	3.00	2.50	3.00	3.00	.50
<b>320 Ampere Commercial — Residential Single-Phase w/ Lever Bypass</b>											
UTH4300UCH	320 A, 4 Terminal, LG Hub Cover Plate, OH ①③	34.50	13.00	4.94	3/8-Inch Stud	3/8-Inch Stud	3.00	3.00	3.00	3.00	.50
UTH4330UCH	320 A, 4 Terminal, LG Hub Cover Plate, OH/UG ①③	36.63	15.00	5.69	3/8-Inch Stud	3/8-Inch Stud	3.50	3.50	3.50	3.50	.50
UTH7300UCH	320 A, 7 Terminal, LG Hub Cover Plate, OH ①③	34.50	15.00	5.69	3/8-Inch Stud	3/8-Inch Stud	3.50	3.50	3.50	3.50	.50
UTH7330UCH	320 A, 7 Terminal, LG Hub Cover Plate, OH/UG ①③	39.88	20.00	6.50	3/8-Inch Stud	3/8-Inch Stud	4.00	4.00	4.00	4.00	.50

① Ground connection.

② Horn bypass.

③ Lever bypass.

**Table 17. Cutler-Hammer Meter Socket Accessories**


Cutler-Hammer Catalog Number	Description	Cutler-Hammer Catalog Number	Description
ARP00003CH1	1.00-Inch Hub	ARP00008CH	Small Hub Closure Plate — Aluminum
ARP00004CH12	1.25-Inch Hub	ARP00016CHB	Large Hub Closure Plate
ARP00005CH15	1.50-Inch Hub	ARP00015CHAP	Hub Adapter Plate — Large to Small
ARP00006CH2	2.00-Inch Hub — Small Opening	ARP00035CHJ	Replacement — Plug-in Fifth Terminal (R and RS Models Only)
ARP00007CH25	2.50-Inch Hub — Small Opening	ARP00039CH	Replacement Block Assembly for 100 A Sockets — 2/0 Maximum
ARP00017CH2	2.00-Inch Hub — Large Opening	ARP00048CH	Replacement Block Assembly for 200 A Sockets — 350 Maximum
ARP00018CH25	2.50-Inch Hub — Large Opening	ARP00354CH	Replacement Block Assembly for 150 A Sockets — 250 Maximum
ARP00019CH3	3.00-Inch Hub — Large Opening	ARP00129CH	#4 – 600 kcmil Lug
ARP00021CH4	4.00-Inch Hub — Large Opening	ARP00427CH	#6 – 350 kcmil Dual Lug
ARP00002CHB	Small Hub Closure Plate	ARP00119CH	#6 – 350 kcmil Lug



May 2007

Technical Data

**Knockout Drawings**

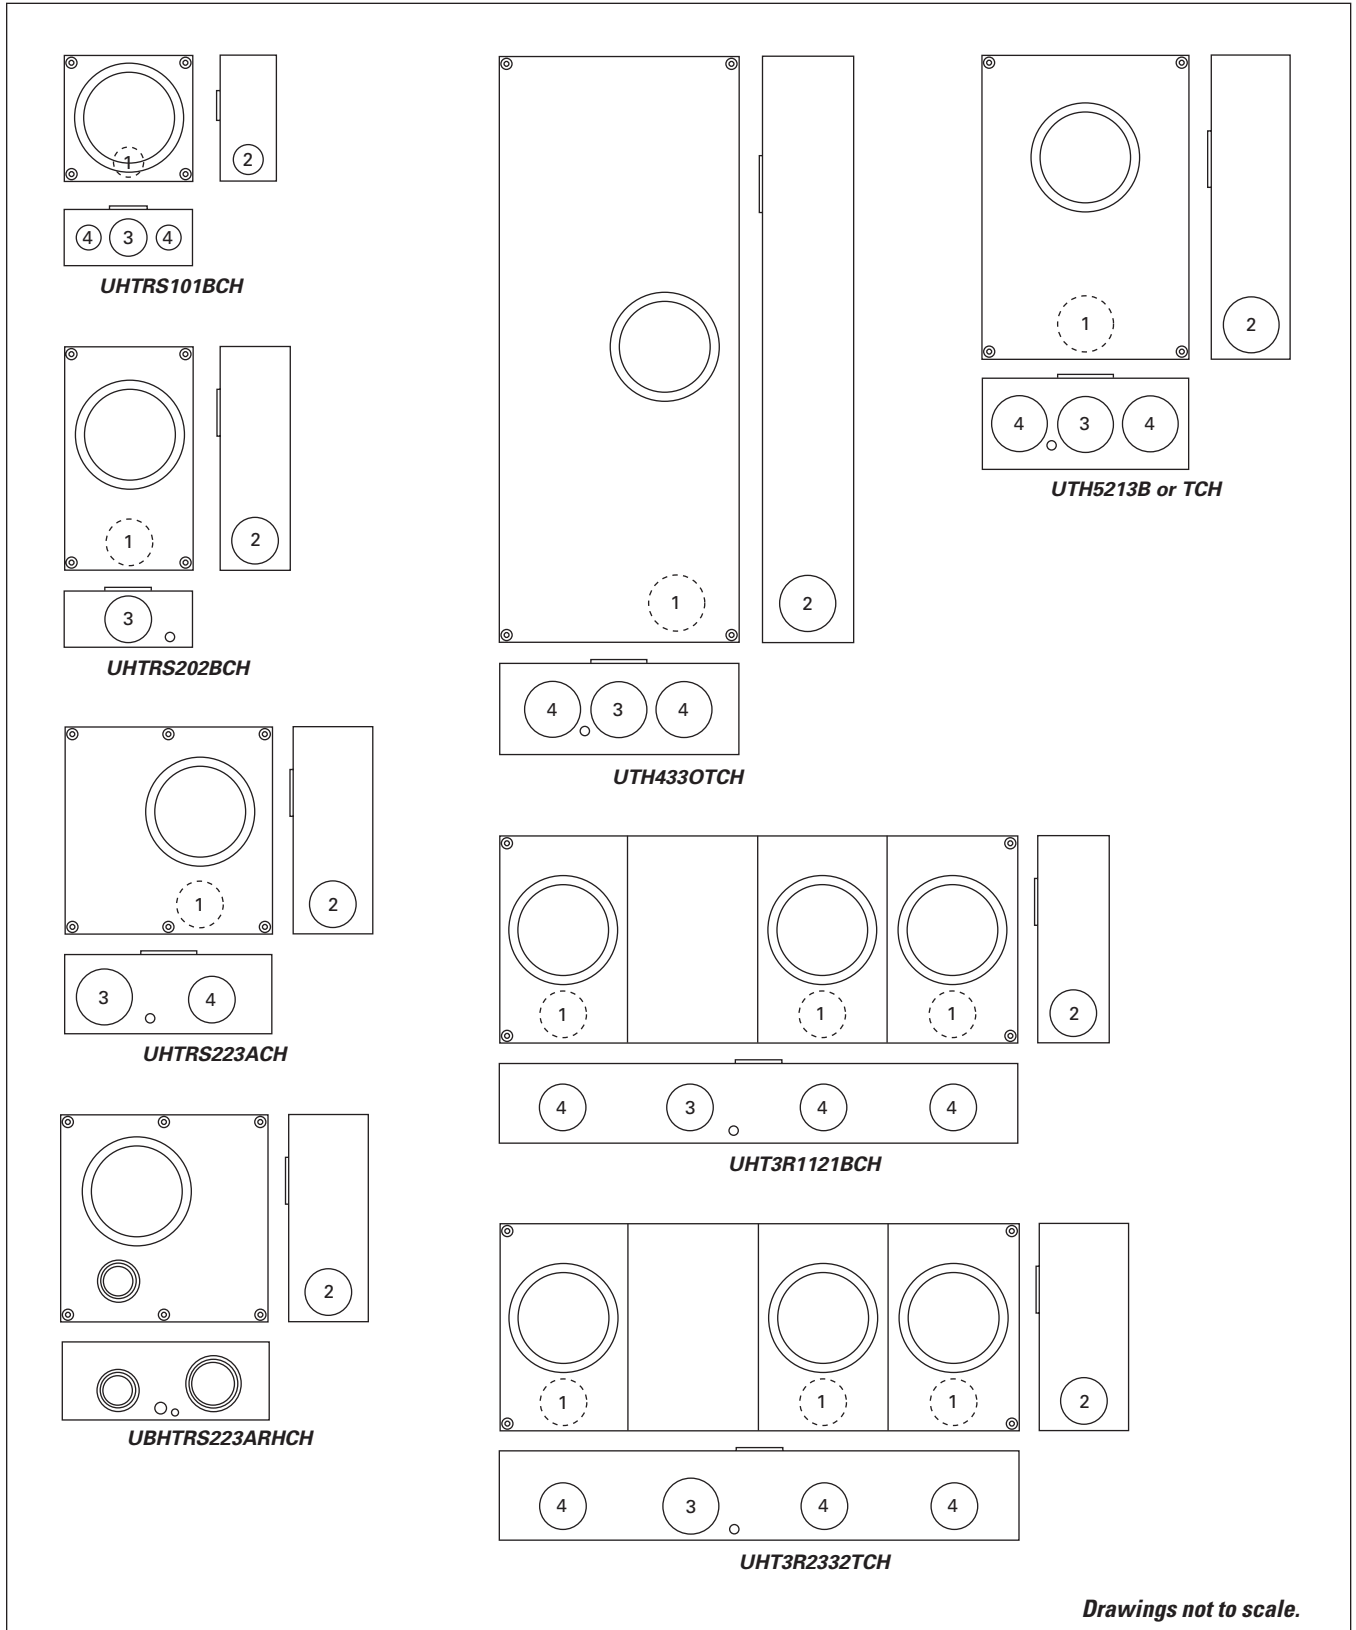

*Drawings not to scale.*

**Figure 1. Knockout Drawings**

Meter Packs

Product Description




Meter Pack

- Cutler-Hammer 1MP units by Eaton Electrical are self-contained (main terminal box included) for installations requiring up to six meter socket positions in a single enclosure.
- Units are not gangable with any other metering device.
- Approved by major power companies, UL listed, suitable as service equipment and meets the service and electrical requirements of EUSERC and CECHA.
- Series rating up to 100 kAIC.
- All ringless cover devices include fifth jaw as standard.
- Ring type devices do not include fifth jaw as standard. Order 1MM5JK if needed.
- Bondable neutral.
- 120/240 Vac, single-phase, 3-wire metering device.
- Up to 600 amperes maximum horizontal bus rating.
- Incoming lugs not included (phase A, phase B, and neutral).
- Indoor/outdoor construction.
- Provision for 2-pole breaker (plug-on type for 125 ampere sockets and bolt-on type for 200 ampere sockets) — circuit breakers not included.
- Underground incoming feed.
- Aluminum or copper bus.

Product Selection

Table 18. Meter Pack Catalog Numbering System

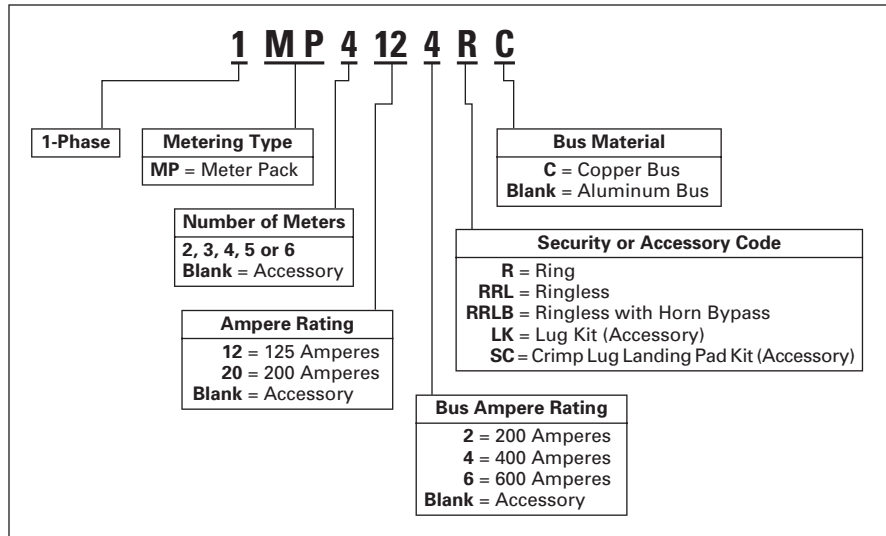

When Ordering:

1. Determine catalog number of the basic device.
2. Include Lug Kit for incoming section. See Table 22.
3. Find quantity and catalog numbers for tenant circuit breakers. (Order one breaker per socket.) See Page 14.
4. Select required accessories. See Page 17.

Table 19. Meter Packs — Aluminum Bus

Socket Ampere Rating	Number of Meter Sockets	Bus Ampere Rating	Main Tenant Breaker Type ①	Catalog Number	Semi-flush Flange Kit Catalog Number
<b>Ringless Style Meter Socket Covers ②</b>					
125	2	200	Plug-on Type	1MP2122RRL ③④	1MPSFK1
	2	200	Plug-on Type	1MP2122RRRLC	1MPSFK1
	3	400	BR_	1MP3124RRL	1MPSFK2
	4	400	BRH_	1MP4124RRL	1MPSFK2
	5	600	BRHH_	1MP5126RRL	1MPSFK3
	6	600	—	1MP6126RRL	1MPSFK3
200	2	400	Bolt-on Type	1MP2204RRL	1MPSFK4
	3	600	CC2_X	1MP3206RRL	1MPSFK5
	4	600	CHH2_H2X	1MP4206RRL	1MPSFK5
	5	600	CHH2_H4X	1MP5206RRL	1MPSFK6
	6	600	CHH_X	1MP6206RRL	1MPSFK6
	<b>Ringless Style Covers with Horn Bypass ②</b>				
125	2	200	Plug-on Type	1MP2122RRRLB ③④⑤	1MPSFK1
	2	200	Plug-on Type	1MP2122RRRLBC ⑤	1MPSFK1
	3	400	BR_	1MP3124RRRLB ⑤	1MPSFK2
	4	400	BRH_	1MP4124RRRLB ⑤	1MPSFK2
	5	600	BRHH_	1MP5126RRRLB ⑤	1MPSFK3
	6	600	—	1MP6126RRRLB ⑤	1MPSFK3
200	2	400	Bolt-on Type	1MP2204RRRLB ⑤	1MPSFK4
	3	600	CC2_X	1MP3206RRRLB ⑤	1MPSFK5
	4	600	CHH2_H2X	1MP4206RRRLB	1MPSFK5
	5	600	CHH2_H4X	1MP5206RRRLB ⑤	1MPSFK6
	6	600	CHH_X	1MP6206RRRLB ⑤	1MPSFK6

① See Table 24.  
 ② Fifth jaw factory installed at 9 o'clock position.  
 ③ Main lugs included. #6 – 300 kcmil. (Optional lugs are not available.)  
 ④ Bottom feed only.  
 ⑤ CECHA approved.  
**Note:** See Table 22 for Main Lug Kit Selection. See Table 23 for Wire Sizes.

**Table 20. Meter Packs — Copper Bus**

Socket Ampere Rating	Number of Meter Sockets	Bus Ampere Rating	Main Tenant Breaker Type <sup>①</sup>	Catalog Number	Semi-flush Flange Kit Catalog Number
<b>Ringless Style Meter Socket Covers <sup>②</sup></b>					
125	3	400	Plug-on Type	1MP3124RRLC	1MP5FK2
	4	400	BR_	1MP4124RRLC	1MP5FK2
	5	600	BRH_	1MP5126RRLC	1MP5FK3
	6	600	BRHH_	1MP6126RRLC	1MP5FK3
200	2	400	Bolt-on Type	1MP2204RRLC	1MP5FK4
	3	600	CC2_X	1MP3206RRLC	1MP5FK5
	4	600	CHH2_H2X	1MP4206RRLC	1MP5FK5
	5	600	CHH2_H4X	1MP5206RRLC	1MP5FK6
6	600	CHH_X	1MP6206RRLC	1MP5FK6	

**Ringless Style Covers with Horn Bypass <sup>②③</sup>**

Socket Ampere Rating	Number of Meter Sockets	Bus Ampere Rating	Main Tenant Breaker Type	Catalog Number	Semi-flush Flange Kit Catalog Number
125	3	400	Plug-on Type	1MP3124RRLBC	1MP5FK2
	4	400	BR_	1MP4124RRLBC	1MP5FK2
	5	600	BRH_	1MP5126RRLBC	1MP5FK3
	6	600	BRHH_	1MP6126RRLBC	1MP5FK3
200	2	400	Bolt-on Type	1MP2204RRLBC	1MP5FK4
	3	600	CC2_X	1MP3206RRLBC	1MP5FK5
	4	600	CHH2_H2X	1MP4206RRLBC	1MP5FK5
	5	600	CHH2_H4X	1MP5206RRLBC	1MP5FK6
6	600	CHH_X	1MP6206RRLBC	1MP5FK6	

<sup>①</sup> See Table 24.

<sup>②</sup> Fifth jaw factory installed at 9 o'clock position.

<sup>③</sup> CECHA approved.

**Table 21. CECHA Approved Meter Socket Accessories**

Description	Catalog Number
<b>Pedestal Trough Raceway for Underground Services <sup>④</sup></b>	
36.00-Inch Pedestal Trough Raceway (36.00" H 9.00" W 4.25" D)	1008934CH
<b>Adapter Plates</b>	
Adapter Plate for 2 – 4 Gang	1MP34EW125
Adapter Plate for 5 – 6 Gang	1MP56EW125

<sup>④</sup> Bottom raceway adapter plates required.

**Table 22. Main Lug Kit Selection — Field Installed Kits for Either 400 or 600 Ampere Main Bus**

Line Lug and Wire Sizes Order Separately and Field Install	Line Lug Kit Catalog Number Order Three Kits (For Two Lines and Neutral)
(1) #6 – 600 kcmil or (2) 2/0 – 250 kcmil (2) 250 – 500 kcmil (3) #4 – 300 kcmil (1) 750 kcmil Crimp lug landing pad 250 – 750 kcmil	1MPLK1 1MPLK3 1MPLK4 1MPLK2 <sup>⑤</sup> 1MPSC1 <sup>⑥</sup>

<sup>⑤</sup> This lug is not UL listed.

<sup>⑥</sup> This kit comes with three pads for two lines and neutral. Each pad will accept one or two crimp lugs. Cannot be used on 1MP2122R, RL and RLB EUSERC underground termination.

**Table 23. Wire Sizes — Neutral and Ground Lugs**

Description	Wire Size, Al/Cu	Catalog Number
Neutral: 125 ampere meter pack 200 ampere meter pack	#6 – 2/0 #1/0 – 300 kcmil	— —
Equipment Ground Bar: 125 ampere meter pack 200 ampere meter pack	#14 – #2 #14 – 2/0	— —
Optional Ground Bar	#6 – 2/0	1MMGBK

**Note:** Each stack includes a neutral and ground bar. If an extra ground bar is needed, order 1MMGBK.

## Main Tenant Circuit Breakers

### Product Description

#### 1MP, 1MM and 3MM Main Tenant Circuit Breakers

The following Cutler-Hammer breakers are to be used on 1MP, 1MM and 3MM modular metering stacks. They are 120/240 Vac — field installed.



BR2100



CC2200

### Product Selection

Table 24. 1MP, 1MM and 3MM Main Tenant Circuit Breakers

Description	Number of Poles	Main Tenant Circuit Breaker Ampere Rating	Catalog Number				
			10,000 AIC	22,000 AIC	25,000 AIC	42,000 AIC	100,000 AIC
Plug-on type circuit breakers used with 1MP, 1MM and 3MM 125 ampere modular metering stacks	2	60	BR260	BRH260	—	BRHH260	—
	2	70	BR270	BRH270	—	BRHH270	—
	2	80	BR280	BRH280	—	BRHH280	—
	2	90	BR290	BRH290	—	BRHH290	—
	2	100	BR2100	BRH2100	—	BRHH2100	—
	2	110	BR2110	BRH2110	—	BRHH2110	—
Bolt-on type circuit breakers used with 1MP, 1MM and 3MM 200 ampere modular metering stacks	2	125	BR2125	BRH2125	—	BRHH2125	—
	2	60	—	—	CHH2060H2X	CHH2060H4X	CHH2060X
	2	70	—	—	CHH2070H2X	CHH2070H4X	CHH2070X
	2	80	—	—	CHH2080H2X	CHH2080H4X	CHH2080X
	2	90	—	—	CHH2090H2X	CHH2090H4X	CHH2090X
	2	100	CC2100X	—	CHH2100H2X	CHH2100H4X	CHH2100X
	2	125	CC2125X	—	CHH2125H2X	CHH2125H4X	CHH2125X
	2	150	CC2150X	—	CHH2150H2X	CHH2150H4X	CHH2150X
	2	175	CC2175X	—	CHH2175H2X	CHH2175H4X	CHH2175X
	2	200	CC2200X	—	CHH2200H2X	CHH2200H4X	CHH2200X

Dimensions and Knockouts (in Inches) — 1MP Meter Packs — Aluminum and Copper Bus

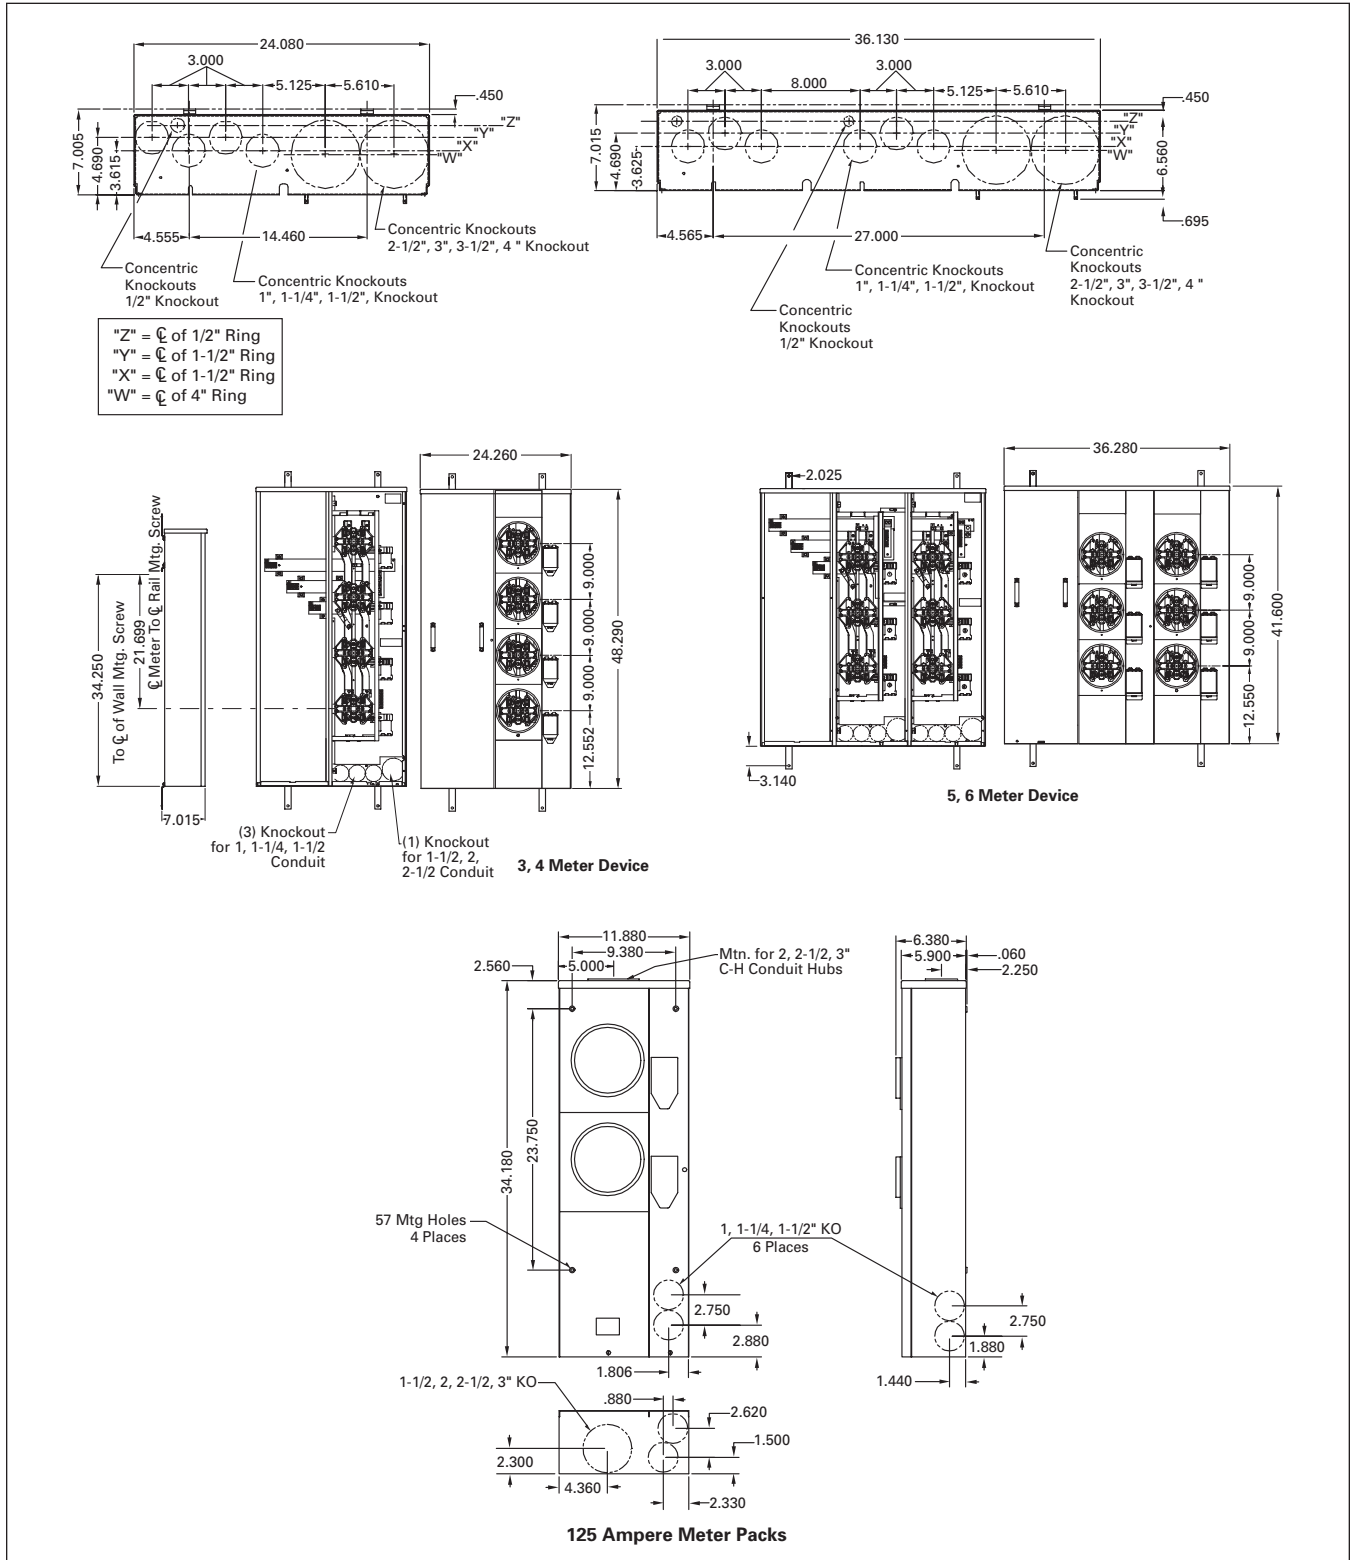


Figure 2. 125 Ampere Maximum Tenant Breaker

Meter Packs

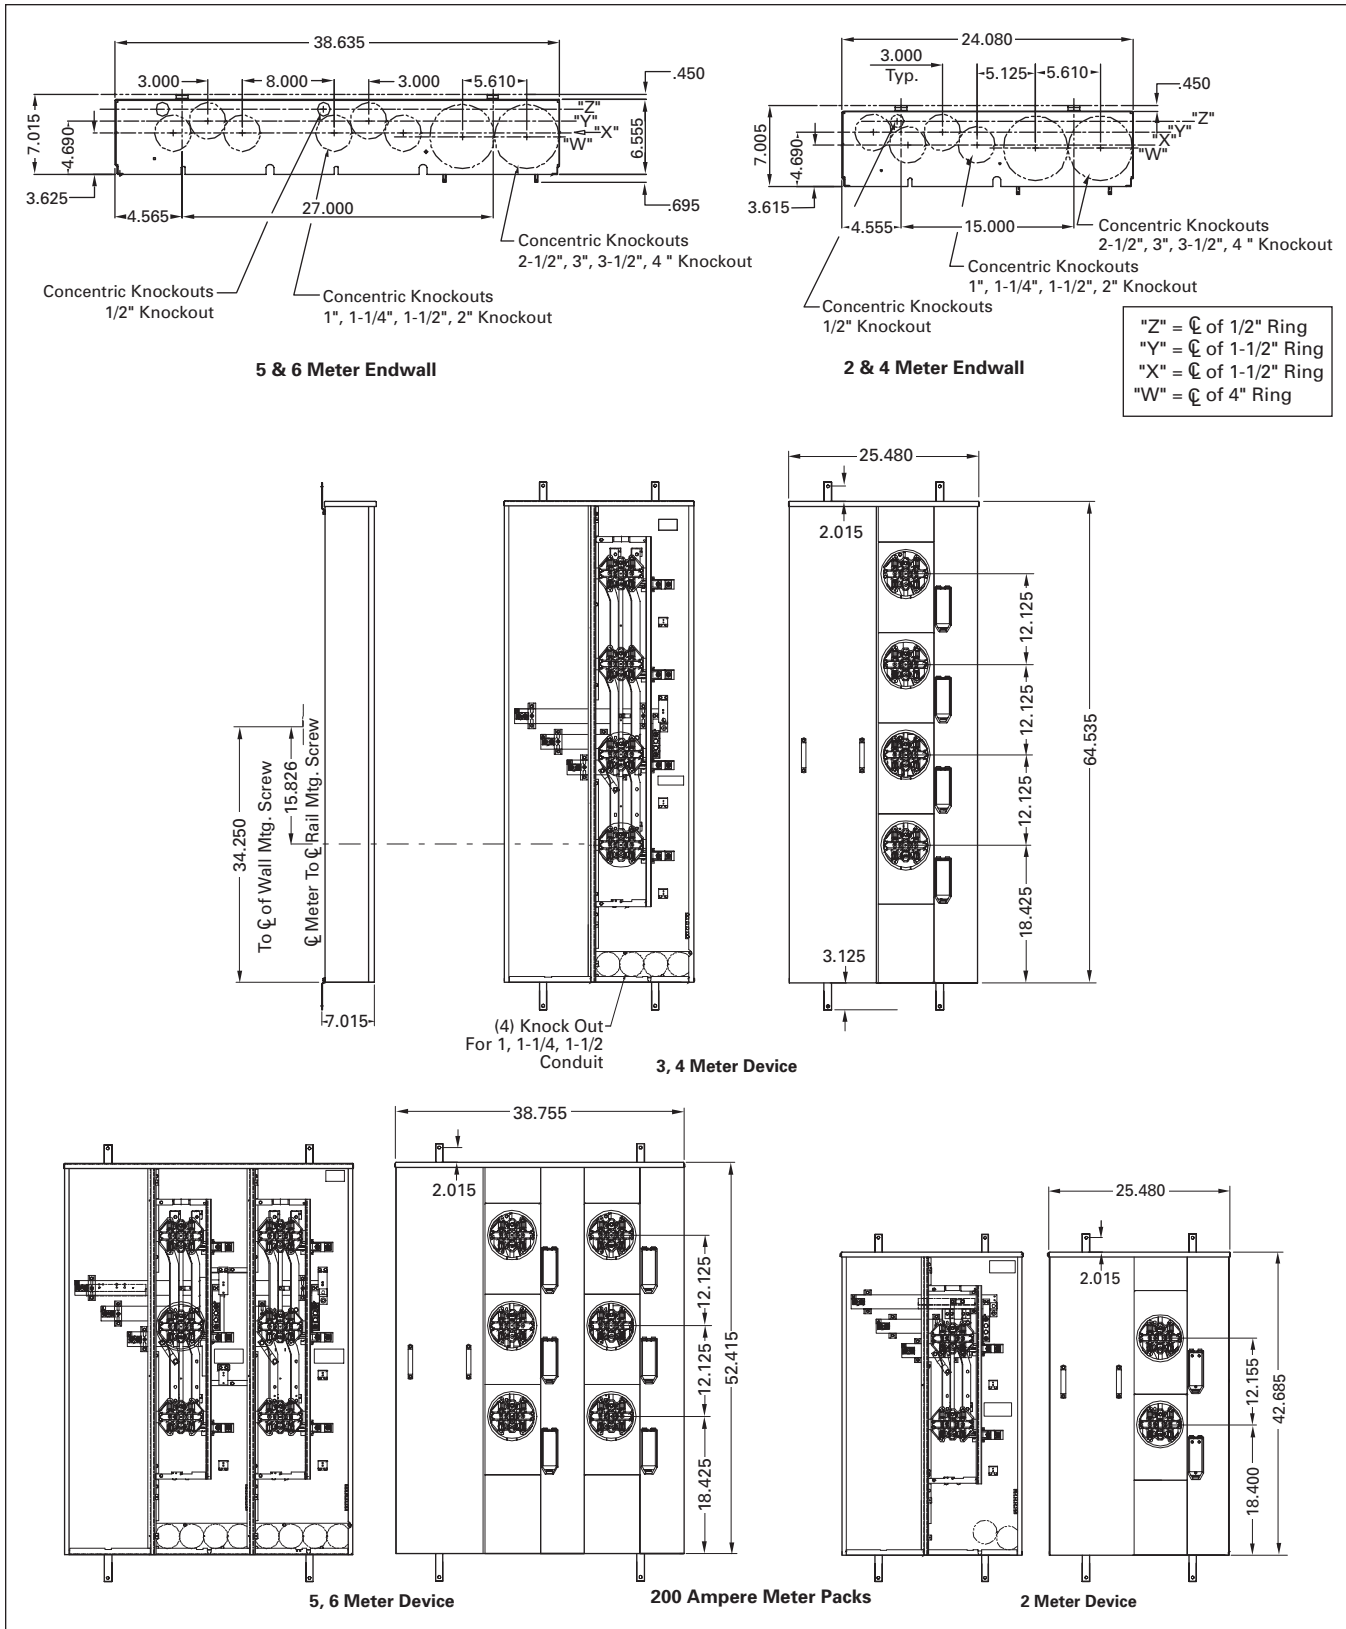


Figure 3. 200 Ampere Maximum Tenant Breaker

**Meter Packs**

**Table 25. Accessories for 1MP, 1MM and 3MM Modular Metering Stacks**


Description	Application	Catalog Number
Fifth Jaw Kit	Bolted onto neutral in the 3, 6 or 9 o'clock position. Typically used on network metering systems (3-phase in/single-phase out) or when specified by utility company.	1MM5JK
Isolated Fifth Jaw Kit	Connects to the neutral with an insulated wire.	1MM5JKOP
Horn Bypass	Used only on ringless cover stacks, kits can be installed on 125 ampere or 200 ampere sockets. <b>Note:</b> For 1MP2122RRL use:	1MMBPH WCG8HB
Meter Bypass Jumper	Installed on 125 ampere or 200 ampere sockets. Jumpers are plugged into jaws. Order Lexan® cover plate with bypass jumpers to prevent access to meter socket once energized. (Not UL listed.)	1MMBPJ
Lexan Blank Cover	Circular cover mounted on ring or ringless devices preventing access to meter socket while meter is not in place. Includes 4 plastic tabs which plug into each jaw.	1MMPCP
	Same as 1MMPCP minus the tabs located in the back to plug into jaws. This device to be used while meter bypass jumpers are in place (1MMBPJ).	1MMACP
Blank Meter Socket Cover	Used for 125 ampere stacks. Fits bottom socket only. Kit replaces existing meter cover preventing access to meter socket. Includes hasp for seal.	1MMBC125B
	Used on 200 ampere stacks. Fits bottom socket only. Kit replaces existing meter cover preventing access to meter socket. Includes hasp for seal.	1MMBC200B
Wall Mounting Rail	Rails are 4 feet (1.2 m) in length. Bolted on wall for stacks, packs, and mains to be hung.	1MMWB
Bussed Spacer	Bussed spacer 1200 ampere 4-inch (101.6 mm). Required when stacks are mounted on right-hand side in EUSERC areas. (Copper)	3MMBSK
Bus Duct Riser/ Meter Center Connection	Available in 400, 600, 800 ampere Main Fusible units only. Contact Product Line for details.	—



*Fifth Jaw Kit*



*Horn Bypass Kit*



*Lexan Blank Cover*



*Wall Mounting Rail*



*Bussed Spacer*

INNER-TITE is a registered trademark of Inner-Tite Corp. Lexan is a registered trademark of General Electric Co., USA. UL is a registered trademark of Underwriters Laboratories Inc.



---

*This page intentionally left blank.*

May 2007

---

*This page intentionally left blank.*

Eaton Corporation  
Electrical Group  
1000 Cherrington Parkway  
Moon Township, PA 15108  
United States  
877-ETN CARE (877-386-2273)  
Eaton.com