




Atlanta, Georgia

Phone 800-521-7326

Fax 770-745-1333

Flat Washer SAE Zinc

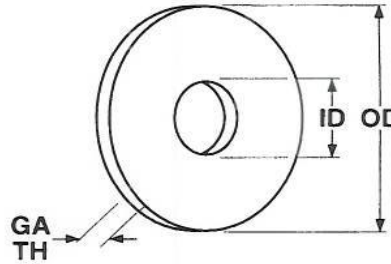

See
Section
5 of Our
Catalog

Bolt Size	Outside Diameter			Inside Diameter			Thickness			Approximate Quantity in 50 Lbs.
	Nominal	Min	Max	Nominal	Min	Max	Gauge	Min	Max	
4	5/16	0.307	0.320	1/8	0.120	0.133	1/32	0.0250	0.0400	83,300
6	3/8	0.370	0.390	5/32	0.151	0.164	3/64	0.0360	0.0650	39,500
8	7/16	0.433	0.453	3/16	0.183	0.196	3/64	0.0360	0.0650	29,500
10	1/2	0.495	0.515	7/32	0.214	0.227	3/64	0.0360	0.0650	22,750
3/16	9/16	0.557	0.577	1/4	0.245	0.265	3/64	0.0360	0.0650	18,500
12	9/16	0.557	0.577	1/4	0.245	0.265	1/16	0.0510	0.0800	14,700
1/4	5/8	0.620	0.640	9/32	0.276	0.296	1/16	0.0510	0.0800	11,100
5/16	11/16	0.681	0.703	11/32	0.339	0.359	1/16	0.0510	0.0800	9,750
3/8	13/16	0.805	0.827	13/32	0.401	0.419	1/16	0.0510	0.0800	7,000
7/16	59/64	0.915	0.937	15/32	0.464	0.484	1/16	0.0510	0.0800	5,500
1/2	1-1/16	1.055	1.092	17/32	0.526	0.546	3/32	0.0740	0.1210	2,800
9/16	1-3/16	1.149	1.186	19/32	0.589	0.609	3/32	0.0740	0.1210	2,250
5/8	1-5/16	1.305	1.342	21/32	0.649	0.696	3/32	0.0740	0.1210	1,850
3/4	1-1/2	1.462	1.499	13/16	0.805	0.842	9/64	0.1080	0.1600	1,050
7/8	1-3/4	1.743	1.780	15/16	0.931	0.968	9/64	0.1080	0.1600	775
1	2	1.993	2.030	1-1/16	1.055	1.092	9/64	0.1080	0.1600	585
1-1/8	2-1/4	2.243	2.280	1-3/16	1.243	1.280	9/64	0.1080	0.1600	460
1-1/4	2-1/2	2.493	2.530	1-5/16	1.368	1.405	5/32	0.1360	0.1920	335
1-3/8	2-3/4	2.743	2.780	1-7/16	1.493	1.530	5/32	0.1360	0.2130	275
1-1/2	3	2.993	3.030	1-9/16	1.618	1.655	5/32	0.1530	0.2130	230

Cold rolled steel, may be forged

ANSI B18.22.1

Peco Fasteners specification sheets are a reference guide to help in the selection of fasteners. Peco has made every effort to ensure the accuracy of the information. However, Peco Fasteners is not responsible for any errors that may be contained within these sheets. Peco Fasteners makes no claim of warranty in the accuracy of this information. Users of this information are solely responsible for protecting themselves against liability. It is solely the responsibility of the purchasers and users of these fasteners to consult with Engineers that are experts in an applicable field. Peco Fasteners is not responsible for any loss, claim, or damage due to these specification sheets.

9/19/2014




Atlanta, Georgia

Phone 800-521-7326

Fax 770-745-1333

Flat Washer SAE Zinc

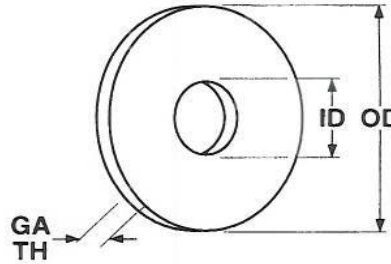

See
Section
5 of Our
Catalog

Bolt Size	Outside Diameter			Inside Diameter			Thickness			Approximate Quantity in 50 Lbs.
	Nominal	Min	Max	Nominal	Min	Max	Gauge	Min	Max	
4	5/16	0.307	0.320	1/8	0.120	0.133	1/32	0.0250	0.0400	83,300
6	3/8	0.370	0.390	5/32	0.151	0.164	3/64	0.0360	0.0650	39,500
8	7/16	0.433	0.453	3/16	0.183	0.196	3/64	0.0360	0.0650	29,500
10	1/2	0.495	0.515	7/32	0.214	0.227	3/64	0.0360	0.0650	22,750
3/16	9/16	0.557	0.577	1/4	0.245	0.265	3/64	0.0360	0.0650	18,500
12	9/16	0.557	0.577	1/4	0.245	0.265	1/16	0.0510	0.0800	14,700
1/4	5/8	0.620	0.640	9/32	0.276	0.296	1/16	0.0510	0.0800	11,100
5/16	11/16	0.681	0.703	11/32	0.339	0.359	1/16	0.0510	0.0800	9,750
3/8	13/16	0.805	0.827	13/32	0.401	0.419	1/16	0.0510	0.0800	7,000
7/16	59/64	0.915	0.937	15/32	0.464	0.484	1/16	0.0510	0.0800	5,500
1/2	1-1/16	1.055	1.092	17/32	0.526	0.546	3/32	0.0740	0.1210	2,800
9/16	1-3/16	1.149	1.186	19/32	0.589	0.609	3/32	0.0740	0.1210	2,250
5/8	1-5/16	1.305	1.342	21/32	0.649	0.696	3/32	0.0740	0.1210	1,850
3/4	1-1/2	1.462	1.499	13/16	0.805	0.842	9/64	0.1080	0.1600	1,050
7/8	1-3/4	1.743	1.780	15/16	0.931	0.968	9/64	0.1080	0.1600	775
1	2	1.993	2.030	1-1/16	1.055	1.092	9/64	0.1080	0.1600	585
1-1/8	2-1/4	2.243	2.280	1-3/16	1.243	1.280	9/64	0.1080	0.1600	460
1-1/4	2-1/2	2.493	2.530	1-5/16	1.368	1.405	5/32	0.1360	0.1920	335
1-3/8	2-3/4	2.743	2.780	1-7/16	1.493	1.530	5/32	0.1360	0.2130	275
1-1/2	3	2.993	3.030	1-9/16	1.618	1.655	5/32	0.1530	0.2130	230

Cold rolled steel, may be forged

ANSI B18.22.1

Peco Fasteners specification sheets are a reference guide to help in the selection of fasteners. Peco has made every effort to ensure the accuracy of the information. However, Peco Fasteners is not responsible for any errors that may be contained within these sheets. Peco Fasteners makes no claim of warranty in the accuracy of this information. Users of this information are solely responsible for protecting themselves against liability. It is solely the responsibility of the purchasers and users of these fasteners to consult with Engineers that are experts in an applicable field. Peco Fasteners is not responsible for any loss, claim, or damage due to these specification sheets.

9/19/2014