
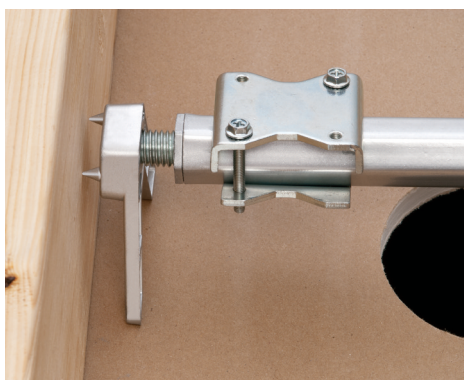


# Fan/Fixture Box with Adjustable Bracket

**NEW!**  
Weight  
Ratings

*Now with HIGHER Weight Ratings • For Retrofit*

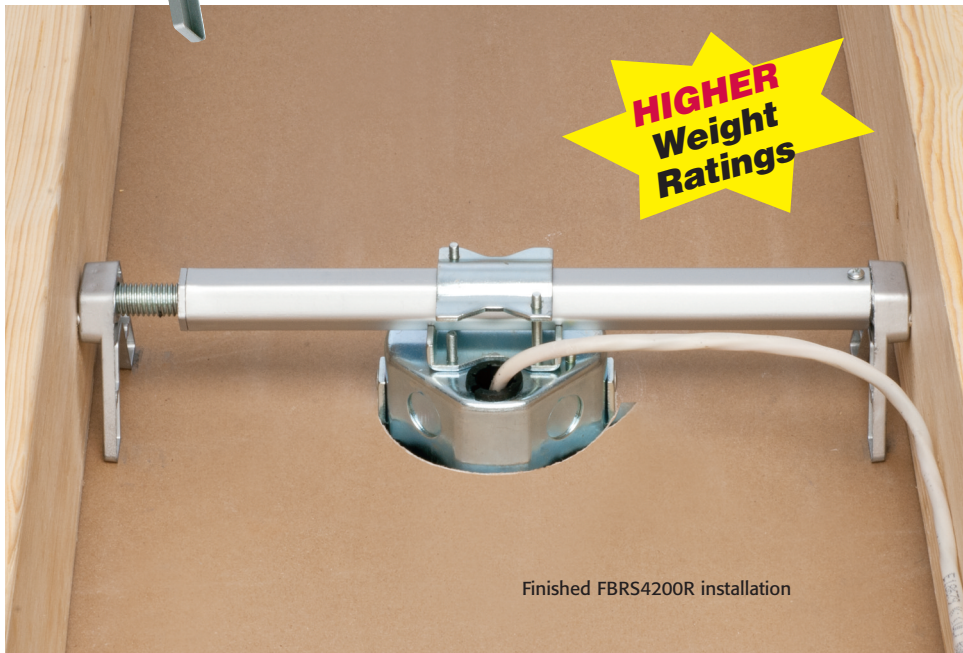

Bracket ends bite into wood



Holds a 70 lb fan

Arlington's extra heavy-duty, **plated steel fan/fixture box** now has higher UL weight ratings:

**150 lbs for fixtures • 70 lbs for fans** when installed on joists spaced 16" on center; **70 lbs for fans, 90 lbs for a fixture** on joists spaced 24" on-center. CSA rated for 50 lb fan or fixture.

Our FBR54200R features a fully adjustable bracket for installations between joists or rafters spaced from 16" to 24" on center. Bracket ends bite into the wood rafter or joist, holding the fan or fixture securely in place.

- Fast, easy installation in old work/retrofit projects
- 20.0 cubic inch capacity, 2 inch box depth
- No parts to lose...installation screws ship captive, with an installed mud cover and NM cable connector
- UL/CSA Listed



**Arlington**

1 Stauffer Industrial Park  
Scranton, PA 18517  
800/233.4717  
Fax 570/562.0646  
[www.aifittings.com](http://www.aifittings.com)

Patented

# Fan/Fixture Box with Adjustable Bracket

*Installs between rafters spaced 16" to 24" on center*

Easy, secure fan or fixture installation in retrofit projects




1 Determine location of fan/fixture. Cut a 4-1/16" diameter hole in ceiling. Remove box (only) from the bracket. Loosen screws on sled to enable centering above hole (step 5). Insert bracket through the opening.




2 Position bracket between joists with "feet" resting on the ceiling. Embed bracket ends in joists by turning the hex bar by hand...



3 ...then tightening with a wrench.

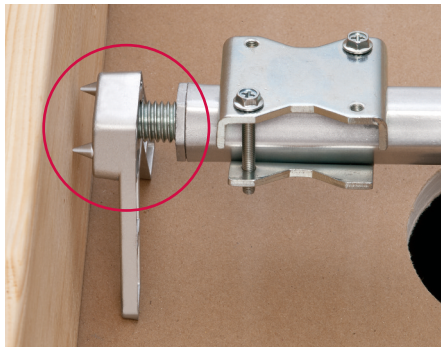

4 As the hex bar is tightened, the bracket ends bite into the joists, holding the unit securely in place.

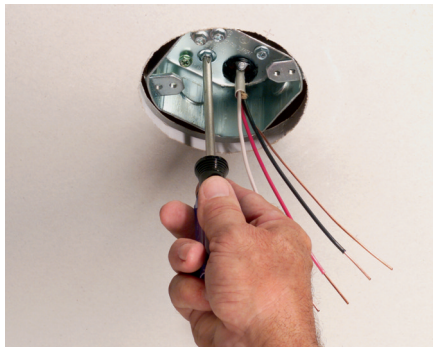

5 Position sled. Tighten screws. Pull cable through installed NM cable connector. Reattach the box to the sled. Attach the fan/fixture bracket with supplied screws.

**HIGHER  
Weight  
Ratings**

**LOAD RATINGS (LBS)**

RAFTER/JOIST CENTERLINE SPACING	FAN	FIXTURE
16"	70 LBS	150 LBS
24"	70 LBS	90 LBS



**Arlington**

1 Stauffer Industrial Park  
Scranton, PA 18517  
800/233.4717  
Fax 570/562.0646  
www.aifittings.com

Patented. Other patents pending.  
FBRS4200R 0218/15M



FBRS4200R




CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	DESCRIPTION	UNIT PKG	STD PKG
FBRS4200R	75315	Heavy-duty, plated steel fan/fixture box w/ fully adjustable bracket	1	10

Distributed by

# Fan/Fixture Box with Adjustable Bracket

**NEW!**  
Weight  
Ratings

*Now with HIGHER Weight Ratings • For Retrofit*

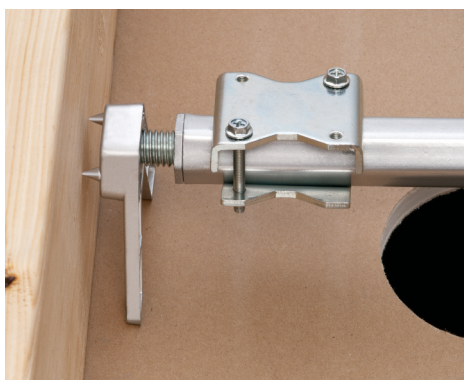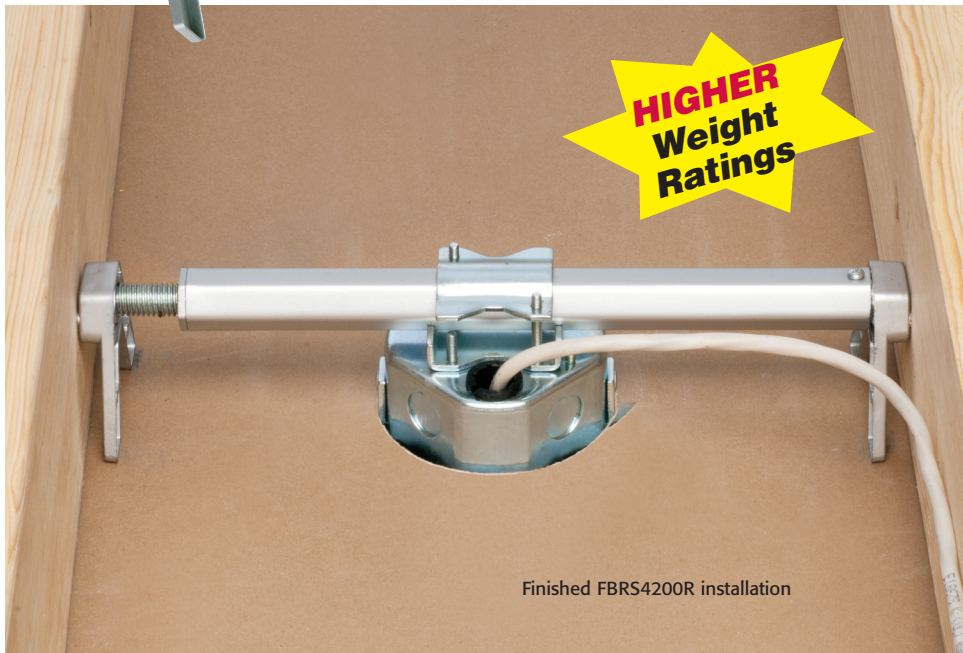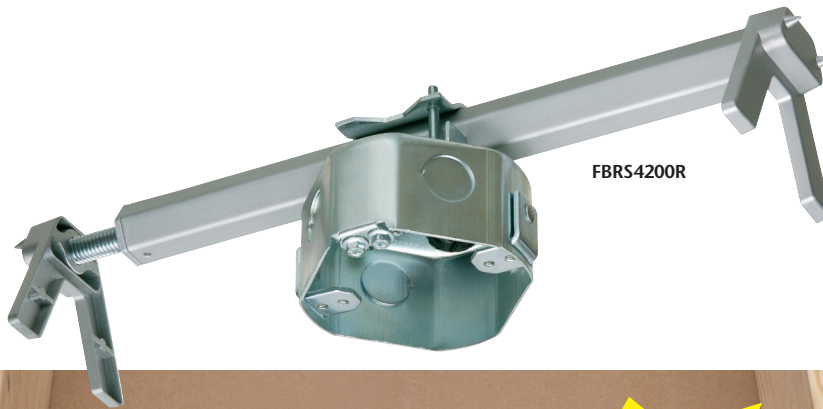

Bracket ends bite into wood



Holds a 70 lb fan

Arlington's extra heavy-duty, **plated steel fan/fixture box** now has higher UL weight ratings:

**150 lbs for fixtures • 70 lbs for fans** when installed on joists spaced 16" on center; **70 lbs for fans, 90 lbs for a fixture** on joists spaced 24" on-center. CSA rated for 50 lb fan or fixture.

Our FBR54200R features a fully adjustable bracket for installations between joists or rafters spaced from 16" to 24" on center. Bracket ends bite into the wood rafter or joist, holding the fan or fixture securely in place.

- Fast, easy installation in old work/ retrofit projects
- 20.0 cubic inch capacity, 2 inch box depth
- No parts to lose...installation screws ship captive, with an installed mud cover and NM cable connector
- UL/CSA Listed



**Arlington**

1 Stauffer Industrial Park  
Scranton, PA 18517  
800/233.4717  
Fax 570/562.0646  
[www.aifittings.com](http://www.aifittings.com)

Patented

# Fan/Fixture Box with Adjustable Bracket

*Installs between rafters spaced 16" to 24" on center*

Easy, secure fan or fixture installation in retrofit projects




1 Determine location of fan/fixture. Cut a 4-1/16" diameter hole in ceiling. Remove box (only) from the bracket. Loosen screws on sled to enable centering above hole (step 5). Insert bracket through the opening.




2 Position bracket between joists with "feet" resting on the ceiling. Embed bracket ends in joists by turning the hex bar by hand...



3 ...then tightening with a wrench.

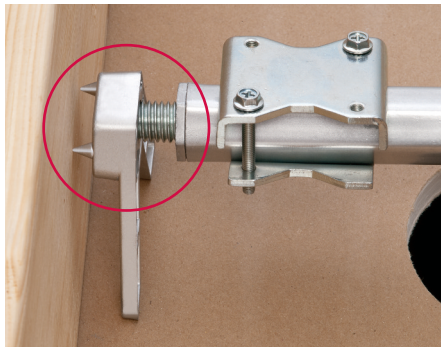

4 As the hex bar is tightened, the bracket ends bite into the joists, holding the unit securely in place.

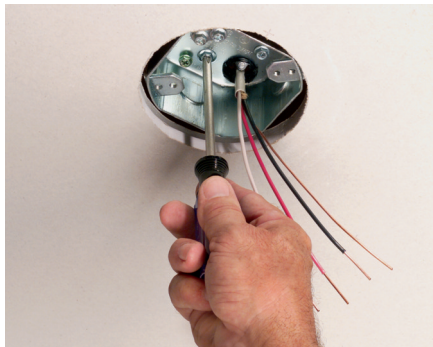

5 Position sled. Tighten screws. Pull cable through installed NM cable connector. Reattach the box to the sled. Attach the fan/fixture bracket with supplied screws.



**LOAD RATINGS (LBS)**


RAFTER/JOIST CENTERLINE SPACING	FAN	FIXTURE
16"	70 LBS	150 LBS
24"	70 LBS	90 LBS



**Arlington**

1 Stauffer Industrial Park  
Scranton, PA 18517  
800/233.4717  
Fax 570/562.0646  
www.aifittings.com

Patented. Other patents pending.  
FBRS4200R 0218/15M

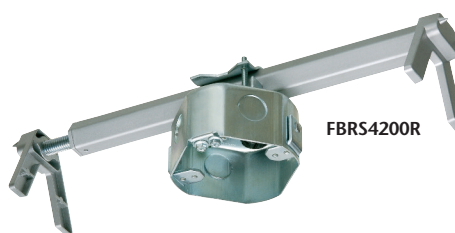

FBRS4200R

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	DESCRIPTION	UNIT PKG	STD PKG
FBRS4200R	75315	Heavy-duty, plated steel fan/fixture box w/ fully adjustable bracket	1	10

Distributed by