

Straight Blade Devices Decorator Combination GFCI Receptacles with SafeLock™ Protection

15A, 125VAC

Pass & Seymour
legrand




Features


- Meets 2003 UL requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Up-down switching.
- 15 Amp single pole switch rated for 1/2 HP motor loads — perfect for bath or kitchen vent fans.
- Trip Indicator Light (red lamp).
- Prevents line-load reversal miswire: If miswired, GFCI cannot be RESET.
- Improved resistance to surge, corrosion and electrical power line noise.
- Nightlight has durable, cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy: eliminates bulb replacement.
- Side or internal screw-pressure-plate back wire with #14 – #10 AWG solid or stranded copper wire.
- Ground screw with a wire guide channel and back wire clamp.
- Line and load terminations supplied backed out and ready-to-wire.
- High-impact resistant thermoplastic construction (switch, face and back only).
- Extra-long strap.
- Two back wire holes per terminal.
- Welding of face to back body provides sealed tamperproof construction.
- Button colors match the device face.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications


- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

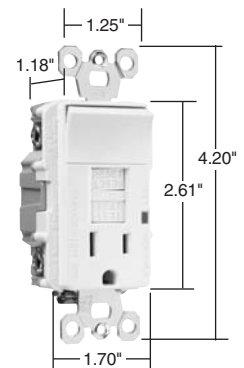

1594-SWTWCC5

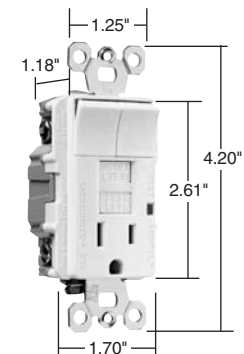

1594-2SWTWCC5

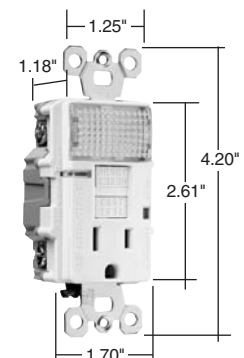

1594-NTLWCC6



NEMA
5-15R

| Catalog Number | Switch Rating A. VAC | Receptacle Rating A. VAC | Color | NEMA Config. No. | 3rd Party Compliance | | |
|--------------------------------------|-------------------------|-----------------------------|------------|------------------|------------------------|-----------------------|-----------------------|
| | | | | | UL943 C22.2 No. 144 | UL498 C22.2 No. 42 | UL20 C22.2 No. 111 |
| Single Pole Switch/GFCI | | | | | | | |
| 1594-SWTICC5 | 15 120 | 15 125 | Ivory | 5-15R | • | • | • |
| 1594-SWTWCC5 | 15 120 | 15 125 | White | 5-15R | • | • | • |
| 1594-SWTLACC5 | 15 120 | 15 125 | Lt. Almond | 5-15R | • | • | • |
| Two Single Pole Switches/GFCI | | | | | | | |
| 1594-2SWTICC5 | 15 120 | 15 125 | Ivory | 5-15R | • | • | • |
| 1594-2SWTWCC5 | 15 120 | 15 125 | White | 5-15R | • | • | • |
| 1594-2SWTLACC5 | 15 120 | 15 125 | Lt. Almond | 5-15R | • | • | • |
| Nightlight/GFCI | | | | | | | |
| 1594-NTLICC6 | 15 120 | 15 125 | Ivory | 5-15R | • | • | |
| 1594-NTLWCC6 | 15 120 | 15 125 | White | 5-15R | • | • | |
| 1594-NTLLACC6 | 15 120 | 15 125 | Lt. Almond | 5-15R | • | • | |

NEW

NEW

NEW

Straight Blade Devices

Decorator Combination GFCI Receptacles

All devices listed on this page conform to NEMA WD-1.

Straight Blade Devices Decorator Combination GFCI Receptacles with SafeLock™ Protection

15A, 125VAC

Pass & Seymour
legrand




Features


- Meets 2003 UL requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Up-down switching.
- 15 Amp single pole switch rated for 1/2 HP motor loads — perfect for bath or kitchen vent fans.
- Trip Indicator Light (red lamp).
- Prevents line-load reversal miswire: If miswired, GFCI cannot be RESET.
- Improved resistance to surge, corrosion and electrical power line noise.
- Nightlight has durable, cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy: eliminates bulb replacement.
- Side or internal screw-pressure-plate back wire with #14 – #10 AWG solid or stranded copper wire.
- Ground screw with a wire guide channel and back wire clamp.
- Line and load terminations supplied backed out and ready-to-wire.
- High-impact resistant thermoplastic construction (switch, face and back only).
- Extra-long strap.
- Two back wire holes per terminal.
- Welding of face to back body provides sealed tamperproof construction.
- Button colors match the device face.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications


- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

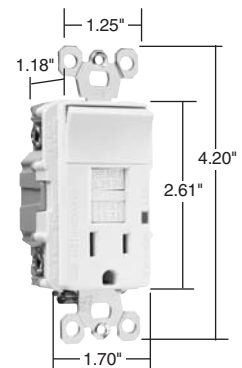

1594-SWTWCC5

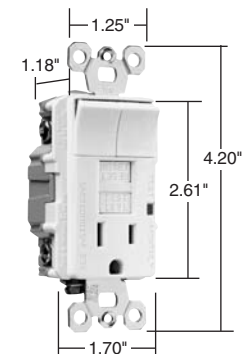

1594-2SWTWCC5

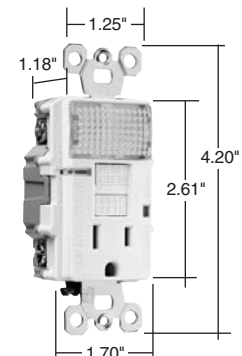

1594-NTLWCC6



NEMA
5-15R

| Catalog Number | Switch Rating A. VAC | Receptacle Rating A. VAC | Color | NEMA Config. No. | 3rd Party Compliance | | |
|--------------------------------------|-------------------------|-----------------------------|------------|------------------|------------------------|-----------------------|-----------------------|
| | | | | | UL943 C22.2 No. 144 | UL498 C22.2 No. 42 | UL20 C22.2 No. 111 |
| Single Pole Switch/GFCI | | | | | | | |
| 1594-SWTICC5 | 15 120 | 15 125 | Ivory | 5-15R | • | • | • |
| 1594-SWTWCC5 | 15 120 | 15 125 | White | 5-15R | • | • | • |
| 1594-SWTLACC5 | 15 120 | 15 125 | Lt. Almond | 5-15R | • | • | • |
| Two Single Pole Switches/GFCI | | | | | | | |
| 1594-2SWTICC5 | 15 120 | 15 125 | Ivory | 5-15R | • | • | • |
| 1594-2SWTWCC5 | 15 120 | 15 125 | White | 5-15R | • | • | • |
| 1594-2SWTLACC5 | 15 120 | 15 125 | Lt. Almond | 5-15R | • | • | • |
| Nightlight/GFCI | | | | | | | |
| 1594-NTLICC6 | 15 120 | 15 125 | Ivory | 5-15R | • | • | |
| 1594-NTLWCC6 | 15 120 | 15 125 | White | 5-15R | • | • | |
| 1594-NTLLACC6 | 15 120 | 15 125 | Lt. Almond | 5-15R | • | • | |

NEW

NEW

NEW

Straight Blade Devices

Decorator Combination GFCI Receptacles