PASS & SEYMOUR® SELF-TEST GFCI RECEPTACLES

REINVENTING SAFETY ALL AROUND

Llegrand®

designed to be better.®

LEGRAND KEEPS THE INNOVATIONS COMING

At Legrand, we've been providing real solutions to real problems for so long, it's almost second nature. From the world's first GFCI receptacle in 1972, to the introduction of ground-breaking SafeLock® Protection some 30 years later, we've been delivering GFCI innovations designed to enhance safety, add convenience and increase productivity for more than five decades.

Exceeding UL requirements, our **GFCIs self test every three seconds**—instead of the industry standard three hours—providing a level of reliable electrical protection that's unprecedented. Our devices are also designed with a thinner profile to make more room for wires in the wall box. That means they're not only safer, but easier to install as well.

In the same way that Pass & Seymour GFCI Receptacles have been reliably protecting users for 50 years, they also protect the environment as well with a commitment to RoHS-Compliance. RoHS (Restriction of Hazardous Substances) is a directive that requires manufacturers of certain types of electronic and electrical equipment to eliminate use of hazardous materials. Legrand is committed to product safety, but also to our responsibility as an industry leader.

Legrand's Self-Test GFCI Technology—conducts an automatic test EVERY THREE SECONDS, ensuring it's always ready to protect.

External back wire pressure plates with posted terminal screws for faster installation.
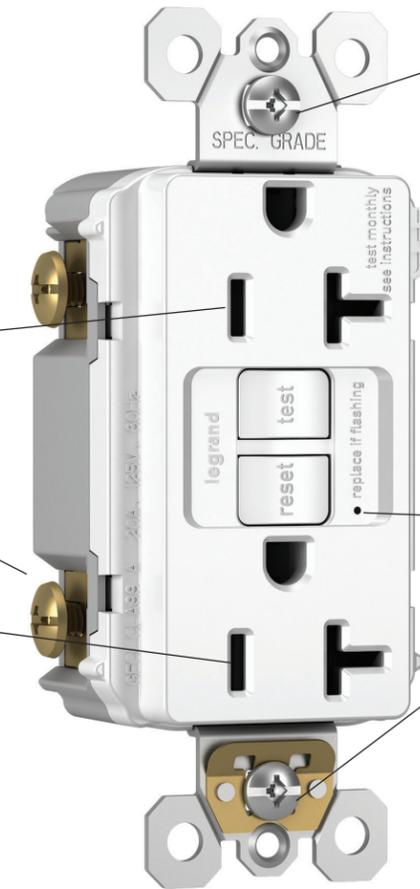
Patented SafeLock® Protection: if critical components are damaged and ground fault protection is lost, power to the receptacle is disconnected.

Enhanced tamper-resistant automatic shutter system allows for easier plug insertion while preventing young children from inserting common household objects.

Redesigned side wire cavity improves speed of side wire installation.

Black "invisi-shutters" provide tamper-resistance with an invisible effect preferred by end users.

Meets latest UL Requirements.

Captive screws make for easier installation.

Ground terminal clamp allows for fast installation.

Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.

High-impact-resistant, thermoplastic construction for superior strength and durability.

The indicator light flashes if the device fails the self-test, signaling that the GFCI should be replaced.

Auto-ground clip assures a positive ground to metal box.

RoHS

2097TRW

MORE PROTECTION.
MORE FUNCTIONALITY.

SAFETY IS OUR CODE

When we invented the first GFCI receptacle, our goal was to keep people safe. Today, because of their proven effectiveness, they are required by code in numerous locations. That's why we've made it our mission to offer intelligently designed GFCI solutions for every residential and commercial environment.

Receptacles or combination devices, spec-grade or hospital-grade, tamper-resistant, weather-resistant, audible alarm - whatever the job calls for, we've got a reliable GFCI device for you.

POWERFUL POINT-OF-USE PROTECTION

Putting GFCI protection within arm's reach means easier access for homeowners - and fewer callbacks for contractors.

SEE IT: Point-of-use GFCI receptacles are readily accessible and allow homeowners to spot problems quickly. GFCI breakers, however, are hidden in remote service panels in garages, basements or other inconvenient locations. They can be challenging to access, making it difficult to restore power quickly.

RESET IT: GFCI receptacles have a trip indicator light and test/reset easily with the push of a button. Breakers, however, can be confusing and unfamiliar to homeowners, making it difficult to determine the reason for the loss of power.

PREVENT IT: Without a GFCI device that is accessible and easy to see, trips can easily go unnoticed, leading to much bigger problems. Power loss to sump pumps, freezers or other important appliances can result in flooded basements or even more expensive property damage.

A SAFETY SOLUTION FOR EVERY HOME.

IT ALL COMES DOWN TO KEEPING PEOPLE SAFE

Our Pass & Seymour product line includes all the residential GFCI devices you'd expect from an industry leader—including designer options from our adorne® & radiant® Collections. In addition to stylish choices, you'll also find the innovative solutions you need to meet special requirements, including:

Spec-Grade
Tamper-Resistant
Audible Alarm
Combination Switch
Combination Night Light
Combination USB
Weather-Resistant

GFCI/NIGHT LIGHT COMBINATION DEVICE

Ensures safety and convenience

- Sealed night light with Lexan® lens prevents tampering
- LED illumination with a 20+ year life expectancy means no bulbs to change
- Photocell turns night light ON in the dark—OFF in the daylight
- Performs a self-test every 3 seconds
- Tamper-Resistant for added safety

1597NTLTRWCC4

MAKE NIGHTTIME NAVIGATION EASIER.

Ideal for kitchens, bathrooms, hallways, stairs, nurseries and more, this GFCI device features a built-in night light, delivering advanced safety and protection.

TAMPER-RESISTANT GFCI

Helps keep children safe

- Patented shutter system with black "invisi-shutters" that disappear for an invisible effect while helping prevent insertion of foreign objects
- Patented SafeLock® Protection—if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected
- Meets NEC® requirements
- Performs a self-test every 3 seconds

1597TRNICC4

GFCI USB COMBINATION DEVICE

Adds charging anywhere, easily

- Combines GFCI protection and built-in charging in a single device
- Meets NEC® requirements
- USB ports for increased user convenience
- Tamper-Resistant for added safety
- Performs a self-test every 3 seconds

1597TRUSBACW

AUDIBLE ALARM GFCI

Offers protection you can see and hear

- Provides an audible alert of a tripped condition and that power to a receptacle is interrupted
- Ideal for basement sump pumps and other areas where a GFCI indicator light might not be readily apparent
- Meets NEC® requirements
- Tamper-Resistant for added safety
- Performs a self-test every 3 seconds

1597TRAW

GFCI/SWITCH COMBINATION DEVICE

Ideal for remodeling

- User-preferred up-and-down switching combined with standard GFCI safety features
- Provides more functionality in single-gang opening
- Tamper-Resistant for added safety
- Ideal for bath and kitchen vent fans
- Performs a self-test every 3 seconds

1597SWTTRWCC4

INNOVATIONS THAT TRANSLATE INTO FASTER COMMERCIAL INSTALLATIONS

SPEED AND RELIABILITY ARE THE KEY TO SUCCESSFUL COMMERCIAL INSTALLATIONS.

Our GFCI receptacles are designed to meet those needs…and then some. That's because we've been offering GFCI receptacles longer than anyone else, so we know what you need to do the job right the first time. Take a look at our innovative line—we think you'll find a solution that perfectly matches your needs. Every time.

Spec-Grade	PlugTail®
Hospital-Grade	Audible Alarm
Tamper-Resistant	Isolated Ground
Weather-Resistant	Combinations
USMCA Compliant	Dead Front

PlugTail's patented plug and connector design enables simultaneous, one-click terminations.

PLUGTAIL® GFCI

The fastest-installing GFCI ever. Hands down.

- Beats tough deadlines on any commercial job
- No exposed terminals creates a finger-safe application before, during, and after installation
- Available in Spec Grade, Hospital Grade, Tamper-Resistant, and LED/Night Light combinations
- Performs a self-test every 3 seconds
- Enables fast, affordable upgrades as space evolves

PT2097TRW

HOSPITAL GRADE GFCI

- Meets rigorous requirements of Hospital Grade supplement of UL 498
- Available in Tamper-Resistant and LED/Night Light combinations
- Performs a self-test every 3 seconds

PT2097HGTRW

DUAL-CONTROLLED GFCI

- Permanent controlled receptacle markings using abrasion resistant ink
- Controlled receptacle marking is NEMA-approved and compliant with 2023 NEC, CA Title 24, Part 6: Building Energy Efficiency Standards, ASHRAE 90.1 Energy Efficiency Standard 90.1, and the 2021 International Energy Conservation Code (IECC)

2097TRCDLA

SPECIFICATION GRADE GFCI

- 20 amp designed for heavy-duty commercial use
- High-impact-resistant, thermoplastic construction for superior strength and durability
- The most durable GFCI available. Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles
- Performs a self-test every 3 seconds

2097TRW

USMCA COMPLIANT GFCIS

Designed to meet government regulations

- North American GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act
- Provides the same functionality and protection as our traditional GFCI
- Performs a self-test every 3 seconds

PORTABLE GFCIS

Ideal for remodeling

- Rugged polycarbonate housing stands up to impacts and hard use
- Water-resistant design for wet and corrosive indoor/outdoor environments
- Automatic reset ensures continuous power for pumps, portable signs, lights and engine heaters
- Watertight rubber cord grommets seal the GFCI from the environment

1597PC2M

Residential Self-Test GFCI Receptacles

CATALOG NO.	DESCRIPTION	RATINGS A.	RATINGS V.	COLORS	NEMA Config.
1597TR*	radiant® Spec Grade Tamper-Resistant 15 Amp Duplex GFCI	15	125	I, W, —, BK, LA, NI, DB, G	5-15R
1597*	radiant® Spec Grade 15 Amp Duplex GFCI	15	125	I, W, —, GRY, BK, RED, LA	5-15R
1597TRA*	radiant® Audible Alarm Tamper-Resistant Duplex GFCI	15	125	I, W, —, LA	5-15R
1597SWTTR*CC4	radiant® Combination Tamper-Resistant Single-Pole Switch/GFCI	15	125	I, W, BK, LA, GRY	5-15R
1597NTLTR*CC4	radiant® Combination Tamper-Resistant 15 Amp Night Light/GFCI	15	125	I, W, BK, LA, NI, DB	5-15R
1597TRWR*	radiant® Spec Grade Tamper-Resistant, Weather-Resistant 15 Amp Duplex GFCI	15	125	I, W, —, GRY, BK, LA	5-15R
1597TRSGL*	radiant® Tamper-Resistant Self-Test Simplex GFCI	15	125	I, RED, BK, LA, GRY, —, W	5-15R
1597TRUSBAA*	radiant® GFCI USB Outlet	15	125	I, W, BK, LA, NI, DB, G, GRY	5-15R
1597TRUSBAC*	radiant® GFCI USB Type-A/C Outlet	15	125	I, W, -, BK, LA, NI, DB, G, GRY	5-15R
1597TRUSBCC*	radiant® GFCI USB Type-C/C Outlet	15	125	I, W, LA	5-15R
AGFTR2152*4	adorne® 15A Tamper-Resistant Self-Test GFCI Outlet	15	125	W, G, M	5-15R
AGFTR2153*4	adorne® 15A TR Self-Test GFCI Outlet, Plus-Size	15	125	W, G, M	5-15R
AGFTR2202*4	adorne® 20A Tamper-Resistant Self-Test GFCI Outlet	20	125	W, G, M	5-20R

Third-Party Compliance: cULus Listed, File Number E42190, Standard UL498 & UL943, Federal Specification WC596

Commercial Self-Test GFCI Receptacles

CATALOG NO.	DESCRIPTION	RATINGS A.	RATINGS V.	COLORS	NEMA Config.
2097TR*	radiant® Spec Grade Tamper-Resistant 20 Amp Duplex GFCI	20	125	I, W, —, GRY, BK, RED, LA, DB, G, NI	5-20R
2097*	radiant® Spec Grade 20 Amp Duplex GFCI	20	125	I, W, —, GRY, BK, RED, LA	5-20R
1597HGTR*	Hospital Grade Tamper-Resistant Duplex GFCI	15	125	I, W, —, GRY, BK, RED, LA	5-15R
2097HGTR*	Hospital Grade Tamper-Resistant Duplex GFCI	20	125		5-20R
1597HG*	Hospital Grade Duplex GFCI	15	125	I, W, GRY, BK, RED, LA	5-15R
2097HG*	Hospital Grade Duplex GFCI	20	125	I, W, —, GRY, BK, RED, LA	5-20R
1597IGTR*	Spec Grade Isolated Ground Tamper-Resistant Duplex GFCI	15	125	I, W, O	5-15R
2097IGTR*	Spec Grade Isolated Ground Tamper-Resistant Duplex GFCI	20	125	I, W, GRY, LA, O	5-20R
1597IGHGTR*	Hospital Grade Isolated Ground Tamper-Resistant Duplex GFCI	15	125	O	5-15R
2097IGHGTR*	Hospital Grade Isolated Ground Tamper-Resistant Duplex GFCI	20	125	I, W, RED, LA, O	5-20R
2097NTLTR*	radiant® Combination Tamper-Resistant 20 Amp Night Light/GFCI	20	125	I, W, GRY, LA, BK	5-20R
2097HGNTLTR*	Hospital Grade Combination Tamper-Resistant Night Light/GFCI	20	125	W	5-20R
2097TRWR*	radiant® Spec Grade Tamper-Resistant, Weather-Resistant 20 Amp Duplex GFCI	20	125	I, W, —, GRY, BK, LA	5-20R
2097TRCD*	radiant® Spec Grade Tamper-Resistant Dual Controlled 20 Amp Duplex GFCI	20	125	I, W, —, GRY, BK, RED, LA, BL, GN	5-20R

Third-Party Compliance: cULus Listed, File Number E42190, Standard UL498 & UL943, Federal Specification WC596

*COLOR DESIGNATION

I	Ivory
W	White
GRY	Gray
G	Graphite
BK	Black
RED	Red
LA	Light Almond
NI	Nickel
—	Brown
DB	Dark Bronze
O	Orange
M	Magnesium

Commercial Self-Test GFCI Receptacles

CATALOG NO.	DESCRIPTION	RATINGS A.	RATINGS V.	COLORS	NEMA Config.
2097TRA*	radiant® Spec Grade Audible Alarm Tamper-Resistant 20 Amp Duplex GFCI	20	125	I, W, — LA	5-20R
1597HGTRA*	Hospital Grade Audible Alarm Tamper-Resistant Duplex GFCI	15	125	—	5-15R
2097HGTRA*	Hospital Grade Audible Alarm Tamper-Resistant Duplex GFCI	20	125	I, W, RED, LA	5-20R
2097TRSGL*	radiant® 20A Tamper-Resistant Self-Test Simplex GFCI	20	125	I, RED, BK, LA, GRY, W, —	5-20R

Third-Party Compliance: cULus Listed, File Number E42190, Standard UL498 & UL943, Federal Specification WC596

Dead Front Self-Test GFCI Receptacles

CATALOG NO.	DESCRIPTION	RATINGS A.	RATINGS V.	COLORS	NEMA Config.
2087	radiant® Spec Grade Dead Front GFCI 1-1/2 HP Motor Control Rating	20	125	I, W, BK, LA	5-20R

Third-Party Compliance: cULus Listed, File Number E42190, Standard UL498 & UL943

PlugTail® Self-Test GFCI Receptacles

CATALOG NO.	DESCRIPTION	RATINGS A.	RATINGS V.	COLORS	NEMA Config.
PT1597*	Spec Grade Duplex GFCI	15	125	I, W, GRY, LA	5-15R
PT2097*	Spec Grade Duplex GFCI	20	125	I, W, —, GRY, BK, RED, LA	5-20R
PT1597TR*	Spec Grade Tamper-Resistant Duplex GFCI	15	125	I, W, GRY, BK, RED, LA	5-15R
PT2097TR*	Spec Grade Tamper-Resistant Duplex GFCI	20	125	I, W, —, GRY, BK, RED, LA	5-20R
PT1597HG*	Hospital Grade Duplex GFCI	15	125	W, RED, LA, GRY	5-15R
PT2097HG*	Hospital Grade Duplex GFCI	20	125	I, W, —, GRY, BK, RED, LA	5-20R
PT1597HGTR*	Hospital Grade Tamper-Resistant Duplex GFCI	15	125	I, W, RED, LA	5-15R
PT2097HGTR*	Hospital Grade Tamper-Resistant Duplex GFCI	20	125	I, W, GRY, BK, RED, LA, BL	5-20R
PT2097NTLTR*	Spec Grade Tamper-Resistant Combination Night Light/GFCI	20	125	I, W, BK	5-20R
PT1597HGNTLTR*	Hospital Grade Tamper-Resistant Combination Night Light/GFCI	15	125	I, RED	5-15R
PT2097HGNTLTR*	Hospital Grade Tamper-Resistant Combination Night Light/GFCI	20	125	I, W, GRY, LA	5-20R

Third-Party Compliance: cULus Listed, File Number E42190, Standard UL498 & UL943, Federal Specification WC596

*COLOR DESIGNATION

I	Ivory
W	White
GRY	Gray
G	Graphite
BK	Black
RED	Red
LA	Light Almond
NI	Nickel
—	Brown
DB	Dark Bronze
BL	Blue

NEMA 5-15R   NEMA 5-20R

USMCA Compliant Self-Test GFCI Receptacles

CATALOG NO.	DESCRIPTION	RATINGS		COLORS	NEMA Config.
		A.	V.		
1597TRNA*	USMCA Compliant radiant® Spec Grade Tamper-Resistant Duplex GFCI	15	125	I, W, GRY, LA	5-15R
2097TRNA*		20	125	I, W, —, GRY, LA	5-20R
2097NA*	USMCA Compliant radiant® Spec Grade 20 Amp Duplex GFCI	20	125	I, W, —, GRY, LA, BL	5-20R
2097HGTRNA*	USMCA Compliant Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI	20	125	I, W, RED, LA	5-20R
2097HGNA*	USMCA Compliant Hospital Grade 20 Amp Duplex GFCI	20	125	I, W, —, GRY, RED, LA	5-20R
1597TRWRNA*	USMCA Compliant radiant® Tamper-Resistant Weather-Resistant Duplex GFCI	15	125	I, W, —, LA,	5-15R
2097TRWRNA*		20	125	I, W, GRY, LA, BK	5-20R

Third-Party Compliance: cULus Listed, File Number E42190, Standard UL498 & UL943, Federal Specification WC596

USMCA Compliant PlugTail® Self-Test GFCI Receptacles

CATALOG NO.	DESCRIPTION	RATINGS		COLORS	NEMA Config.
		A.	V.		
PT1597NA*	USMCA Compliant Spec Grade Duplex GFCI	15	125	W, GRY, LA	5-15R
PT2097NA*		20	125	W, BK, LA	5-20R
PT2097TRNA*	USMCA Compliant Spec Grade Tamper-Resistant 20 Amp Duplex GFCI	20	125	I, W, LA, GRY	5-20R
PT2097HGNA*	USMCA Compliant Hospital Grade 20 Amp Duplex GFCI	20	125	I, W, —, GRY, RED, LA	5-20R
PT2097HGTRNA*	USMCA Compliant Hospital Grade Tamper-Resistant 20 Amp Duplex GFCI	20	125	I, W, GRY, RED, LA	5-20R
PT1597NTLTRNA*	USMCA Compliant Spec Grade Tamper-Resistant Combination Night Light/Duplex GFCI	15	125	I, W	5-15R
PT2097NTLTRNA*		20	125	I, W	5-20R
PT2097HGNTLTRNA*	USMCA Compliant Hospital Grade Tamper-Resistant Combination Night Light/Duplex GFCI	20	125	I, W	5-20R

Third-Party Compliance: cULus Listed, File Number E42190, Standard UL498 & UL943, Federal Specification WC596

Dual-Function AFCI/GFCI Devices

CATALOG NO.	DESCRIPTION	RATINGS		COLORS	NEMA Config.
		A.	V.		
AFGF152TR*	Tamper-Resistant Dual-Function AFCI/GFCI Receptacles	15	125	W, I, -, BK, LA, GRY	5-15R
AFGF202TR*		20	125	W, I, -, BK, LA, GRY	5-20R
AFGF202DF*	Dead Front Dual-Function AFCI/GFCI Receptacles	20	125	I, W, LA	5-20R
AFGF202HGTR*	Hospital-Grade Dual-Function AFCI/GFCI Receptacles	20	125	I, -, BK, LA, GRY, RED	5-20R

Third-Party Compliance: cULus Listed, File Number E42190, Standard UL498 & UL943, Federal Specification WC596

*COLOR DESIGNATION

I	Ivory
W	White
GRY	Gray
G	Graphite
BK	Black
RED	Red
LA	Light Almond
NI	Nickel
—	Brown
DB	Dark Bronze
BL	Blue

For additional technical or application-specific information, call 800-223-4185 or visit our website at www.legrand.us/PassandSeymour. We're eager to put our expertise to work for you.

designed to be better.

Ł legrand®

Electrical Wiring Systems
60 Woodlawn Street
West Hartford, CT 06110
1.877.BY.LEGRAND (295.3472)
www.legrand.us

FOLLOW US