

Closes off end runs of 5400 Series Raceway. Has four 1/2" trade size KOs for end feed.

Features & Benefits

Closes off end runs of 5400 Series Raceway. Has four 1/2" trade size KOs for end feed.

Specifications

General Info

Product Line	Wiremold	Color	White
UPC Number	786776519167	Country Of Origin	United States
Material	Plastic	Product Series	5400 Series
Installation Location	On Wall	Application Sector	Commercial
Standard	cULus Listed Raceway: File E90378 Guide RJTX. Complies with flammability requirements of UL-5A. Fittings: File E90377 Guide RJYT. Meets Article 388 of NEC. UL Listed for up to 600V. Meets Section 12-1600 of CEC.	Warranty Type	1-Year from Installation or 2-Years from Day of Sale
Type	Fitting		

Dimensions

Product Width US	5.5 in	Product Weight US	0.114 lb
Product Height US	1.8 in	Product Length US	1.4 in

Listing Agencies / 3rd Party Agencies

cULus ListingNumber E90377

cULus Listed

Yes

Trade Programs

USMCA Yes

Additional Information

RoHS Compliant Yes


Technical Information

Is Pre-Wired No

Indoor/Outdoor

Indoor

Voltage 600.0 V

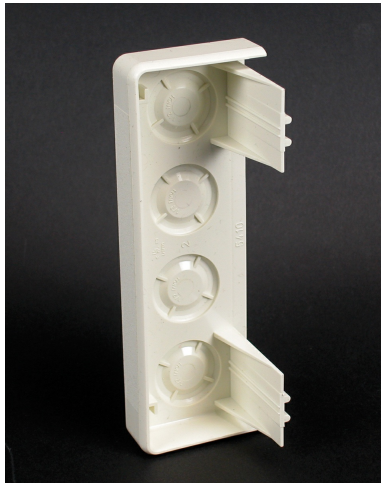

Closes off end runs of 5400 Series Raceway. Has four 1/2" trade size KOs for end feed.

Features & Benefits

Closes off end runs of 5400 Series Raceway. Has four 1/2" trade size KOs for end feed.

Specifications

General Info

Product Line	Wiremold	Color	White
UPC Number	786776519167	Country Of Origin	United States
Material	Plastic	Product Series	5400 Series
Installation Location	On Wall	Application Sector	Commercial
Standard	cULus Listed Raceway: File E90378 Guide RJTX. Complies with flammability requirements of UL-5A. Fittings: File E90377 Guide RJYT. Meets Article 388 of NEC. UL Listed for up to 600V. Meets Section 12-1600 of CEC.	Warranty Type	1-Year from Installation or 2-Years from Day of Sale
Type	Fitting		

Dimensions

Product Width US	5.5 in	Product Weight US	0.114 lb
Product Height US	1.8 in	Product Length US	1.4 in

Listing Agencies / 3rd Party Agencies

cULus ListingNumber E90377

cULus Listed

Yes

Trade Programs

USMCA Yes

Additional Information

RoHS Compliant Yes

Technical Information

Is Pre-Wired No

Indoor/Outdoor

Indoor

Voltage 600.0 V
