

FEATURES & SPECIFICATIONS

INTENDED USE — The EPANL Series LED Edge-Lit Flat Panel provides a fully luminous appearance across the face of the lens. This provides a soft, glare-free solution that is visually comfortable within the space. Suitable for many lighting applications including schools, offices and other commercial spaces, retail, convenience stores, hospitals and healthcare facilities. **Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate.** [Click here for Acrylic-Polycarbonate Compatibility table for suitable uses.](#)

CONSTRUCTION — Built to last with an aluminum frame for strength and durability, the seamless frame prevents light leak in the corners. The satin white lens provides excellent shielding and fully luminous appearance. EPANL's low-profile design provides increased installation flexibility especially in restricted plenum spaces. The back plate includes integral T-bar clips for installation into 15/16" T-grid ceilings. Clips for 9/16" T grid installation are available. See Accessories section on bottom of page. This must be ordered as a separate item. Fixture may be mounted and wired in continuous rows.

ELECTRICAL — Long-life LEDs, coupled with a high-efficiency driver, provide superior illumination for extended service life. 70% LED lumen maintenance at 60,000 hours (L70/60,000). 0-10V dimming driver, dims to 10%.

LISTINGS — CSA certified to meet US and Canadian standards. DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified. Intended for indoor use only. Damp location listed. IC rated. IP5X rated.




WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

| |
|----------------|
| Catalog Number |
| Notes |
| Type |

EPANL LED

1' x 4', 2' x 2' and 2' x 4'

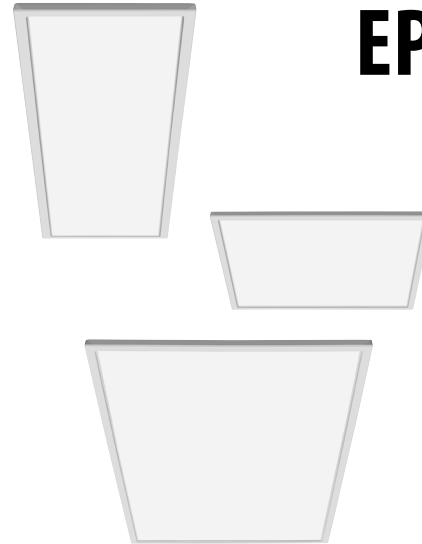

ORDERING INFORMATION

| Catalog Number | UPC | Description | Lumens | Color Temperature | CRI | Voltage | Wattage | Efficacy | Pallet Qty. | Standard Carton Qty. |
|--------------------|--------------|----------------|--------|-------------------|-----|----------|---------|----------|-------------|----------------------|
| EPANL 14 40L 35K | 190887602739 | 1x4 Flat Panel | 3905 | 3500K | >80 | 120-277V | 38.6W | 101 | 26 | 1 |
| EPANL 14 40LHE 35K | 190887602746 | 1x4 Flat Panel | 3922 | 3500K | >80 | 120-277V | 30.6W | 128 | 26 | 1 |
| EPANL 14 40L 40K | 190887602753 | 1x4 Flat Panel | 4397 | 4000K | >80 | 120-277V | 38.5W | 114 | 26 | 1 |
| EPANL 14 40LHE 40K | 190887602760 | 1x4 Flat Panel | 3857 | 4000K | >80 | 120-277V | 30.2W | 128 | 26 | 1 |
| EPANL 14 40L 50K | 191723811605 | 1X4 Flat Panel | 4225 | 5000k | >80 | 120-277V | 39W | 113 | 26 | 1 |
| EPANL 22 34L 35K | 190887602647 | 2x2 Flat Panel | 3285 | 3500K | >80 | 120-277V | 31.3W | 105 | 52 | 1 |
| EPANL 22 34LHE 35K | 190887602661 | 2x2 Flat Panel | 3357 | 3500K | >80 | 120-277V | 26.0W | 129 | 52 | 1 |
| EPANL 22 34L 40K | 190887602678 | 2x2 Flat Panel | 3479 | 4000K | >80 | 120-277V | 30.8W | 113 | 52 | 1 |
| EPANL 22 34LHE 40K | 190887602685 | 2x2 Flat Panel | 3361 | 4000K | >80 | 120-277V | 25.9W | 130 | 52 | 1 |
| EPANL 22 34L 50K | 191723811650 | 2x2 Flat Panel | 3385 | 5000k | >80 | 120-277V | 31W | 109 | 52 | 1 |
| EPANL 24 40L 35K | 190887602692 | 2x4 Flat Panel | 4039 | 3500K | >80 | 120-277V | 38.8W | 104 | 26 | 1 |
| EPANL 24 40LHE 35K | 190887602708 | 2x4 Flat Panel | 3953 | 3500K | >80 | 120-277V | 30.3W | 130 | 26 | 1 |
| EPANL 24 40L 40K | 190887602715 | 2x4 Flat Panel | 4351 | 4000K | >80 | 120-277V | 38.9W | 112 | 26 | 1 |
| EPANL 24 40LHE 40K | 190887602722 | 2x4 Flat Panel | 4013 | 4000K | >80 | 120-277V | 30.7W | 131 | 26 | 1 |
| EPANL 24 40L 50K | 191723812312 | 2X4 Flat Panel | 4108 | 5000k | >80 | 120-277V | 39W | 113 | 26 | 1 |

[Configurable Specification Sheets](#)

Notes:

1. Please refer to Emergency Battery Estimated Lumen section for lumen estimation.

ACCESSORIES

Accessories: Order as separate catalog number.

| | |
|-----------------------------------|---|
| DGA14 | Drywall grid adapter for 1x4 recessed fixture. |
| DGA22 | Drywall grid adapter for 2x2 recessed fixture. |
| DGA24 | Drywall grid adapter for 2x4 recessed fixture. |
| PS1055CP FMC BRKT | Power Sentry emergency constant power battery pack field installation kit for (T20 CEC Compliant). ¹ |
| 2X2SMKSH | 2'x2' Surface Mount Troffer Kit. See Mounting Data on page 5. |
| 2X4SMKSH | 2'x4' Surface Mount Troffer Kit. See Mounting Data on page 5. |
| 1X4SMKSH | 1'x4' Surface Mount Troffer Kit. See Mounting Data on page 5. |
| EPANL TGRID CLIP J4 | Pack of 4 grid clips for 9/16" T grid compatibility. |
| EPANL TGRID CLIP J50 | Pack of 50 grid clips for 9/16" T grid compatibility. |

Emergency Battery Estimated Lumens

Use the formula below to estimate the delivered lumens in emergency mode

Estimated Lumens = 1.25 x P x LPW

P = Output power of emergency driver (10W for PS1050DL)

LPW = Lumen per watt rating of the luminaire.

EPANL compatible with Sensor Switch™
[WSX-D](#) and [SPOD](#) wall switches.




WSX-D




SPOD

PHOTOMETRICS


EPANL 14 40L 40K, 4397 delivered lumens

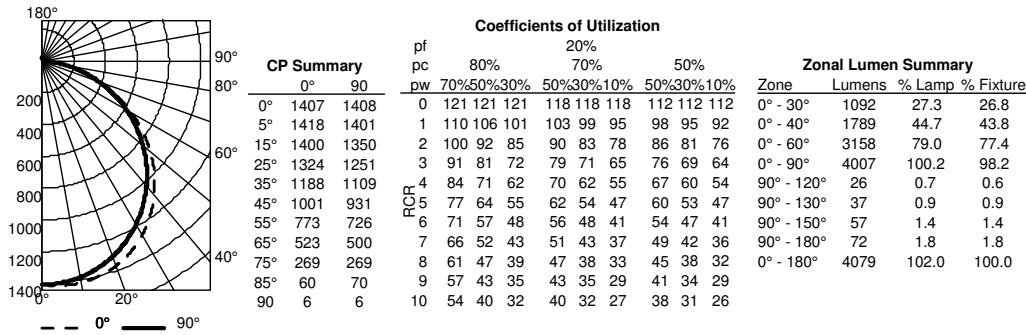







EPANL 22 34L 40K, 3479 delivered lumens

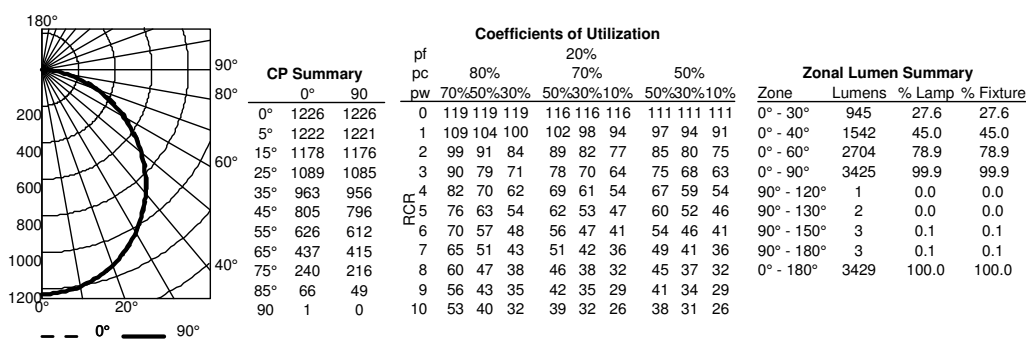




EPANL 24 40L 40K, 4351 delivered lumens

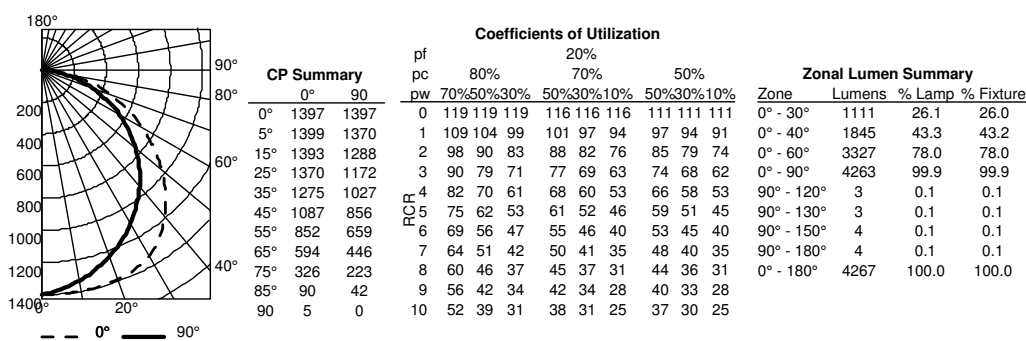

DIMENSIONS

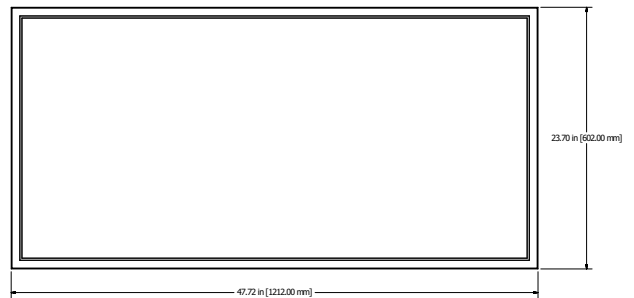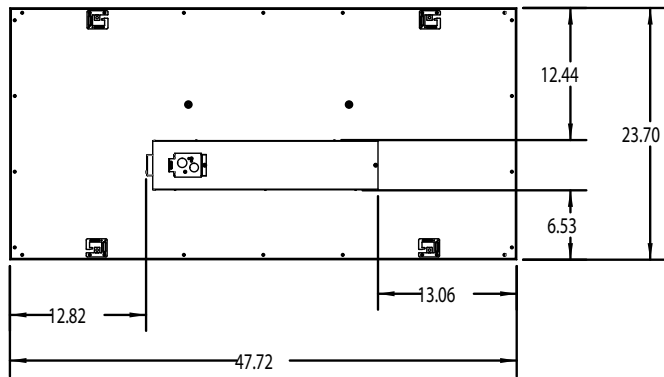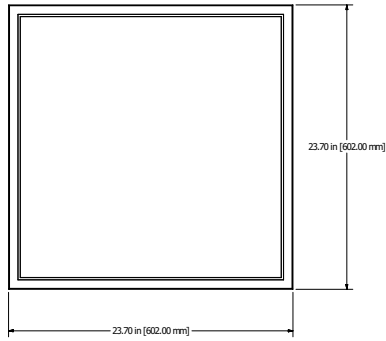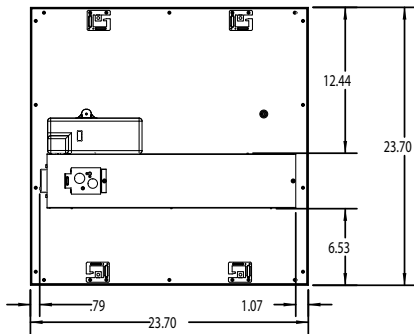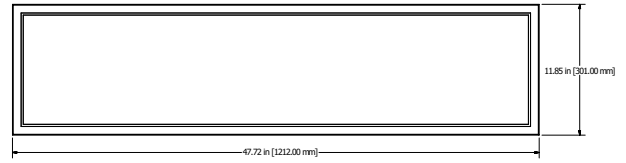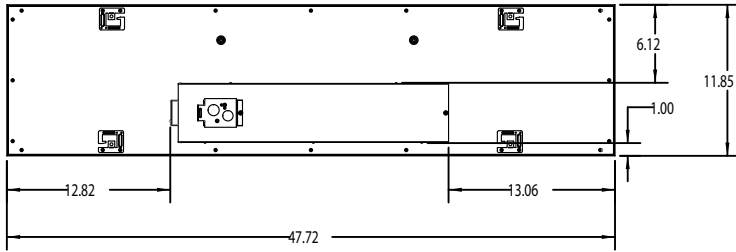

1X4SMKSH, 2X2SMKSH, 2X4SMKSH
SURFACE MOUNT KIT - MOUNTING DATA

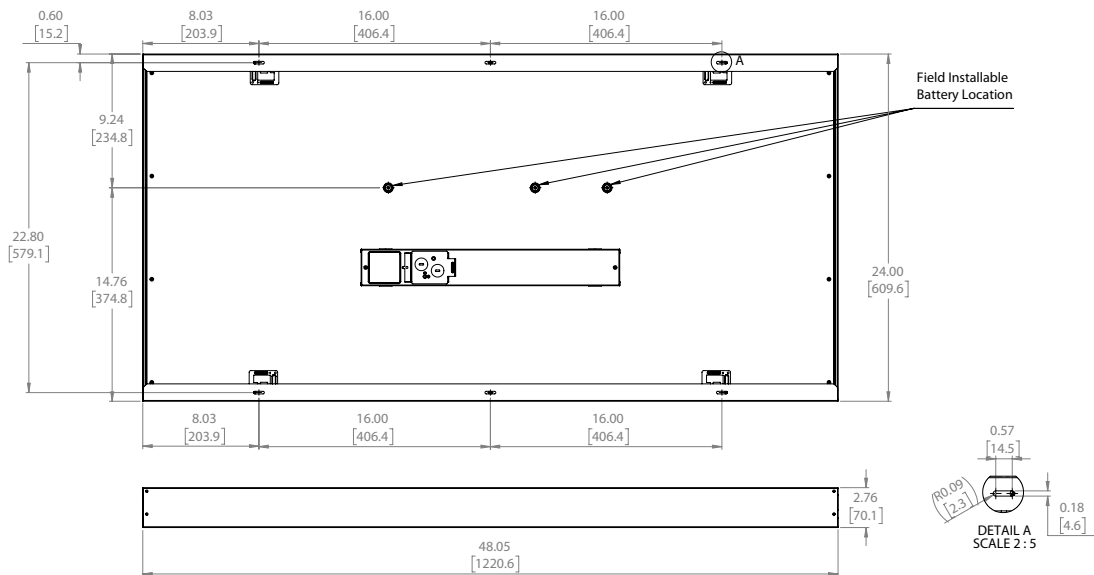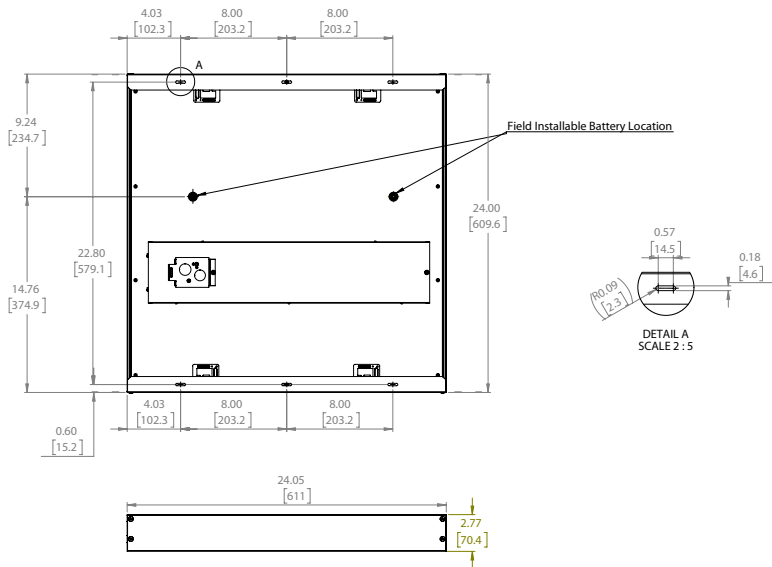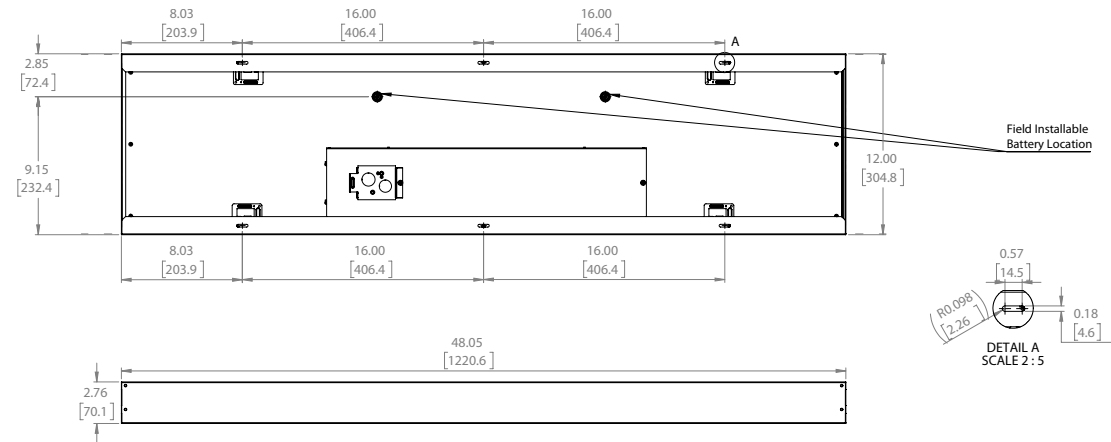

FEATURES & SPECIFICATIONS

INTENDED USE — The EPANL Series LED Edge-Lit Flat Panel provides a fully luminous appearance across the face of the lens. This provides a soft, glare-free solution that is visually comfortable within the space. Suitable for many lighting applications including schools, offices and other commercial spaces, retail, convenience stores, hospitals and healthcare facilities. **Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate.** [Click here for Acrylic-Polycarbonate Compatibility table for suitable uses.](#)

CONSTRUCTION — Built to last with an aluminum frame for strength and durability, the seamless frame prevents light leak in the corners. The satin white lens provides excellent shielding and fully luminous appearance. EPANL's low-profile design provides increased installation flexibility especially in restricted plenum spaces. The back plate includes integral T-bar clips for installation into 15/16" T-grid ceilings. Clips for 9/16" T grid installation are available. See Accessories section on bottom of page. This must be ordered as a separate item. Fixture may be mounted and wired in continuous rows.

ELECTRICAL — Long-life LEDs, coupled with a high-efficiency driver, provide superior illumination for extended service life. 70% LED lumen maintenance at 60,000 hours (L70/60,000). 0-10V dimming driver, dims to 10%.

LISTINGS — CSA certified to meet US and Canadian standards. DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified. Intended for indoor use only. Damp location listed. IC rated. IP5X rated.




WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

| |
|----------------|
| Catalog Number |
| Notes |
| Type |

EPANL LED

1' x 4', 2' x 2' and 2' x 4'

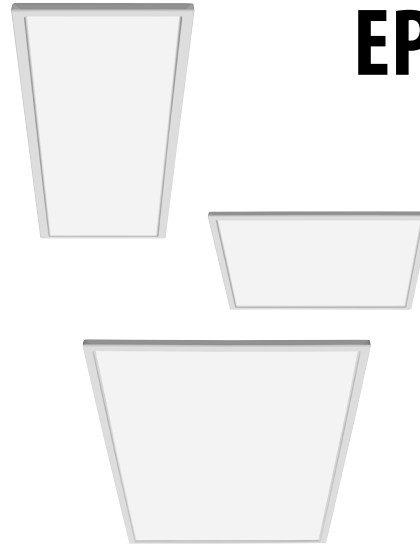

ORDERING INFORMATION

| Catalog Number | UPC | Description | Lumens | Color Temperature | CRI | Voltage | Wattage | Efficacy | Pallet Qty. | Standard Carton Qty. |
|--------------------|--------------|----------------|--------|-------------------|-----|----------|---------|----------|-------------|----------------------|
| EPANL 14 40L 35K | 190887602739 | 1x4 Flat Panel | 3905 | 3500K | >80 | 120-277V | 38.6W | 101 | 26 | 1 |
| EPANL 14 40LHE 35K | 190887602746 | 1x4 Flat Panel | 3922 | 3500K | >80 | 120-277V | 30.6W | 128 | 26 | 1 |
| EPANL 14 40L 40K | 190887602753 | 1x4 Flat Panel | 4397 | 4000K | >80 | 120-277V | 38.5W | 114 | 26 | 1 |
| EPANL 14 40LHE 40K | 190887602760 | 1x4 Flat Panel | 3857 | 4000K | >80 | 120-277V | 30.2W | 128 | 26 | 1 |
| EPANL 14 40L 50K | 191723811605 | 1X4 Flat Panel | 4225 | 5000k | >80 | 120-277V | 39W | 113 | 26 | 1 |
| EPANL 22 34L 35K | 190887602647 | 2x2 Flat Panel | 3285 | 3500K | >80 | 120-277V | 31.3W | 105 | 52 | 1 |
| EPANL 22 34LHE 35K | 190887602661 | 2x2 Flat Panel | 3357 | 3500K | >80 | 120-277V | 26.0W | 129 | 52 | 1 |
| EPANL 22 34L 40K | 190887602678 | 2x2 Flat Panel | 3479 | 4000K | >80 | 120-277V | 30.8W | 113 | 52 | 1 |
| EPANL 22 34LHE 40K | 190887602685 | 2x2 Flat Panel | 3361 | 4000K | >80 | 120-277V | 25.9W | 130 | 52 | 1 |
| EPANL 22 34L 50K | 191723811650 | 2x2 Flat Panel | 3385 | 5000k | >80 | 120-277V | 31W | 109 | 52 | 1 |
| EPANL 24 40L 35K | 190887602692 | 2x4 Flat Panel | 4039 | 3500K | >80 | 120-277V | 38.8W | 104 | 26 | 1 |
| EPANL 24 40LHE 35K | 190887602708 | 2x4 Flat Panel | 3953 | 3500K | >80 | 120-277V | 30.3W | 130 | 26 | 1 |
| EPANL 24 40L 40K | 190887602715 | 2x4 Flat Panel | 4351 | 4000K | >80 | 120-277V | 38.9W | 112 | 26 | 1 |
| EPANL 24 40LHE 40K | 190887602722 | 2x4 Flat Panel | 4013 | 4000K | >80 | 120-277V | 30.7W | 131 | 26 | 1 |
| EPANL 24 40L 50K | 191723812312 | 2X4 Flat Panel | 4108 | 5000k | >80 | 120-277V | 39W | 113 | 26 | 1 |

[Configurable Specification Sheets](#)

Notes:

1. Please refer to Emergency Battery Estimated Lumen section for lumen estimation.

ACCESSORIES

Accessories: Order as separate catalog number.

| | |
|-----------------------------------|---|
| DGA14 | Drywall grid adapter for 1x4 recessed fixture. |
| DGA22 | Drywall grid adapter for 2x2 recessed fixture. |
| DGA24 | Drywall grid adapter for 2x4 recessed fixture. |
| PS1055CP FMC BRKT | Power Sentry emergency constant power battery pack field installation kit for (T20 CEC Compliant). ¹ |
| 2X2SMKSH | 2'x2' Surface Mount Troffer Kit. See Mounting Data on page 5. |
| 2X4SMKSH | 2'x4' Surface Mount Troffer Kit. See Mounting Data on page 5. |
| 1X4SMKSH | 1'x4' Surface Mount Troffer Kit. See Mounting Data on page 5. |
| EPANL TGRID CLIP J4 | Pack of 4 grid clips for 9/16" T grid compatibility. |
| EPANL TGRID CLIP J50 | Pack of 50 grid clips for 9/16" T grid compatibility. |

Emergency Battery Estimated Lumens

Use the formula below to estimate the delivered lumens in emergency mode

Estimated Lumens = 1.25 x P x LPW

P = Output power of emergency driver (10W for PS1050DL)

LPW = Lumen per watt rating of the luminaire.

EPANL compatible with Sensor Switch™
[WSX-D](#) and [SPOD](#) wall switches.




WSX-D




SPOD

PHOTOMETRICS


EPANL 14 40L 40K, 4397 delivered lumens

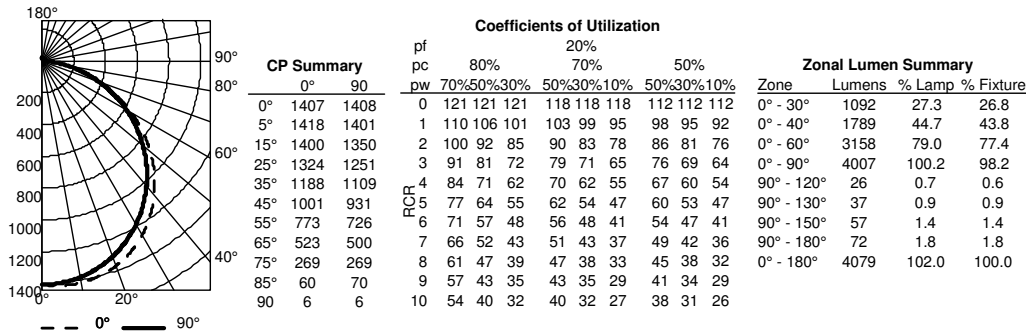







EPANL 22 34L 40K, 3479 delivered lumens

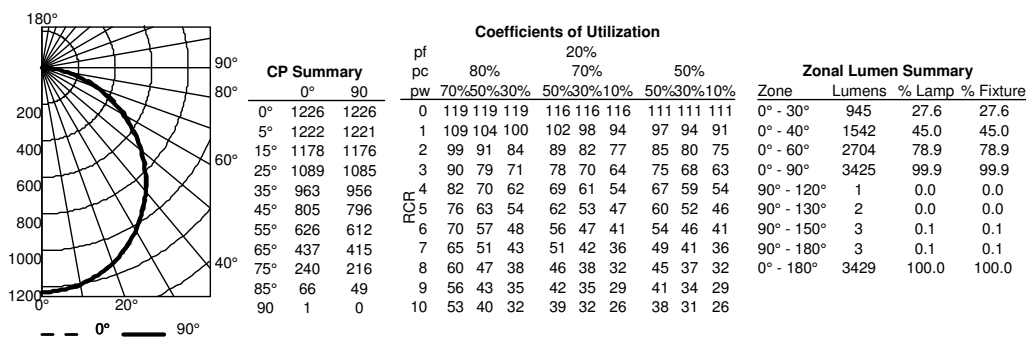

EPANL 24 40L 40K, 4351 delivered lumens

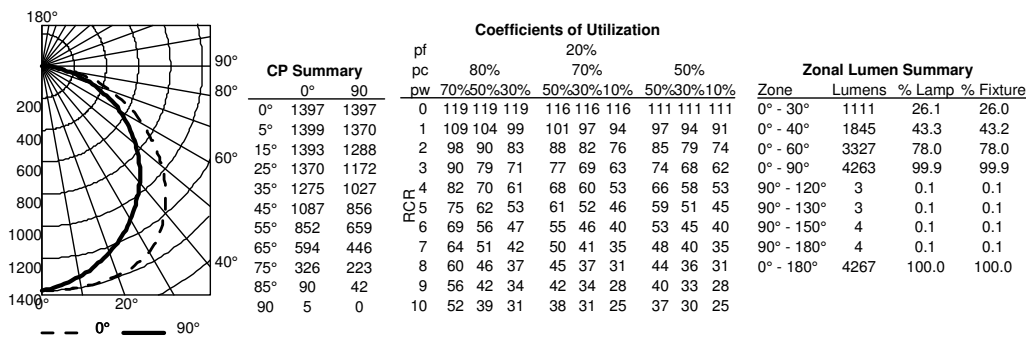

DIMENSIONS

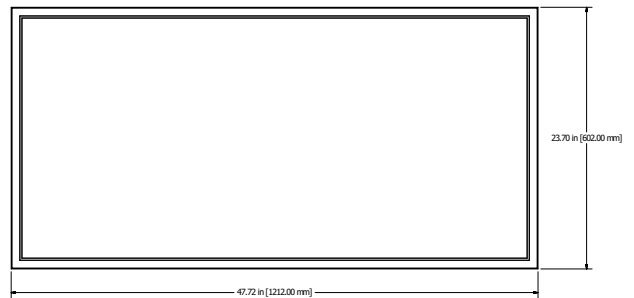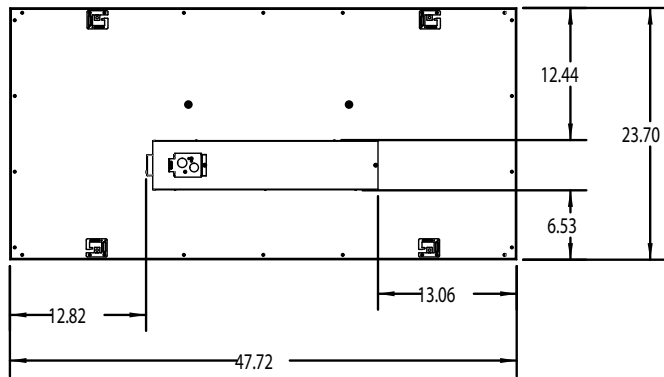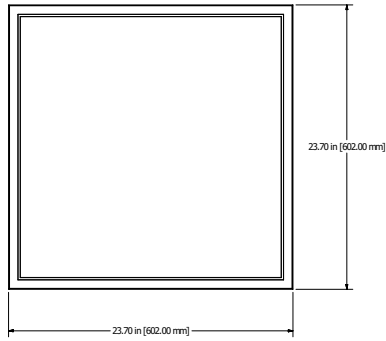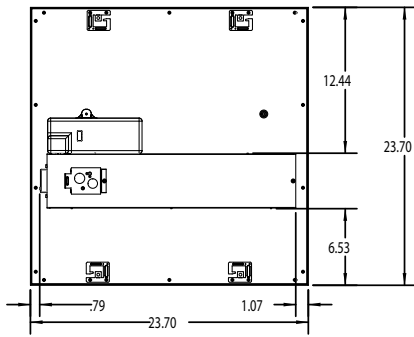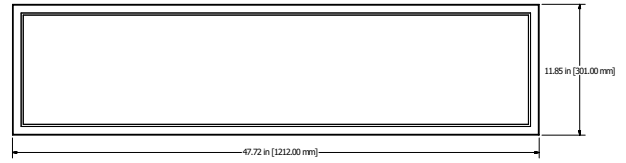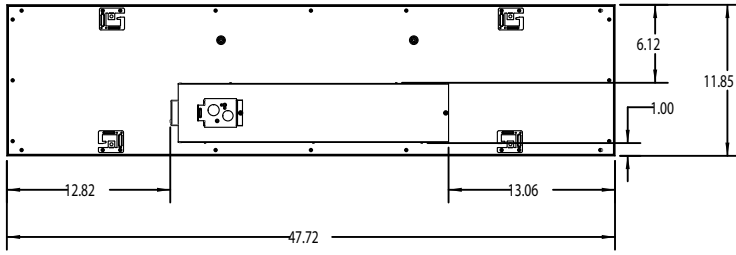

1X4SMKSH, 2X2SMKSH, 2X4SMKSH
SURFACE MOUNT KIT - MOUNTING DATA

