

PRODUCT INFORMATION

EXIT SIGNS



Intended Use
Ideal for applications requiring general-purpose emergency lighting.

Construction
Thermoplastic housing.

Dual voltage 120/277VAC.

LED illuminated exit features low energy consumption.

Fully assembled single-face exit with extra faceplate.

Universal (top, end or back) mounting with canopy included.

Battery back-up models provided with test switch and status indicator for visual and

manual means of monitoring system operation.

One-year warranty.

Listings
UL Listed.


CONTRACTOR
SELECT lightquick **XD**

ORDERING INFORMATION

For additional product information, visit www.lithonia.com.

| CATALOG NUMBER | DESCRIPTION | VOLTS | AMPS | WATTS | STANDARD CARTON QTY. |
|----------------|---------------------------|-------|------|-------|----------------------|
| EXR M6 | Red | 120 | .03 | 3.8 | 6 |
| EXR M6 | Red | 277 | .02 | 3.8 | 6 |
| EXG M6 | Green | 120 | .03 | 3.8 | 6 |
| EXG M6 | Green | 277 | .02 | 3.8 | 6 |
| EXR EL M6 | Red with backup battery | 120 | .03 | 3.8 | 6 |
| EXR EL M6 | Red with backup battery | 277 | .02 | 3.8 | 6 |
| EXG EL M6 | Green with backup battery | 120 | .03 | 3.8 | 6 |
| EXG EL M6 | Green with backup battery | 277 | .02 | 3.8 | 6 |

Drawings are for dimensional detail only and may not represent actual mechanical configuration. Dimensions are shown in inches (centimeters) unless otherwise noted.

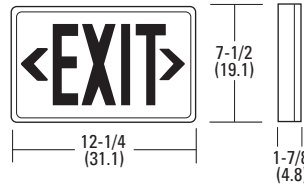

PRODUCT INFORMATION

EXIT-UNIT COMBOS



Intended Use
Ideal for applications requiring general-purpose emergency lighting.

Construction
Thermoplastic housing.

Dual voltage 120/277VAC.

LED illuminated combo sign features low energy consumption.

Fully assembled single-face combo comes with optional extra faceplate.

Top or back mounting capabilities. Canopy provided.

Two 5.4W lamps to provide emergency lighting for 90 minutes, included. High-output option yields 12W extra capacity.

Provided with test switch and status indicator for visual and manual means of monitoring system operation.

One-year warranty.

Listings
UL Listed.

CONTRACTOR
SELECT lightquick **XD**

ORDERING INFORMATION


For additional product information, visit www.lithonia.com.

| CATALOG NUMBER | DESCRIPTION | VOLTS | AMPS | WATTS ¹ | STANDARD CARTON QTY. |
|----------------|------------------|-------|------|--------------------|----------------------|
| ECR M6 | Red | 120 | .1 | 5.4 | 6 |
| ECR M6 | Red | 277 | .05 | 5.4 | 6 |
| ECG M6 | Green | 120 | .1 | 5.4 | 6 |
| ECG M6 | Green | 277 | .05 | 5.4 | 6 |
| ECR HO M6 | Red, high output | 120 | .12 | 5.4 | 6 |
| ECR HO M6 | Red, high output | 277 | .06 | 5.4 | 6 |

ACCESSORIES
ORDER SEPARATELY

| CATALOG NUMBER | DESCRIPTION | VOLTS | WATTS ¹ | STANDARD CARTON QTY. |
|-----------------|-----------------------------------|-------|--------------------|----------------------|
| ELA 6CS M12 | Single remote head | 6 | 5.4 | 12 |
| ELAT 6CS M12 | Double remote head | 6 | 5.4 | 12 |
| ELAT 6CS WP M12 | Double remote head, weather proof | 6 | 5.4 | 12 |

Drawings are for dimensional detail only and may not represent actual mechanical configuration. Dimensions are shown in inches (centimeters) unless otherwise noted.

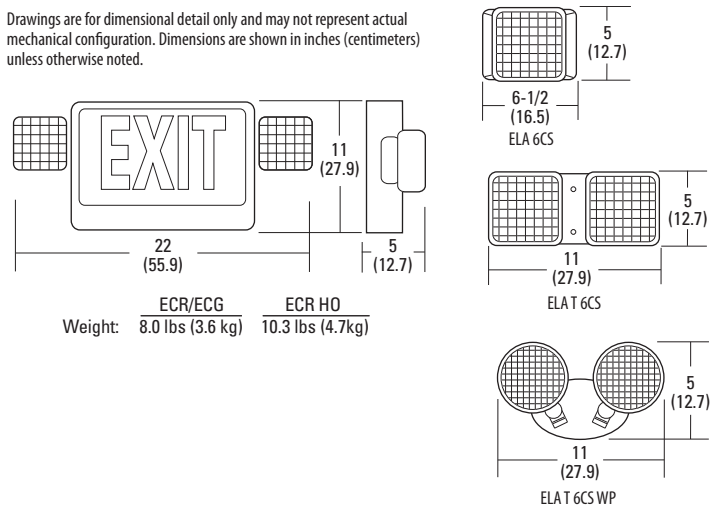

Weight: $\frac{\text{ECR/ECG}}{8.0 \text{ lbs (3.6 kg)}}$ $\frac{\text{ECR HO}}{10.3 \text{ lbs (4.7kg)}}$

Notes
1 Per lamp head.

PRODUCT INFORMATION

EXIT SIGNS



Intended Use
Ideal for applications requiring general-purpose emergency lighting.

Construction
Thermoplastic housing.

Dual voltage 120/277VAC.

LED illuminated exit features low energy consumption.

Fully assembled single-face exit with extra faceplate.

Universal (top, end or back) mounting with canopy included.

Battery back-up models provided with test switch and status indicator for visual and

manual means of monitoring system operation.

One-year warranty.

Listings
UL Listed.


CONTRACTOR
SELECT lightquick **XD**

ORDERING INFORMATION

For additional product information, visit www.lithonia.com.

| CATALOG NUMBER | DESCRIPTION | VOLTS | AMPS | WATTS | STANDARD CARTON QTY. |
|----------------|---------------------------|-------|------|-------|----------------------|
| EXR M6 | Red | 120 | .03 | 3.8 | 6 |
| EXR M6 | Red | 277 | .02 | 3.8 | 6 |
| EXG M6 | Green | 120 | .03 | 3.8 | 6 |
| EXG M6 | Green | 277 | .02 | 3.8 | 6 |
| EXR EL M6 | Red with backup battery | 120 | .03 | 3.8 | 6 |
| EXR EL M6 | Red with backup battery | 277 | .02 | 3.8 | 6 |
| EXG EL M6 | Green with backup battery | 120 | .03 | 3.8 | 6 |
| EXG EL M6 | Green with backup battery | 277 | .02 | 3.8 | 6 |

Drawings are for dimensional detail only and may not represent actual mechanical configuration. Dimensions are shown in inches (centimeters) unless otherwise noted.

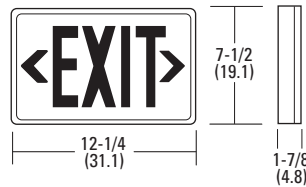

PRODUCT INFORMATION

EXIT-UNIT COMBOS



Intended Use
Ideal for applications requiring general-purpose emergency lighting.

Construction
Thermoplastic housing.

Dual voltage 120/277VAC.

LED illuminated combo sign features low energy consumption.

Fully assembled single-face combo comes with optional extra faceplate.

Top or back mounting capabilities. Canopy provided.

Two 5.4W lamps to provide emergency lighting for 90 minutes, included. High-output option yields 12W extra capacity.

Provided with test switch and status indicator for visual and manual means of monitoring system operation.

One-year warranty.

Listings
UL Listed.

CONTRACTOR
SELECT lightquick **XD**

ORDERING INFORMATION


For additional product information, visit www.lithonia.com.

| CATALOG NUMBER | DESCRIPTION | VOLTS | AMPS | WATTS ¹ | STANDARD CARTON QTY. |
|----------------|------------------|-------|------|--------------------|----------------------|
| ECR M6 | Red | 120 | .1 | 5.4 | 6 |
| ECR M6 | Red | 277 | .05 | 5.4 | 6 |
| ECG M6 | Green | 120 | .1 | 5.4 | 6 |
| ECG M6 | Green | 277 | .05 | 5.4 | 6 |
| ECR HO M6 | Red, high output | 120 | .12 | 5.4 | 6 |
| ECR HO M6 | Red, high output | 277 | .06 | 5.4 | 6 |

ACCESSORIES
ORDER SEPARATELY

| CATALOG NUMBER | DESCRIPTION | VOLTS | WATTS ¹ | STANDARD CARTON QTY. |
|-----------------|-----------------------------------|-------|--------------------|----------------------|
| ELA 6CS M12 | Single remote head | 6 | 5.4 | 12 |
| ELAT 6CS M12 | Double remote head | 6 | 5.4 | 12 |
| ELAT 6CS WP M12 | Double remote head, weather proof | 6 | 5.4 | 12 |

Drawings are for dimensional detail only and may not represent actual mechanical configuration. Dimensions are shown in inches (centimeters) unless otherwise noted.

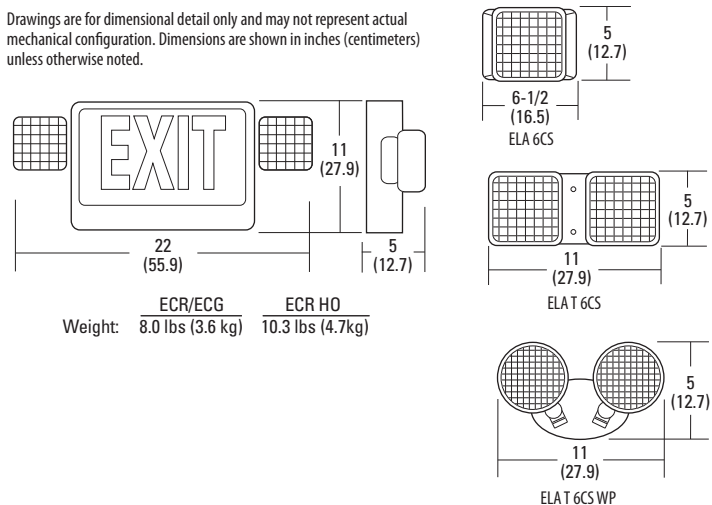

Weight: $\frac{\text{ECR/ECG}}{8.0 \text{ lbs (3.6 kg)}}$ $\frac{\text{ECR HO}}{10.3 \text{ lbs (4.7kg)}}$

Notes
1 Per lamp head.