



Elite A19 A-Lamps

Omni-Directional and All-Purpose

High efficiency A-Lamps. Light output in all directions to suit many applications.

Limitless options for the following applications:

- General Lighting
- Floor Lamps
- Ceiling Fixtures
- Table Lamps
- Sconces

Great features and benefits:

- Energy efficient: Up to 85% more efficient than incandescent alternatives.
- Smooth, uniform dimming; also available as non-dimming.
- Long life: 25,000 hours.
- Similar look and feel as incandescent alternative.
- Excellent color consistency and high color rendering (CRI).
- Available in 2400K, 2700K, 3000K, 4100K and 5000K.
- Fits any installations where a standard A19 bulb is used.
- Rated for totally enclosed fixtures.



All-Purpose A-Lamp



Omni-Directional A-Lamp



LED
we know light.™

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP SEP 2014/54031




LED 25,000 Hours average rated life, 120 Volts

Applications:

Ideal for applications where uniform multi-directional light output is required.


- + Table Lamps
- + Floor Lamps
- + Sconces
- + Ceiling Fixtures
- + Decorative Fixtures

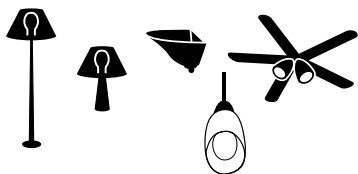

Features

Benefits

| | |
|---|---|
| Up to 85% less energy than halogen alternatives | Instant energy savings |
| Long life | Minimizes replacement and maintenance costs |
| Very low heat generation | Perfect for sensitive display lighting such as art galleries. |
| Excellent Color Consistency and CRI | Enhances colors of focal point while maintaining uniformity throughout lighting installation from lamp to lamp. |
| UL approved for damp location | Can be used outdoors when protected from elements. Withstands humidity indoors/outdoors. |
| Shatter resistant | Lower the risk of injury and breakage |
| ANSI construction compliant | Fits all A19 installations |

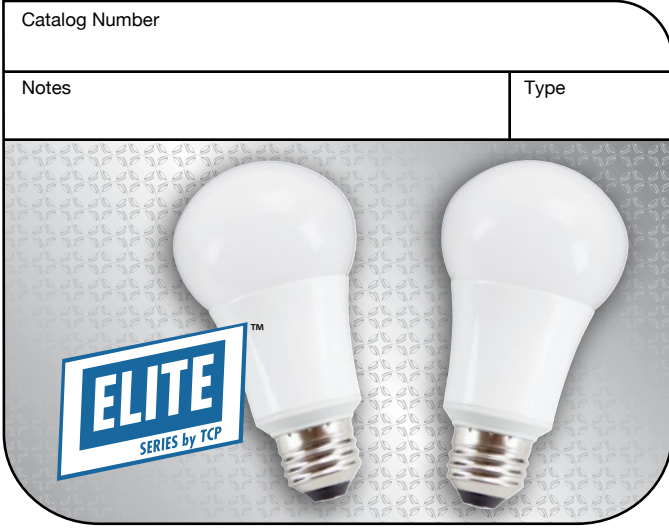

Specifications

| | |
|------------------------|------------|
| Input Line Voltage: | 120 VAC |
| Input Power | See Chart |
| Input Line Frequency | 50/60HZ |
| Lamp Life (Rated) | 25,000 hrs |
| Minimum Starting Temp | -30°C |
| Maximum Operating Temp | 40°C |
| CRI | 82 |



A19 A-Lamp

Omni-Directional



- + Best "technical" A-Lamp replacement
- + Based on ENERGY STAR standard for omni-directional lamps.
- + Supported by many utility rebates.

All-Purpose



- + Best "value" A-Lamp replacement
- + All-purpose lamp with excellent uniformity within 230 degrees that works well in all A-Lamp fixtures.



5 YEAR WARRANTY*

For the most up-to-date specs, please visit www.tcp.com

*Based on 12 hours use per day





Warranties and Certifications:



5 YEAR WARRANTY*

For the most up-to-date specs, please visit www.tcpi.com

*Based on 12 hours use per day

| Item # | Description | Voltage | Wattage | Incandescent Wattage Comparison | Lumens | LPW | CCT | CRI | R9 | M.O.L (inches) | Diameter (inches) | Case Quantity |
|---|----------------------------------|---------|---------|---------------------------------|--------|------|-------|-----|----|----------------|-------------------|---------------|
| 60W Equivalent Options | | | | | | | | | | | | |
| 10W A19 Omni-Directional A-Lamp - Dimmable | | | | | | | | | | | | |
| LED10A19D0D24K | 10W Omni Dimmable A-Lamp - 2400K | 120 | 10 | 60 | 750 | 75.0 | 2400K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D0D27K | 10W Omni Dimmable A-Lamp - 2700K | 120 | 10 | 60 | 800 | 80.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D0D30K | 10W Omni Dimmable A-Lamp - 3000K | 120 | 10 | 60 | 825 | 83.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D0D41K | 10W Omni Dimmable A-Lamp - 4100K | 120 | 10 | 60 | 850 | 85.0 | 4100K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D0D50K | 10W Omni Dimmable A-Lamp - 5000K | 120 | 10 | 60 | 850 | 85.0 | 5000K | 82 | >0 | 4.3 | 2.4 | 12 |
| 10W A19 Omni-Directional A-Lamp - Non Dimmable | | | | | | | | | | | | |
| LED10A19D0D27K | 10W Omni Non Dim A-Lamp - 2700K | 120 | 10 | 60 | 800 | 80.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D0D30K | 10W Omni Non Dim A-Lamp - 3000K | 120 | 10 | 60 | 825 | 83.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| 10W A19 All-Purpose A-Lamp - Dimmable | | | | | | | | | | | | |
| LED10A19D27K | 10W Dimmable A-Lamp - 2700K | 120 | 10 | 60 | 800 | 80.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D30K | 10W Dimmable A-Lamp - 3000K | 120 | 10 | 60 | 825 | 83.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D41K | 10W Dimmable A-Lamp - 4100K | 120 | 10 | 60 | 850 | 85.0 | 4100K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D50K | 10W Dimmable A-Lamp - 5000K | 120 | 10 | 60 | 850 | 85.0 | 5000K | 82 | >0 | 4.3 | 2.4 | 12 |
| 9W A19 All-Purpose A-Lamp - Non Dimmable | | | | | | | | | | | | |
| LED9A1927K | 9W Non Dimmable A-Lamp - 2700K | 120 | 10 | 60 | 800 | 80.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED9A1930K | 9W Non Dimmable A-Lamp - 3000K | 120 | 10 | 60 | 825 | 83.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED9A1941K | 9W Non Dimmable A-Lamp - 4100K | 120 | 10 | 60 | 850 | 85.0 | 4100K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED9A1950K | 9W Non Dimmable A-Lamp - 5000K | 120 | 10 | 60 | 850 | 85.0 | 5000K | 82 | >0 | 4.3 | 2.4 | 12 |
| 40W Equivalent Options | | | | | | | | | | | | |
| 7W A19 Omni-Directional A-Lamp - Dimmable | | | | | | | | | | | | |
| LED7A19D0D24K | 7W Omni Dimmable A-Lamp - 2400K | 120 | 7 | 40 | 400 | 57.0 | 2400K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D0D27K | 7W Omni Dimmable A-Lamp - 2700K | 120 | 7 | 40 | 450 | 64.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D0D30K | 7W Omni Dimmable A-Lamp - 3000K | 120 | 7 | 40 | 475 | 68.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D0D41K | 7W Omni Dimmable A-Lamp - 4100K | 120 | 7 | 40 | 500 | 71.0 | 4100K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D0D50K | 7W Omni Dimmable A-Lamp - 5000K | 120 | 7 | 40 | 500 | 71.0 | 5000K | 82 | >0 | 4.3 | 2.4 | 12 |
| 7W A19 Omni-Directional A-Lamp - Non Dimmable | | | | | | | | | | | | |
| LED7A19D0D27K | 7W Omni Non Dim A-Lamp - 2700K | 120 | 7 | 40 | 450 | 64.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D0D30K | 7W Omni Non Dim A-Lamp - 3000K | 120 | 7 | 40 | 475 | 68.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| 7W A19 All-Purpose A-Lamp - Dimmable | | | | | | | | | | | | |
| LED7A19D24K | 7W Dimmable A-Lamp - 2700K | 120 | 7 | 40 | 400 | 57.0 | 2400K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D27K | 7W Dimmable A-Lamp - 2700K | 120 | 7 | 40 | 450 | 64.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D30K | 7W Dimmable A-Lamp - 3000K | 120 | 7 | 40 | 475 | 68.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D41K | 7W Dimmable A-Lamp - 4100K | 120 | 7 | 40 | 500 | 71.0 | 4100K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D50K | 7W Dimmable A-Lamp - 5000K | 120 | 7 | 40 | 500 | 71.0 | 5000K | 82 | >0 | 4.3 | 2.4 | 12 |
| 5W A19 All-Purpose A-Lamp - Non Dimmable | | | | | | | | | | | | |
| LED5A1927K | 5W Non Dimmable A-Lamp - 2700K | 120 | 7 | 40 | 450 | 64.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED5A1930K | 5W Non Dimmable A-Lamp - 3000K | 120 | 7 | 40 | 475 | 68.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED5A1941K | 5W Non Dimmable A-Lamp - 4100K | 120 | 7 | 40 | 500 | 71.0 | 4100K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED5A1950K | 5W Non Dimmable A-Lamp - 5000K | 120 | 7 | 40 | 525 | 75.0 | 5000K | 82 | >0 | 4.3 | 2.4 | 12 |



CREATING BEAUTY

TCP has a **20-year history in energy-efficient lighting.**

Thanks to our **cutting edge technology** and deep manufacturing

expertise, we have shipped literally billions of high quality lamps and

our **integrated technology** and manufacturing

provides **expedited time-to-market.** With TCP, you can

count on unique lighting products designed to meet very specific needs –

lighting that transforms your surroundings and envelopes you in warmth –

lighting that generates beauty with every flip of the switch.

The logo consists of the letters 'LED' in a large, white, sans-serif font. The 'L' is a simple vertical bar. The 'E' is composed of three horizontal bars. The 'D' is a simple vertical bar with a curved top and bottom.

For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcp.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | F: 330-995-6188



Elite A19 A-Lamps

Omni-Directional and All-Purpose

High efficiency A-Lamps. Light output in all directions to suit many applications.

Limitless options for the following applications:

- General Lighting
- Floor Lamps
- Ceiling Fixtures
- Table Lamps
- Sconces

Great features and benefits:

- Energy efficient: Up to 85% more efficient than incandescent alternatives.
- Smooth, uniform dimming; also available as non-dimming.
- Long life: 25,000 hours.
- Similar look and feel as incandescent alternative.
- Excellent color consistency and high color rendering (CRI).
- Available in 2400K, 2700K, 3000K, 4100K and 5000K.
- Fits any installations where a standard A19 bulb is used.
- Rated for totally enclosed fixtures.



All-Purpose A-Lamp



Omni-Directional A-Lamp



LED
we know light.™

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP SEP 2014/54031




LED 25,000 Hours average rated life, 120 Volts

Applications:

Ideal for applications where uniform multi-directional light output is required.


- + Table Lamps
- + Floor Lamps
- + Sconces
- + Ceiling Fixtures
- + Decorative Fixtures

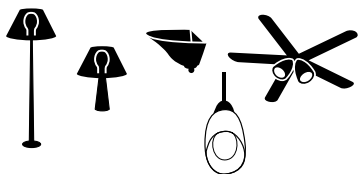

Features

Benefits

| | |
|---|---|
| Up to 85% less energy than halogen alternatives | Instant energy savings |
| Long life | Minimizes replacement and maintenance costs |
| Very low heat generation | Perfect for sensitive display lighting such as art galleries. |
| Excellent Color Consistency and CRI | Enhances colors of focal point while maintaining uniformity throughout lighting installation from lamp to lamp. |
| UL approved for damp location | Can be used outdoors when protected from elements. Withstands humidity indoors/outdoors. |
| Shatter resistant | Lower the risk of injury and breakage |
| ANSI construction compliant | Fits all A19 installations |

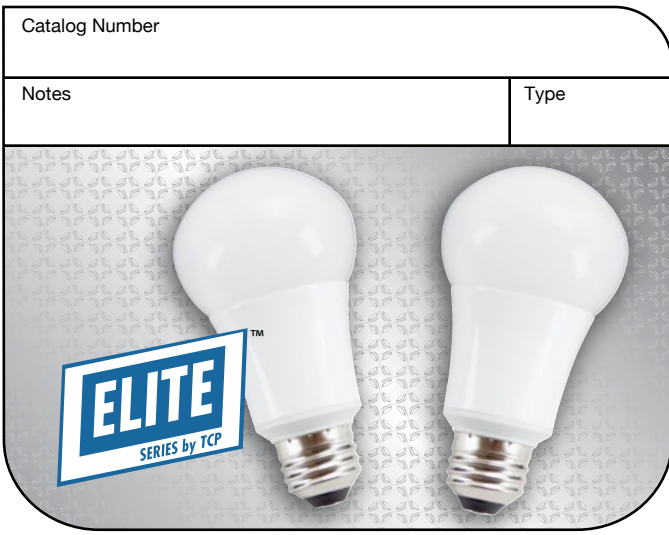

Specifications

| | |
|------------------------|------------|
| Input Line Voltage: | 120 VAC |
| Input Power | See Chart |
| Input Line Frequency | 50/60HZ |
| Lamp Life (Rated) | 25,000 hrs |
| Minimum Starting Temp | -30°C |
| Maximum Operating Temp | 40°C |
| CRI | 82 |



A19 A-Lamp

Omni-Directional



- + Best "technical" A-Lamp replacement
- + Based on ENERGY STAR standard for omni-directional lamps.
- + Supported by many utility rebates.

All-Purpose



- + Best "value" A-Lamp replacement
- + All-purpose lamp with excellent uniformity within 230 degrees that works well in all A-Lamp fixtures.



5 YEAR WARRANTY*

For the most up-to-date specs, please visit www.tcp.com

*Based on 12 hours use per day





Warranties and Certifications:



5 YEAR WARRANTY*

For the most up-to-date specs, please visit www.tcpi.com

*Based on 12 hours use per day

| Item # | Description | Voltage | Wattage | Incandescent Wattage Comparison | Lumens | LPW | CCT | CRI | R9 | M.O.L (inches) | Diameter (inches) | Case Quantity |
|---|----------------------------------|---------|---------|---------------------------------|--------|------|-------|-----|----|----------------|-------------------|---------------|
| 60W Equivalent Options | | | | | | | | | | | | |
| 10W A19 Omni-Directional A-Lamp - Dimmable | | | | | | | | | | | | |
| LED10A19D0D24K | 10W Omni Dimmable A-Lamp - 2400K | 120 | 10 | 60 | 750 | 75.0 | 2400K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D0D27K | 10W Omni Dimmable A-Lamp - 2700K | 120 | 10 | 60 | 800 | 80.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D0D30K | 10W Omni Dimmable A-Lamp - 3000K | 120 | 10 | 60 | 825 | 83.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D0D41K | 10W Omni Dimmable A-Lamp - 4100K | 120 | 10 | 60 | 850 | 85.0 | 4100K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D0D50K | 10W Omni Dimmable A-Lamp - 5000K | 120 | 10 | 60 | 850 | 85.0 | 5000K | 82 | >0 | 4.3 | 2.4 | 12 |
| 10W A19 Omni-Directional A-Lamp - Non Dimmable | | | | | | | | | | | | |
| LED10A19D0D27K | 10W Omni Non Dim A-Lamp - 2700K | 120 | 10 | 60 | 800 | 80.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D0D30K | 10W Omni Non Dim A-Lamp - 3000K | 120 | 10 | 60 | 825 | 83.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| 10W A19 All-Purpose A-Lamp - Dimmable | | | | | | | | | | | | |
| LED10A19D27K | 10W Dimmable A-Lamp - 2700K | 120 | 10 | 60 | 800 | 80.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D30K | 10W Dimmable A-Lamp - 3000K | 120 | 10 | 60 | 825 | 83.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D41K | 10W Dimmable A-Lamp - 4100K | 120 | 10 | 60 | 850 | 85.0 | 4100K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED10A19D50K | 10W Dimmable A-Lamp - 5000K | 120 | 10 | 60 | 850 | 85.0 | 5000K | 82 | >0 | 4.3 | 2.4 | 12 |
| 9W A19 All-Purpose A-Lamp - Non Dimmable | | | | | | | | | | | | |
| LED9A1927K | 9W Non Dimmable A-Lamp - 2700K | 120 | 10 | 60 | 800 | 80.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED9A1930K | 9W Non Dimmable A-Lamp - 3000K | 120 | 10 | 60 | 825 | 83.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED9A1941K | 9W Non Dimmable A-Lamp - 4100K | 120 | 10 | 60 | 850 | 85.0 | 4100K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED9A1950K | 9W Non Dimmable A-Lamp - 5000K | 120 | 10 | 60 | 850 | 85.0 | 5000K | 82 | >0 | 4.3 | 2.4 | 12 |
| 40W Equivalent Options | | | | | | | | | | | | |
| 7W A19 Omni-Directional A-Lamp - Dimmable | | | | | | | | | | | | |
| LED7A19D0D24K | 7W Omni Dimmable A-Lamp - 2400K | 120 | 7 | 40 | 400 | 57.0 | 2400K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D0D27K | 7W Omni Dimmable A-Lamp - 2700K | 120 | 7 | 40 | 450 | 64.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D0D30K | 7W Omni Dimmable A-Lamp - 3000K | 120 | 7 | 40 | 475 | 68.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D0D41K | 7W Omni Dimmable A-Lamp - 4100K | 120 | 7 | 40 | 500 | 71.0 | 4100K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D0D50K | 7W Omni Dimmable A-Lamp - 5000K | 120 | 7 | 40 | 500 | 71.0 | 5000K | 82 | >0 | 4.3 | 2.4 | 12 |
| 7W A19 Omni-Directional A-Lamp - Non Dimmable | | | | | | | | | | | | |
| LED7A19D0D27K | 7W Omni Non Dim A-Lamp - 2700K | 120 | 7 | 40 | 450 | 64.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D0D30K | 7W Omni Non Dim A-Lamp - 3000K | 120 | 7 | 40 | 475 | 68.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| 7W A19 All-Purpose A-Lamp - Dimmable | | | | | | | | | | | | |
| LED7A19D24K | 7W Dimmable A-Lamp - 2700K | 120 | 7 | 40 | 400 | 57.0 | 2400K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D27K | 7W Dimmable A-Lamp - 2700K | 120 | 7 | 40 | 450 | 64.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D30K | 7W Dimmable A-Lamp - 3000K | 120 | 7 | 40 | 475 | 68.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D41K | 7W Dimmable A-Lamp - 4100K | 120 | 7 | 40 | 500 | 71.0 | 4100K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED7A19D50K | 7W Dimmable A-Lamp - 5000K | 120 | 7 | 40 | 500 | 71.0 | 5000K | 82 | >0 | 4.3 | 2.4 | 12 |
| 5W A19 All-Purpose A-Lamp - Non Dimmable | | | | | | | | | | | | |
| LED5A1927K | 5W Non Dimmable A-Lamp - 2700K | 120 | 7 | 40 | 450 | 64.0 | 2700K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED5A1930K | 5W Non Dimmable A-Lamp - 3000K | 120 | 7 | 40 | 475 | 68.0 | 3000K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED5A1941K | 5W Non Dimmable A-Lamp - 4100K | 120 | 7 | 40 | 500 | 71.0 | 4100K | 82 | >0 | 4.3 | 2.4 | 12 |
| LED5A1950K | 5W Non Dimmable A-Lamp - 5000K | 120 | 7 | 40 | 525 | 75.0 | 5000K | 82 | >0 | 4.3 | 2.4 | 12 |



CREATING BEAUTY

TCP has a **20-year history in energy-efficient lighting.**

Thanks to our **cutting edge technology** and deep manufacturing

expertise, we have shipped literally billions of high quality lamps and

our **integrated technology** and manufacturing

provides **expedited time-to-market.** With TCP, you can

count on unique lighting products designed to meet very specific needs –

lighting that transforms your surroundings and envelopes you in warmth –

lighting that generates beauty with every flip of the switch.

The logo consists of the letters 'LED' in a white, sans-serif font. The 'L' is a simple vertical bar. The 'E' is composed of three horizontal bars. The 'D' is a simple vertical bar with a curved top and bottom.

For more information on the quality and care TCP can deliver, call us at **800.324.1496** or visit tcp.com

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | F: 330-995-6188