

|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

## FEATURES & SPECIFICATIONS

**INTENDED USE** — The 6" Wafer-Thin LED recessed downlight with remote driver box combines high quality light output and efficiency while eliminating the pot light housing for competitive affordability. This innovative wafer-slim Type IC design allows easy installation for new construction or remodel from below the ceiling without the requirement of a pot light housing. The LED module maintains at least 70% light output for 36,000 hours. These LED Wafer downlights are intended for closets, attics, hallways, bathrooms, kitchens, basements, soffits, entry ways, porches, garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas.

**CONSTRUCTION** — Ideal for shallow ceiling plenum since a pot light housing is NOT required. IC rated driver and fixture - approved for direct contact with insulation. Aluminum die cast outer frame. Durable, powder coat paint to prevent rust. Round fixture with integral edge-lit LED's. Steel spring clip for easy installation. Plenum rated cable connector to connect from module to remote driver box. Isolated driver integrated inside steel remote box with four 7/8" knockouts with slots for pryout. Not suitable for pulling wires.

**PATENT PENDING.**

**INSTALLATION** — Ideal for shallow ceiling plenum; no housing required. Steel spring clip for easy installation. 6" cut out template is provided to ensure a correct sized hole is cut into ceiling for proper installation of the trim. Size of hole should not exceed 6 1/4 inches for this product. Suitable for installation in t-grid and drop ceiling applications.

**OPTICS** — Wafer-Thin downlight edge-lit LED technology uses light guided plate to distribute light. Polycarbonate lens provides even illumination throughout the space. Utilized 3000K and 4000K color temperature LEDs.

**ELECTRICAL** — Connect directly to 120V power supply via provided UL recognized driver. High efficient driver with power factor > 0.9. Ambient operating temperature: -40°F (-40°C) to +104°F (+40°C). Dimming down to 10% (See page 2 for recommended dimmers). Standard input wattage is 13W, 79 lumens per watt.

**LISTINGS** — CSA certified to US and Canadian safety standards. ENERGY STAR® certified product. Wet location. Air Tight certified in accordance with ASTM E283-2004.

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at:

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

# Wafer LED Recessed Downlight WF6 6" LED Module

IC/Non-IC  
New Construction/Remodel



Matte black






Brushed nickel



Oil-rubbed bronze

*Specifications*

|                  |            |
|------------------|------------|
| Aperture:        | 4.9 (12.4) |
| Ceiling opening: | 6 (15.2)   |
| Overlap trim:    | 6.7 (17)   |
| Height:          | 1.1 (2.8)  |

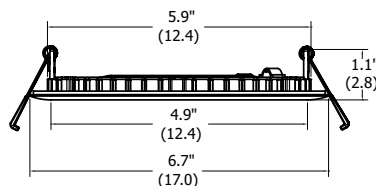

All dimensions are in inches (centimeters) unless otherwise indicated.

**ORDERING INFORMATION**

For shortest lead times, configure product using **standard options (shown in bold)**.

**Example: WF6 LED 30K MW**

| WF6 Series                             | Lamp                        | CCT/CRI/W/Lumens <sup>1</sup>      | Finish                       |
|--|-----------------------------|------------------------------------|------------------------------|
| <b>WF6</b> 6" wafer-thin LED downlight | <b>LED</b> LED              | <b>30K</b> 3000K/80CRI/13W/1020L   | <b>MW</b> Matte white        |
|  |                             | <b>40K</b> 4000K/80CRI/13.6W/1200L | <b>MB</b> Matte black        |
|  | <b>LL LED</b> Low Lumen LED | <b>27K</b> 2700K/80CRI/12.7W/780L  | <b>BN</b> Brushed nickel     |
|  |                             | <b>30K</b> 3000K/80CRI/12.6W/865L  | <b>ORB</b> Oil-rubbed bronze |
|  |                             | <b>40K</b> 4000K/80CRI/12.9W/944L  |                              |
|  |                             |                                    |                              |

**Accessories:** Order as separate catalog number.

|             |  |
|-------------|--|
| WF6 PAN R12 | 6" new construction pan, retail pack of 12 |
| WFJB R4     | Remodel joist bar, retail pack of 4        |
| WFEXC6 U    | 6' FT4 cable                               |
| WFEXC10 U   | 10' FT4 cable                              |
| WFEXC20 U   | 20' FT4 cable                              |



**Notes**


1 Total system delivered lumens.

# WF6 6" LED Wafer Module


## PHOTOMETRICS

Distribution Curve      Distribution Data      Output Data      Coefficient of Utilization      Illuminance Data at 30" Above Floor for a Single Luminaire


**WF6 LED 30K**, 3000 K LEDs, input watts: 13, delivered lumens: 1020, LM/W=78.5, test no. ISF 30024

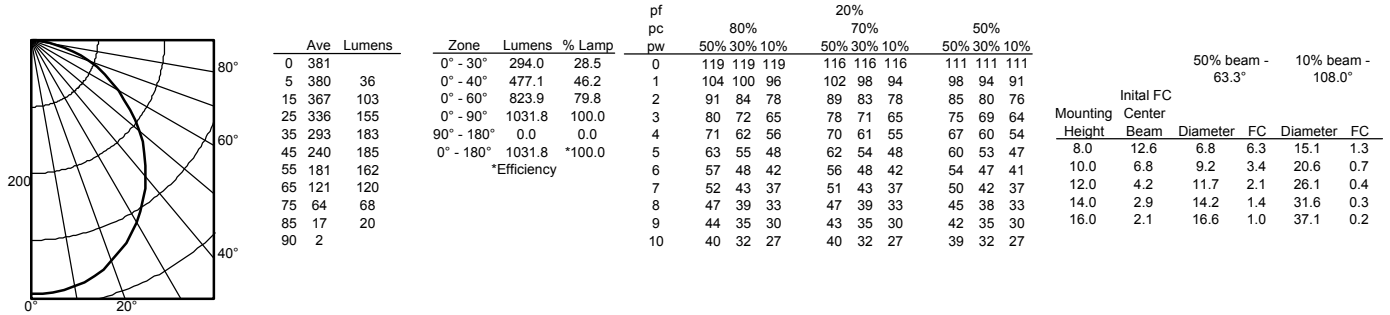


**WF6 LED 40K**, 4000 K LEDs, input watts: 13.6, delivered lumens: 1200, LM/W=88.2, test no. ISF 30376

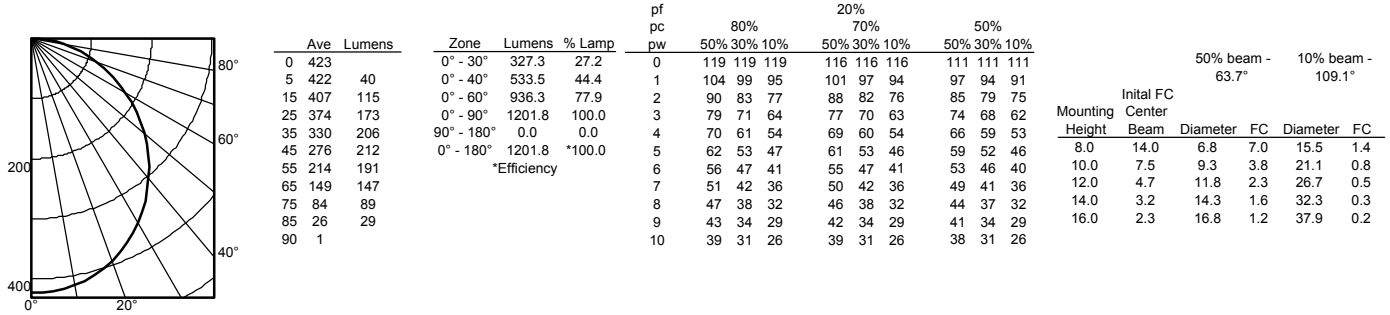

**WF6 LL LED 27K**, 2700 K LEDs, input watts: 12.7, delivered lumens: 819, LM/W=64.4, test no. ISF 32780P1

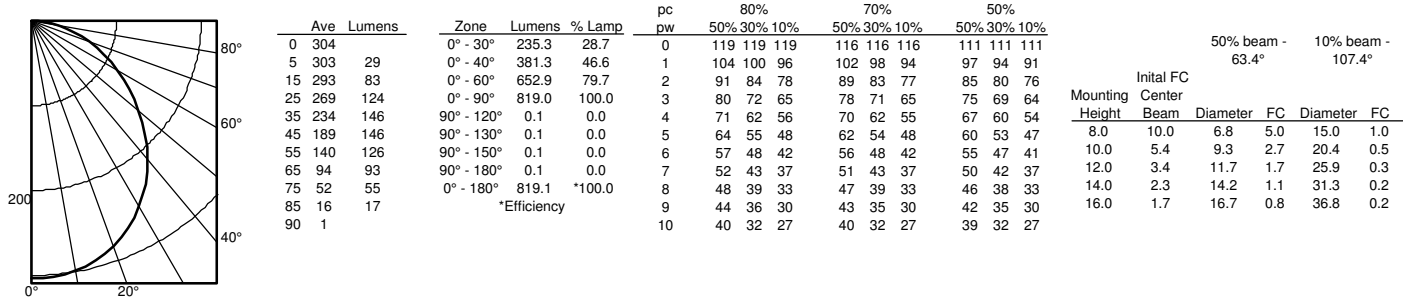


**WF6 LL LED 30K**, 3000 K LEDs, input watts: 12.6, delivered lumens: 865, LM/W=68.7, test no. ISF 32781

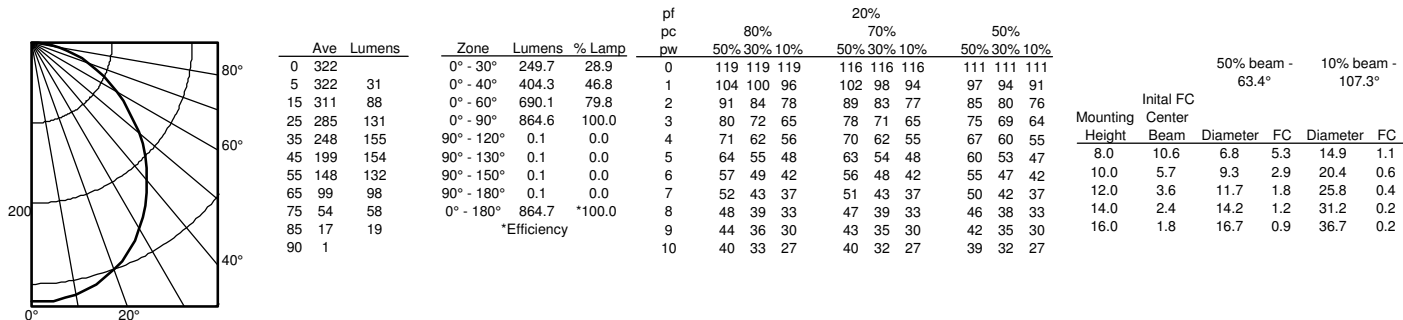

# WF6 6" LED Wafer Module

WF6 LL LED 40K, 4000 K LEDs, input watts: 12.9, delivered lumens: 944, LM/W=73.2, test no. ISF 32780

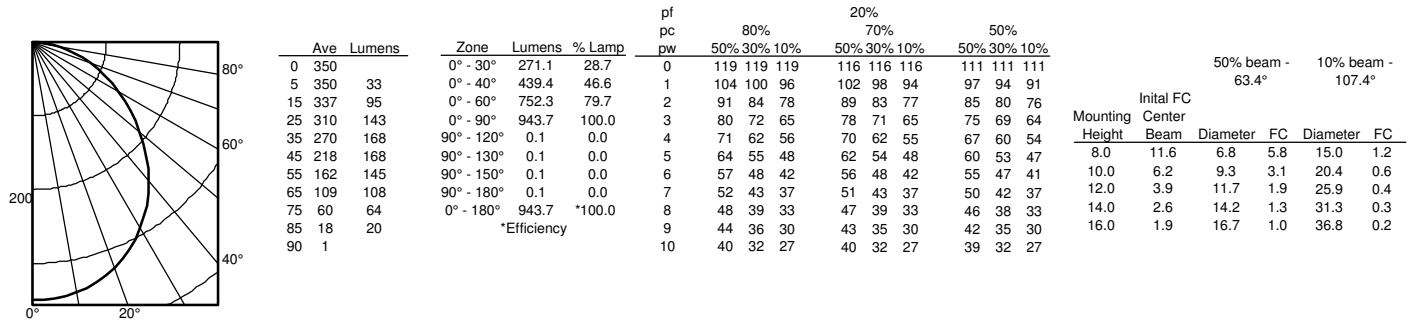

## ENERGY DATA & DIMMING CAPABILITY

| 6" ENERGY DATA            |                                    |                                    |
|---------------------------|------------------------------------|------------------------------------|
| Color Temperature         | 3000K                              | 4000K                              |
| Lumens                    | 1020                               | 1200                               |
| CRI                       | 80                                 | 80                                 |
| Lumens/Watt               | 78.5                               | 88.2                               |
| Min. starting temperature | -40°C (-40°F)                      | -40°C (-40°F)                      |
| EMI/RFI                   | FCC Title 47 CFR, Part 15, Class B | FCC Title 47 CFR, Part 15, Class B |
| Sound rating              | Class A Standards                  | Class A Standards                  |
| Input voltage             | 120V                               | 120V                               |
| Total Harmonic Distortion | 17.9%                              | 17.9%                              |
| Min. power factor         | 0.99                               | 0.99                               |
| Input frequency           | 50/60 Hz                           | 50/60 Hz                           |
| Rated wattage             | 13W                                | 13.6W                              |
| Input power               | 13W                                | 13.6W                              |
| Input current             | 0.11A                              | 0.11A                              |

| 6" LOW LUMEN ENERGY DATA  |                                    |                                    |                                    |
|---------------------------|------------------------------------|------------------------------------|------------------------------------|
| Color Temperature         | 2700K                              | 3000K                              | 4000K                              |
| Lumens                    | 780                                | 865                                | 944                                |
| CRI                       | 80                                 | 80                                 | 80                                 |
| Lumens/Watt               | 61.3                               | 68.7                               | 73.2                               |
| Min. starting temperature | -40°C (-40°F)                      | -40°C (-40°F)                      | -40°C (-40°F)                      |
| EMI/RFI                   | FCC Title 47 CFR, Part 15, Class B | FCC Title 47 CFR, Part 15, Class B | FCC Title 47 CFR, Part 15, Class B |
| Sound rating              | Class A Standards                  | Class A Standards                  | Class A Standards                  |
| Input voltage             | 120V                               | 120V                               | 120V                               |
| Total Harmonic Distortion | 12%                                | 15.0%                              | 11.6%                              |
| Min. power factor         | 0.99                               | 0.99                               | 0.99                               |
| Input frequency           | 50/60 Hz                           | 50/60 Hz                           | 50/60 Hz                           |
| Rated wattage             | 12.7W                              | 12.6W                              | 12.9W                              |
| Input power               | 12.7W                              | 12.6W                              | 12.9W                              |
| Input current             | 0.11A                              | 0.11A                              | 0.11A                              |

| COMPATIBLE DIMMERS |                    |              |                  |                       |
|--------------------|--------------------|--------------|------------------|-----------------------|
| Insteon            | Leviton            | Lutron       | Sensorswitch     | Synergy/Leviton       |
| 2477D              | 6633-PA            | CTCL-153P-WH | nSP5 PCD 2W      | ISD 600 I 120/IP106   |
|                    | IPL06-LED/INC mode | DV-603P-LA   | nSP5 PCD ELV 120 | ISD 400 ELV 120/IPE04 |
|                    | 6615-P             | CT-603PR-WH  |                  |                       |
|                    |                    | DVELV-300P   |                  |                       |
|                    |                    | NTELV-300P   |                  |                       |
|                    |                    | NLV600       |                  |                       |
|                    |                    | 300P-SELV    |                  |                       |
|                    |                    | DV-600P      |                  |                       |
|                    |                    | AYCL-153P-WH |                  |                       |
|                    |                    | CTCL-153P-WH |                  |                       |

## LIGHTING FACTS

LITHONIA LIGHTING

**LED lighting facts**  
A Program of the U.S. DOE

|                            |       |
|----------------------------|-------|
| Light Output (Lumens)      | 1020  |
| Watts                      | 13    |
| Lumens per Watt (Efficacy) | 78.46 |

|   |    |
|---|----|
| Color Accuracy<br>Color Rendering Index (CRI) | 80 |
|---|----|

**Light Color**  
Correlated Color Temperature (CCT) **3000 (Bright White)**

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-DA1SC6 (3/15/2016)  
Model Number: WF6 LED 30K  
Type: Luminaire - Downlight

LITHONIA LIGHTING

**LED lighting facts**  
A Program of the U.S. DOE

|                            |       |
|----------------------------|-------|
| Light Output (Lumens)      | 1200  |
| Watts                      | 13.6  |
| Lumens per Watt (Efficacy) | 88.24 |

|   |    |
|---|----|
| Color Accuracy<br>Color Rendering Index (CRI) | 80 |
|---|----|

**Light Color**  
Correlated Color Temperature (CCT) **4000 (Bright White)**

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-WQ6E6W (3/15/2016)  
Model Number: WF6 LED 40K  
Type: Luminaire - Downlight

Lithonia Lighting

**LED lighting facts**  
A Program of the U.S. DOE

|                            |       |
|----------------------------|-------|
| Light Output (Lumens)      | 780   |
| Watts                      | 12.73 |
| Lumens per Watt (Efficacy) | 61.27 |

|   |    |
|---|----|
| Color Accuracy<br>Color Rendering Index (CRI) | 80 |
|---|----|

**Light Color**  
Correlated Color Temperature (CCT) **2700 (Warm White)**

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-OBTASU (1/5/2017)  
Model Number: WF6 LLED 27K  
Type: Luminaire - Downlight

Lithonia Lighting

**LED lighting facts**  
A Program of the U.S. DOE

|                            |       |
|----------------------------|-------|
| Light Output (Lumens)      | 800   |
| Watts                      | 12.6  |
| Lumens per Watt (Efficacy) | 63.49 |

|   |    |
|---|----|
| Color Accuracy<br>Color Rendering Index (CRI) | 80 |
|---|----|

**Light Color**  
Correlated Color Temperature (CCT) **3000 (Bright White)**

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-A6485S (12/1/2016)  
Model Number: WF6 LLED 30K  
Type: Luminaire - Downlight

Lithonia Lighting

**LED lighting facts**  
A Program of the U.S. DOE

|                            |       |
|----------------------------|-------|
| Light Output (Lumens)      | 850   |
| Watts                      | 12.9  |
| Lumens per Watt (Efficacy) | 65.89 |

|   |    |
|---|----|
| Color Accuracy<br>Color Rendering Index (CRI) | 80 |
|---|----|

**Light Color**  
Correlated Color Temperature (CCT) **4000 (Bright White)**

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-PKWQC4 (12/1/2016)  
Model Number: WF6 LLED 40K  
Type: Luminaire - Downlight

|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

## FEATURES & SPECIFICATIONS

**INTENDED USE** — The 6" Wafer-Thin LED recessed downlight with remote driver box combines high quality light output and efficiency while eliminating the pot light housing for competitive affordability. This innovative wafer-slim Type IC design allows easy installation for new construction or remodel from below the ceiling without the requirement of a pot light housing. The LED module maintains at least 70% light output for 36,000 hours. These LED Wafer downlights are intended for closets, attics, hallways, bathrooms, kitchens, basements, soffits, entry ways, porches, garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas.

**CONSTRUCTION** — Ideal for shallow ceiling plenum since a pot light housing is NOT required. IC rated driver and fixture - approved for direct contact with insulation. Aluminum die cast outer frame. Durable, powder coat paint to prevent rust. Round fixture with integral edge-lit LED's. Steel spring clip for easy installation. Plenum rated cable connector to connect from module to remote driver box. Isolated driver integrated inside steel remote box with four 7/8" knockouts with slots for pryout. Not suitable for pulling wires.

**PATENT PENDING.**

**INSTALLATION** — Ideal for shallow ceiling plenum; no housing required. Steel spring clip for easy installation. 6" cut out template is provided to ensure a correct sized hole is cut into ceiling for proper installation of the trim. Size of hole should not exceed 6 1/4 inches for this product. Suitable for installation in t-grid and drop ceiling applications.

**OPTICS** — Wafer-Thin downlight edge-lit LED technology uses light guided plate to distribute light. Polycarbonate lens provides even illumination throughout the space. Utilized 3000K and 4000K color temperature LEDs.

**ELECTRICAL** — Connect directly to 120V power supply via provided UL recognized driver. High efficient driver with power factor > 0.9. Ambient operating temperature: -40°F (-40°C) to +104°F (+40°C). Dimming down to 10% (See page 2 for recommended dimmers). Standard input wattage is 13W, 79 lumens per watt.

**LISTINGS** — CSA certified to US and Canadian safety standards. ENERGY STAR® certified product. Wet location. Air Tight certified in accordance with ASTM E283-2004.

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at:

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

# Wafer LED Recessed Downlight WF6 6" LED Module

IC/Non-IC  
New Construction/Remodel



Matte black






Brushed nickel



Oil-rubbed bronze

*Specifications*

|                  |            |
|------------------|------------|
| Aperture:        | 4.9 (12.4) |
| Ceiling opening: | 6 (15.2)   |
| Overlap trim:    | 6.7 (17)   |
| Height:          | 1.1 (2.8)  |

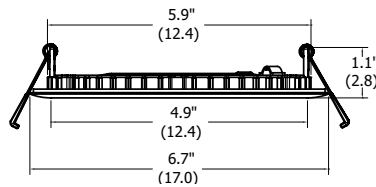

All dimensions are in inches (centimeters) unless otherwise indicated.

**ORDERING INFORMATION**

For shortest lead times, configure product using **standard options (shown in bold)**.

**Example: WF6 LED 30K MW**

| WF6 Series                             | Lamp                        | CCT/CRI/W/Lumens <sup>1</sup>      | Finish                       |
|--|-----------------------------|------------------------------------|------------------------------|
| <b>WF6</b> 6" wafer-thin LED downlight | <b>LED</b> LED              | <b>30K</b> 3000K/80CRI/13W/1020L   | <b>MW</b> Matte white        |
|  |                             | <b>40K</b> 4000K/80CRI/13.6W/1200L | <b>MB</b> Matte black        |
|  | <b>LL LED</b> Low Lumen LED | <b>27K</b> 2700K/80CRI/12.7W/780L  | <b>BN</b> Brushed nickel     |
|  |                             | <b>30K</b> 3000K/80CRI/12.6W/865L  | <b>ORB</b> Oil-rubbed bronze |
|  |                             | <b>40K</b> 4000K/80CRI/12.9W/944L  |                              |
|  |                             |                                    |                              |

**Accessories:** Order as separate catalog number.

|             |  |
|-------------|--|
| WF6 PAN R12 | 6" new construction pan, retail pack of 12 |
| WFJB R4     | Remodel joist bar, retail pack of 4        |
| WFEXC6 U    | 6' FT4 cable                               |
| WFEXC10 U   | 10' FT4 cable                              |
| WFEXC20 U   | 20' FT4 cable                              |



WF3\_Pan



Joist



Extension Cable

**Notes**


1 Total system delivered lumens.

# WF6 6" LED Wafer Module


## PHOTOMETRICS

Distribution Curve      Distribution Data      Output Data      Coefficient of Utilization      Illuminance Data at 30" Above Floor for a Single Luminaire


**WF6 LED 30K**, 3000 K LEDs, input watts: 13, delivered lumens: 1020, LM/W=78.5, test no. ISF 30024

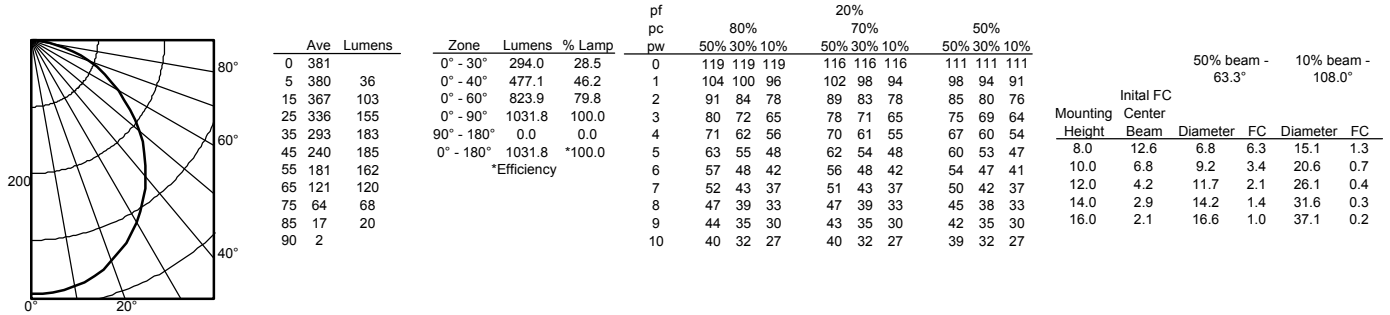


**WF6 LED 40K**, 4000 K LEDs, input watts: 13.6, delivered lumens: 1200, LM/W=88.2, test no. ISF 30376

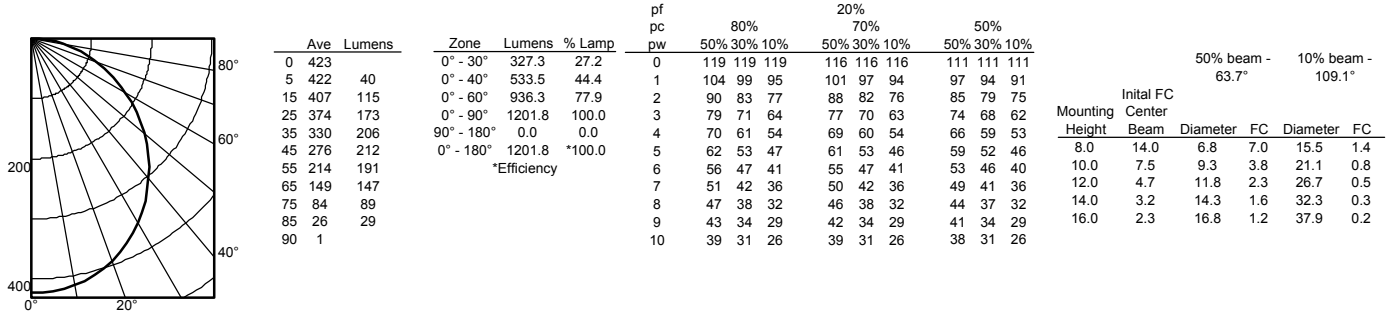

**WF6 LL LED 27K**, 2700 K LEDs, input watts: 12.7, delivered lumens: 819, LM/W=64.4, test no. ISF 32780P1

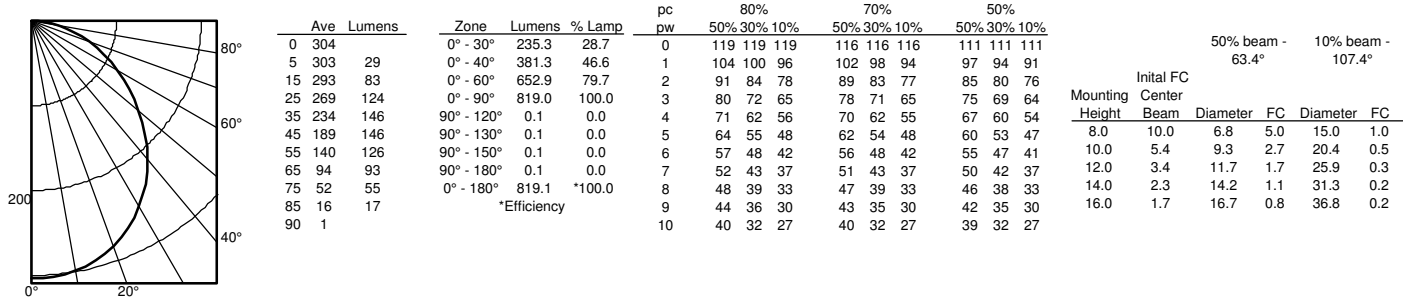


**WF6 LL LED 30K**, 3000 K LEDs, input watts: 12.6, delivered lumens: 865, LM/W=68.7, test no. ISF 32781

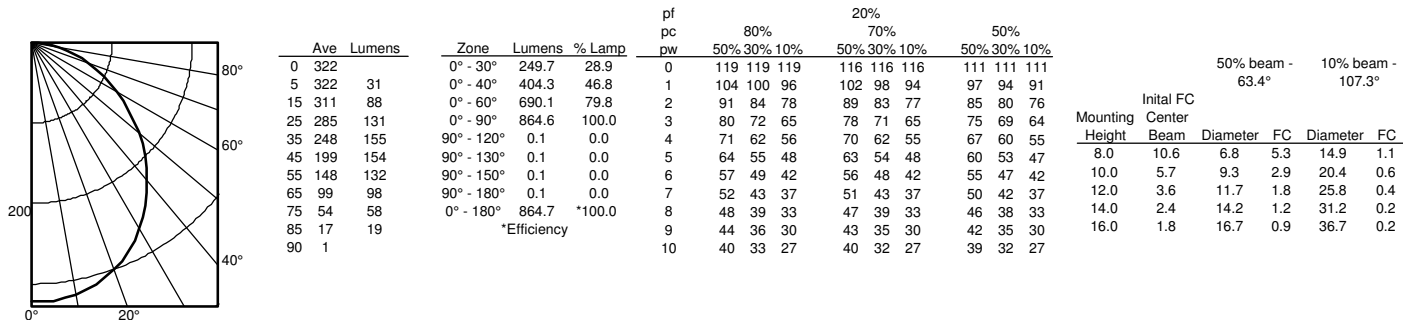

# WF6 6" LED Wafer Module

WF6 LL LED 40K, 4000 K LEDs, input watts: 12.9, delivered lumens: 944, LM/W=73.2, test no. ISF 32780

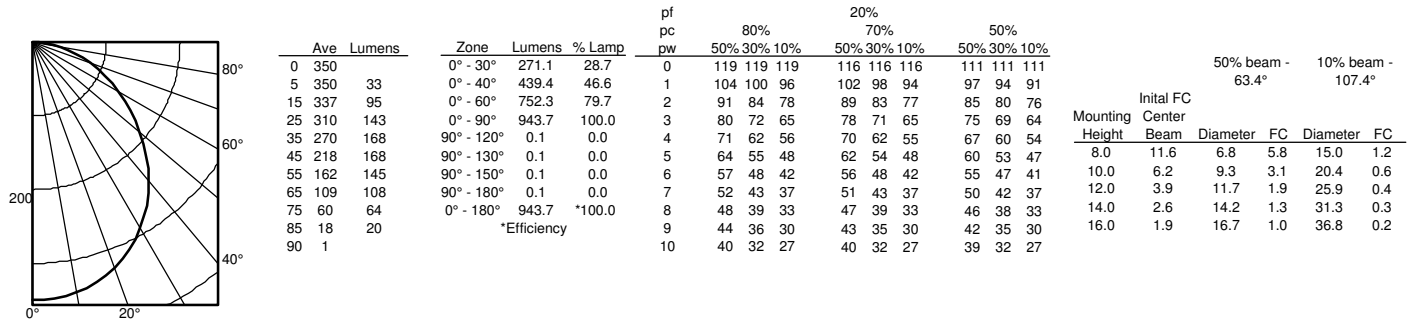

## ENERGY DATA & DIMMING CAPABILITY

| 6" ENERGY DATA            |                                    |                                    |
|---------------------------|------------------------------------|------------------------------------|
| Color Temperature         | 3000K                              | 4000K                              |
| Lumens                    | 1020                               | 1200                               |
| CRI                       | 80                                 | 80                                 |
| Lumens/Watt               | 78.5                               | 88.2                               |
| Min. starting temperature | -40°C (-40°F)                      | -40°C (-40°F)                      |
| EMI/RFI                   | FCC Title 47 CFR, Part 15, Class B | FCC Title 47 CFR, Part 15, Class B |
| Sound rating              | Class A Standards                  | Class A Standards                  |
| Input voltage             | 120V                               | 120V                               |
| Total Harmonic Distortion | 17.9%                              | 17.9%                              |
| Min. power factor         | 0.99                               | 0.99                               |
| Input frequency           | 50/60 Hz                           | 50/60 Hz                           |
| Rated wattage             | 13W                                | 13.6W                              |
| Input power               | 13W                                | 13.6W                              |
| Input current             | 0.11A                              | 0.11A                              |

| 6" LOW LUMEN ENERGY DATA  |                                    |                                    |                                    |
|---------------------------|------------------------------------|------------------------------------|------------------------------------|
| Color Temperature         | 2700K                              | 3000K                              | 4000K                              |
| Lumens                    | 780                                | 865                                | 944                                |
| CRI                       | 80                                 | 80                                 | 80                                 |
| Lumens/Watt               | 61.3                               | 68.7                               | 73.2                               |
| Min. starting temperature | -40°C (-40°F)                      | -40°C (-40°F)                      | -40°C (-40°F)                      |
| EMI/RFI                   | FCC Title 47 CFR, Part 15, Class B | FCC Title 47 CFR, Part 15, Class B | FCC Title 47 CFR, Part 15, Class B |
| Sound rating              | Class A Standards                  | Class A Standards                  | Class A Standards                  |
| Input voltage             | 120V                               | 120V                               | 120V                               |
| Total Harmonic Distortion | 12%                                | 15.0%                              | 11.6%                              |
| Min. power factor         | 0.99                               | 0.99                               | 0.99                               |
| Input frequency           | 50/60 Hz                           | 50/60 Hz                           | 50/60 Hz                           |
| Rated wattage             | 12.7W                              | 12.6W                              | 12.9W                              |
| Input power               | 12.7W                              | 12.6W                              | 12.9W                              |
| Input current             | 0.11A                              | 0.11A                              | 0.11A                              |

| COMPATIBLE DIMMERS |                    |              |                  |                       |
|--------------------|--------------------|--------------|------------------|-----------------------|
| Insteon            | Leviton            | Lutron       | Sensorswitch     | Synergy/Leviton       |
| 2477D              | 6633-PA            | CTCL-153P-WH | nSP5 PCD 2W      | ISD 600 I 120/IP106   |
|                    | IPL06-LED/INC mode | DV-603P-LA   | nSP5 PCD ELV 120 | ISD 400 ELV 120/IPE04 |
|                    | 6615-P             | CT-603PR-WH  |                  |                       |
|                    |                    | DVELV-300P   |                  |                       |
|                    |                    | NTELV-300P   |                  |                       |
|                    |                    | NLV600       |                  |                       |
|                    |                    | 300P-SELV    |                  |                       |
|                    |                    | DV-600P      |                  |                       |
|                    |                    | AYCL-153P-WH |                  |                       |
|                    |                    | CTCL-153P-WH |                  |                       |

## LIGHTING FACTS

**LED lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 1020  
**Watts** 13  
**Lumens per Watt (Efficacy)** 78.46

**Color Accuracy**  
Color Rendering Index (CRI) 80

**Light Color**  
Correlated Color Temperature (CCT) 3000 (Bright White)

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-DA1SC6 (3/15/2016)  
Model Number: WF6 LED 30K  
Type: Luminaire - Downlight

**LED lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 1200  
**Watts** 13.6  
**Lumens per Watt (Efficacy)** 88.24

**Color Accuracy**  
Color Rendering Index (CRI) 80

**Light Color**  
Correlated Color Temperature (CCT) 4000 (Bright White)

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-WQ6E6W (3/15/2016)  
Model Number: WF6 LED 40K  
Type: Luminaire - Downlight

**LED lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 780  
**Watts** 12.73  
**Lumens per Watt (Efficacy)** 61.27

**Color Accuracy**  
Color Rendering Index (CRI) 80

**Light Color**  
Correlated Color Temperature (CCT) 2700 (Warm White)

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-OBTASU (1/5/2017)  
Model Number: WF6 LLED 27K  
Type: Luminaire - Downlight

**LED lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 800  
**Watts** 12.6  
**Lumens per Watt (Efficacy)** 63.49

**Color Accuracy**  
Color Rendering Index (CRI) 80

**Light Color**  
Correlated Color Temperature (CCT) 3000 (Bright White)

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-A6485S (12/1/2016)  
Model Number: WF6 LLED 30K  
Type: Luminaire - Downlight

**LED lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 850  
**Watts** 12.9  
**Lumens per Watt (Efficacy)** 65.89

**Color Accuracy**  
Color Rendering Index (CRI) 80

**Light Color**  
Correlated Color Temperature (CCT) 4000 (Bright White)

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-PKWQC4 (12/1/2016)  
Model Number: WF6 LLED 40K  
Type: Luminaire - Downlight