



Catalog No. MEQ (0.1 - 30A)
500Vac or Less
Time-Delay

| Amp Ratings | | | | |
|-------------|-------|------|------|----|
| MEQ | | | | |
| 0.1 | 0.6 | 2.25 | 5.6 | 15 |
| 0.125 | 0.8 | 2.5 | 6 | 20 |
| 0.15 | 1 | 3 | 6.25 | 25 |
| 0.2 | 1.125 | 3.2 | 7 | 30 |
| 0.25 | 1.25 | 3.5 | 8 | — |
| 0.3 | 1.5 | 4 | 9 | — |
| 0.4 | 1.6 | 4.5 | 10 | — |
| 0.5 | 2 | 5 | 12 | — |

| Dimensions - inches | | |
|---------------------|---------|--------|
| Amps | Ferrule | Length |
| 0.1 - 30 | 13/32 | 1-1/2 |

MEQ Specifications

Time-Delay

Voltage Rating: 500Vac
Amp Rating: 0.1 - 30 Amps
Interrupting Rating: 10kA RMS Amps
Agency Approvals:
 (0.1 - 30) UL Listed, File E162443
 (0.1 - 30) CSA Cert, LR700489

Benefits:

- Compact dimensions.
- Fiber tube construction.
- Time-delay allows harmless inductive surges to pass without needless fuse opening.

Applications:

- Supplemental protection of transformers, solenoids, and other high inrush circuits.
- For motor applications, refer to EDCC.

Recommended Fuse Blocks: Page 151. **Recommended Inline Fuse Holders:** Page 147. **Recommended Panel Mount Holders:** Page 150.



Catalog No. MEN (0.1 - 30A)
250Vac or Less
Time-Delay

| Amp Ratings | | | | |
|-------------|-------|------|------|----|
| MEN | | | | |
| 0.1 | 0.8 | 2 | 4.5 | 10 |
| 0.15 | 1 | 2.25 | 5 | 12 |
| 0.2 | 1.125 | 2.5 | 5.6 | 15 |
| 0.25 | 1.25 | 2.8 | 6 | 20 |
| 0.3 | 1.4 | 3 | 6.25 | 25 |
| 0.4 | 1.5 | 3.2 | 7 | 30 |
| 0.5 | 1.6 | 3.5 | 8 | — |
| 0.6 | 1.8 | 4 | 9 | — |

| Dimensions - inches | | |
|---------------------|---------|--------|
| Amps | Ferrule | Length |
| 0.1 - 30 | 13/32 | 1-1/2 |

MEN Specifications

Time-Delay

Voltage Rating: 250Vac
Amp Rating: 0.5 - 30 Amps
Interrupting Rating: 10kA RMS Amps @ 125V
Agency Approvals:
 UL Listed, File E162443
 CSA Cert., LR700489

Benefits:

- Compact dimensions.
- Fiber tube construction.
- Dual-element construction allows harmless inductive surges to pass without opening.

Applications:

- Supplemental protection of small motors, transformers, solenoids, and other high inrush power electronic circuits.



Catalog No. MID (0.1 - 30A)
0.1 - 0.8A 250Vac or Less
1 - 15A 125Vac or Less
20 - 30A 32Vac or Less
Pin Indicating - Time-Delay

| Amp Ratings | | | | |
|-------------|-------|------|------|----|
| MID | | | | |
| 0.1 | 1 | 2.25 | 5.6 | 15 |
| 0.15 | 1.125 | 2.5 | 6 | 20 |
| 0.2 | 1.25 | 2.8 | 6.25 | 25 |
| 0.3 | 1.4 | 3 | 7 | 30 |
| 0.4 | 1.5 | 3.2 | 8 | — |
| 0.5 | 1.6 | 3.5 | 9 | — |
| 0.6 | 1.8 | 4 | 10 | — |
| 0.8 | 2 | 5 | 12 | — |

| Dimensions - inches | | |
|---------------------|---------|--------|
| Amps | Ferrule | Length |
| 0.1 - 30 | 13/32 | 1-1/2 |

NOTE: 12-30 amp is dual-tube construction.

MID Specifications

Pin Indicating — Time-Delay

Voltage Rating: 0.1 - 0.8 Amps, 250Vac
 1 - 15 Amps, 125Vac
 20 - 30 Amps, 32Vac
Amp Rating: 0.1 - 30 Amps

Interrupting Rating:
 10kA @ 125Vac (1/10-15A)
 1000A @ 32Vac (20-30A)
 35A @ 280Vac (1/10-8/10A)

Agency Approvals:
 UL Listed, File E162443
 CSA Cert., LR700489

Benefits:

- Compact dimensions.
- Silver-plated pin indicates when fuse is opened. Provides positive electrical signal activation.


Applications:

- Supplemental protection for high inrush power electronic circuits.


Recommended Fuse Blocks:
 Refer to page 135 in this catalog.

Average Time-Current Curve


Cat. No. MEQ (Amp)

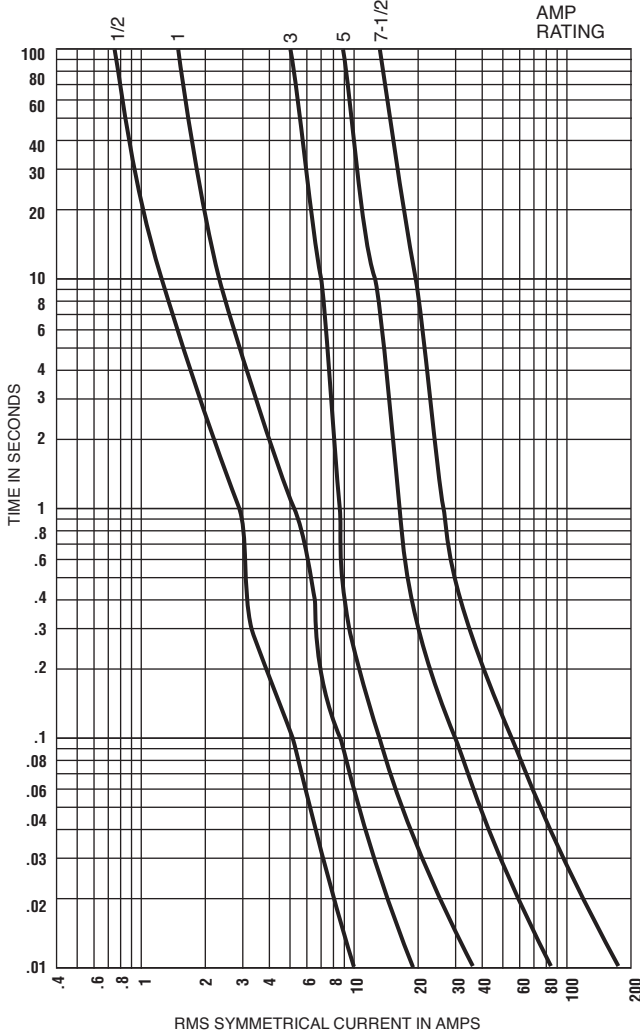

Cat. No. MEN (Amp)

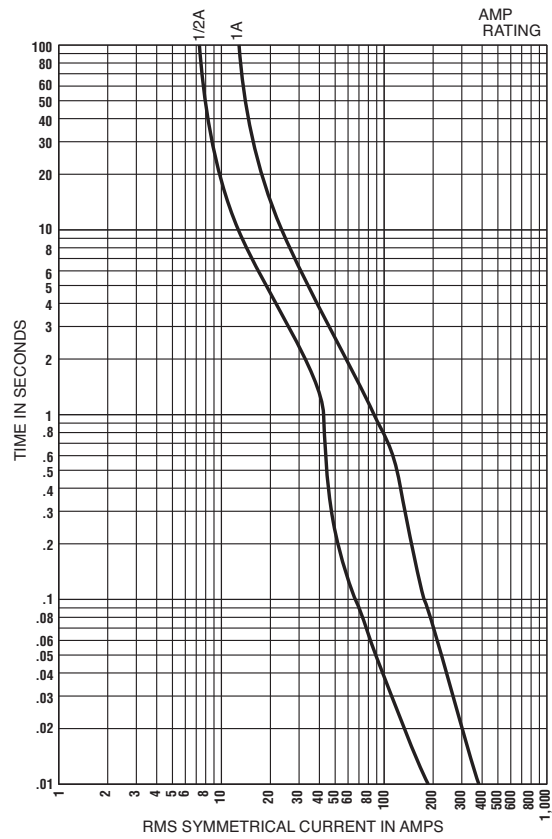

Cat. No. MID (Amp)

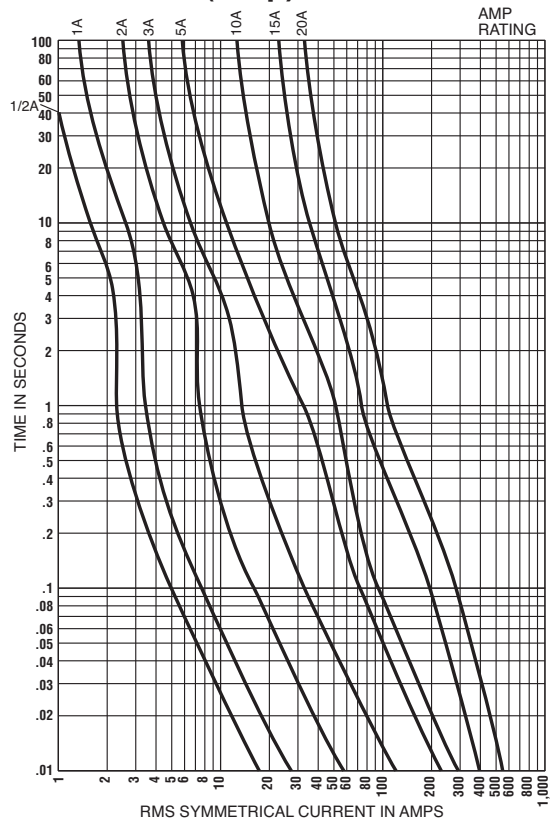



Catalog No. MEQ (0.1 - 30A)
500Vac or Less
Time-Delay

| Amp Ratings | | | | |
|-------------|-------|------|------|----|
| MEQ | | | | |
| 0.1 | 0.6 | 2.25 | 5.6 | 15 |
| 0.125 | 0.8 | 2.5 | 6 | 20 |
| 0.15 | 1 | 3 | 6.25 | 25 |
| 0.2 | 1.125 | 3.2 | 7 | 30 |
| 0.25 | 1.25 | 3.5 | 8 | — |
| 0.3 | 1.5 | 4 | 9 | — |
| 0.4 | 1.6 | 4.5 | 10 | — |
| 0.5 | 2 | 5 | 12 | — |

| Dimensions - inches | | |
|---------------------|---------|--------|
| Amps | Ferrule | Length |
| 0.1 - 30 | 13/32 | 1-1/2 |

MEQ Specifications

Time-Delay

Voltage Rating: 500Vac
Amp Rating: 0.1 - 30 Amps
Interrupting Rating: 10kA RMS Amps
Agency Approvals:
 (0.1 - 30) UL Listed, File E162443
 (0.1 - 30) CSA Cert, LR700489

Benefits:

- Compact dimensions.
- Fiber tube construction.
- Time-delay allows harmless inductive surges to pass without needless fuse opening.

Applications:

- Supplemental protection of transformers, solenoids, and other high inrush circuits.
- For motor applications, refer to EDCC.

Recommended Fuse Blocks: Page 151. **Recommended Inline Fuse Holders:** Page 147. **Recommended Panel Mount Holders:** Page 150.



Catalog No. MEN (0.1 - 30A)
250Vac or Less
Time-Delay

| Amp Ratings | | | | |
|-------------|-------|------|------|----|
| MEN | | | | |
| 0.1 | 0.8 | 2 | 4.5 | 10 |
| 0.15 | 1 | 2.25 | 5 | 12 |
| 0.2 | 1.125 | 2.5 | 5.6 | 15 |
| 0.25 | 1.25 | 2.8 | 6 | 20 |
| 0.3 | 1.4 | 3 | 6.25 | 25 |
| 0.4 | 1.5 | 3.2 | 7 | 30 |
| 0.5 | 1.6 | 3.5 | 8 | — |
| 0.6 | 1.8 | 4 | 9 | — |

| Dimensions - inches | | |
|---------------------|---------|--------|
| Amps | Ferrule | Length |
| 0.1 - 30 | 13/32 | 1-1/2 |

MEN Specifications

Time-Delay

Voltage Rating: 250Vac
Amp Rating: 0.5 - 30 Amps
Interrupting Rating: 10kA RMS Amps @ 125V
Agency Approvals:
 UL Listed, File E162443
 CSA Cert., LR700489

Benefits:

- Compact dimensions.
- Fiber tube construction.
- Dual-element construction allows harmless inductive surges to pass without opening.

Applications:

- Supplemental protection of small motors, transformers, solenoids, and other high inrush power electronic circuits.



Catalog No. MID (0.1 - 30A)
0.1 - 0.8A 250Vac or Less
1 - 15A 125Vac or Less
20 - 30A 32Vac or Less
Pin Indicating - Time-Delay

| Amp Ratings | | | | |
|-------------|-------|------|------|----|
| MID | | | | |
| 0.1 | 1 | 2.25 | 5.6 | 15 |
| 0.15 | 1.125 | 2.5 | 6 | 20 |
| 0.2 | 1.25 | 2.8 | 6.25 | 25 |
| 0.3 | 1.4 | 3 | 7 | 30 |
| 0.4 | 1.5 | 3.2 | 8 | — |
| 0.5 | 1.6 | 3.5 | 9 | — |
| 0.6 | 1.8 | 4 | 10 | — |
| 0.8 | 2 | 5 | 12 | — |

| Dimensions - inches | | |
|---------------------|---------|--------|
| Amps | Ferrule | Length |
| 0.1 - 30 | 13/32 | 1-1/2 |

NOTE: 12-30 amp is dual-tube construction.

MID Specifications

Pin Indicating — Time-Delay

Voltage Rating: 0.1 - 0.8 Amps, 250Vac
 1 - 15 Amps, 125Vac
 20 - 30 Amps, 32Vac
Amp Rating: 0.1 - 30 Amps

Interrupting Rating:
 10kA @ 125Vac (1/10-15A)
 1000A @ 32Vac (20-30A)
 35A @ 280Vac (1/10-8/10A)

Agency Approvals:
 UL Listed, File E162443
 CSA Cert., LR700489

Benefits:

- Compact dimensions.
- Silver-plated pin indicates when fuse is opened. Provides positive electrical signal activation.


Applications:

- Supplemental protection for high inrush power electronic circuits.


Recommended Fuse Blocks:
 Refer to page 135 in this catalog.

Average Time-Current Curve

Cat. No. MEQ (Amp)

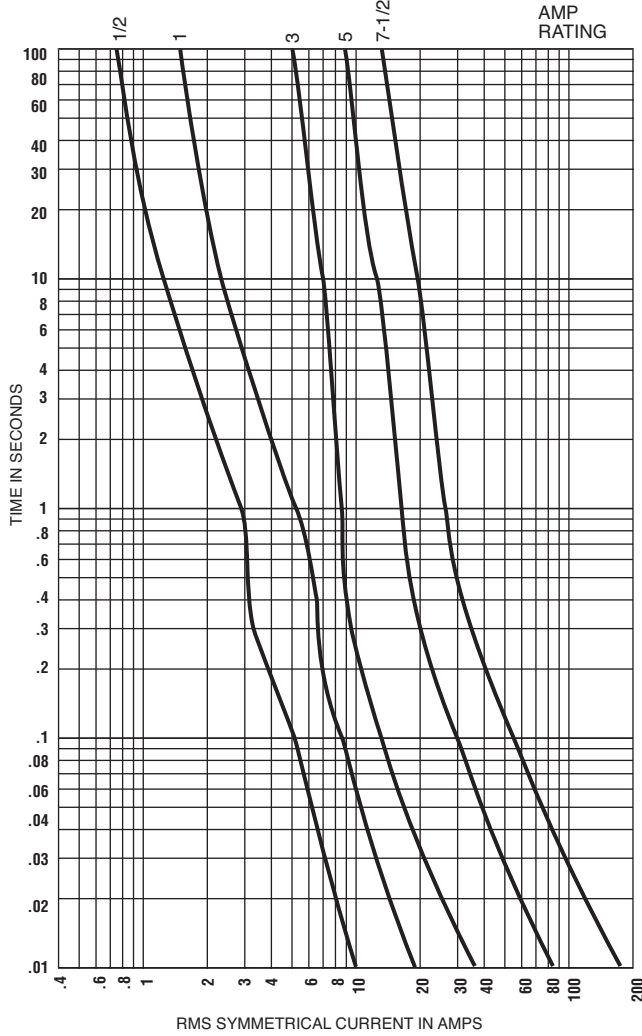

Cat. No. MEN (Amp)

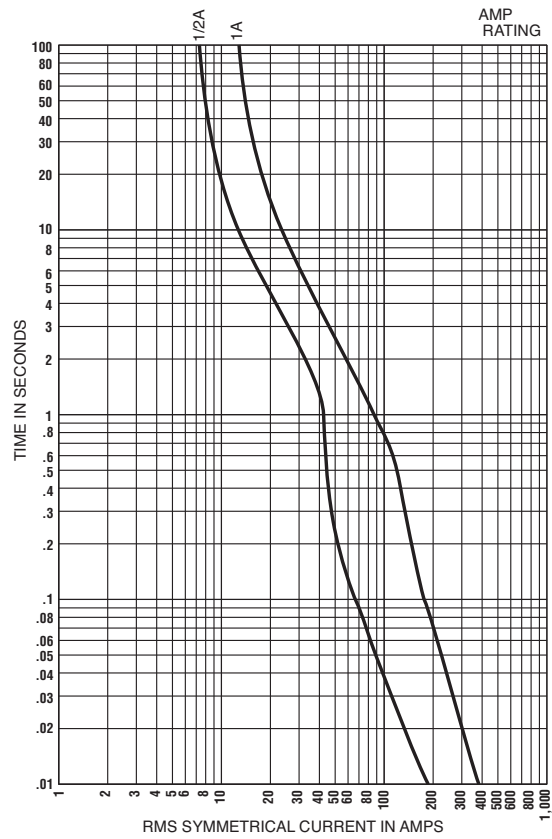

Cat. No. MID (Amp)

