


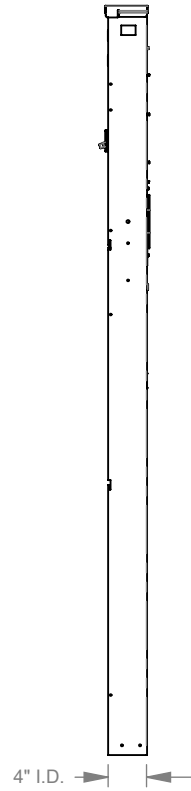


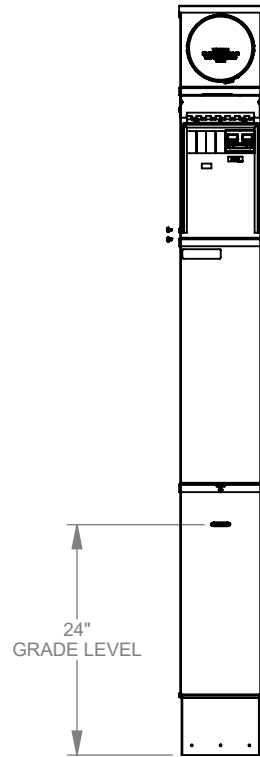

MPAP-200-MB-78

| | | | |
|-------------------------------|---|---------------------------|--|
| Catalog Number | MPAP-200-MB-78 | Mounting | Pedestal |
| Marketing Product Description | 4 Terminal Ring Type Plain Top 1-200 Ampere Main Breaker Single Pedestal Direct Bury Parallel Wired | Enclosure | G90 Galvanized Steel with Powder Coat Finish |
| UPC | 784572166400 | Jaw Quantity | 4 Terminal |
| Length (IN) | 4 | Bypass Type | No Bypass |
| Width (IN) | 8.156 | Number of Meter Positions | 1 Position |
| Height (IN) | 78 | Equipment Ground | Ground Bar |
| Brand Name | Milbank | Hub Opening | Plain Top |
| Type | Ring Type Meter Socket | Line Side Wire Range | 6 AWG - 350 kcmil |
| Application | Mobile Home Power | Number Branch Circuits | 4 |
| Standard | UL Listed;Type 3R | Number Of Receptacles | 0 |
| Voltage Rating | Up to 240 Volts Alternating Current | | |
| Amperage Rating | 200 Continuous Ampere | | |
| Phase | 1 Phase | | |
| Frequency Rating | 60 Hertz | | |
| Size | 4L x 8.156W x 78H | | |
| Number Of Cutouts | 1 | | |
| Cutout Size | One 200 Ampere Main Breaker | | |
| Cable Entry | Underground | | |
| Terminal | Double Mechanical | | |
| Insulation | Fiberglass with Resin | | |

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

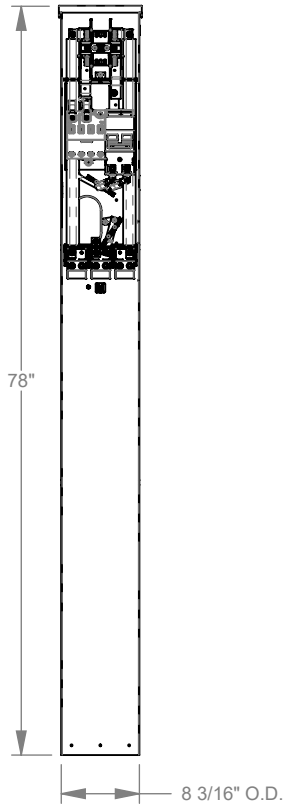

Version:
1

**All dimensions are +/- 1/16".
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.