



6" DELUXE UNIVERSAL TC HOUSING

INCANDESCENT LAMPS
TC2 SERIES

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

TC Housing design for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from all sides of the TC housing.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected – see pages 3-4.

Socket Medium base porcelain with nickel-plated copper screw shell
• Drop socket with spring to accommodate certain trim installation.

Trims Trim selection shown on pages 3-4.

Labels UL listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps or insulation • Union made • UL Listed/CSA certified • Trims 20, 21, 22, 239, 240, 241, 242, 243 and 9900 are wet location approved for covered ceiling applications • Trims 28, 29 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps.**

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.
Specifications subject to change without notice.

INSTALLATION

Real Nail® Bar Hangers Telescoping, Patented (US Patent D552,969) Real Nail 3 and Real Nail 2 systems permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications • Bars captive to mounting frame • Edge-mounted for extra strength • Quick-Loc slot (location identified on the mounting frame) and oversized locking set screw lock fixture in position • May be installed either perpendicular or parallel to junction box.

Real Nail 3 Bar Hanger Integral T-bar notch and clip secures housing in suspended ceiling grid – no accessory clips required • 24" expansion stop allows quick placement of fixture in standard grid spacing • Captive bugle-headed ring shank nail for quick one-step installation and easy removal with claw hammer for fixture relocation • Bar hanger foot contoured to align to bottom of construction joist • Alternate mounting holes included.


Real Nail 2 Bar Hanger (5 options) Small bar hanger foot designed to install directly on strapping construction material • Features Real Nail captive nail system for quick one-step installation • G2405 accessory clips required for suspended ceiling installation.

Junction Box Pre-wired junction box provided with (5) 1/2" and (1) 3/4" knockouts, (4) Non-metallic sheathed cable connectors and ground wire, U.L. listed/CSA certified for through-branch wiring, maximum 8 No. 12 AWG 90° C branch circuit conductors (4 in, 4 out) • Junction box provided with removable access plates • Knockouts equipped with pryout slots • **W options** are supplied with **push-in electrical connectors** for fast installation.

Mounting Frame 22-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation • Sight lines embossed on mounting frame to allow for easy viewing when aligning fixtures.

Housing TC housing, 22-gauge white painted steel • Housing is vertically adjustable to accommodate up to a 2" ceiling thickness.

DIMENSIONS

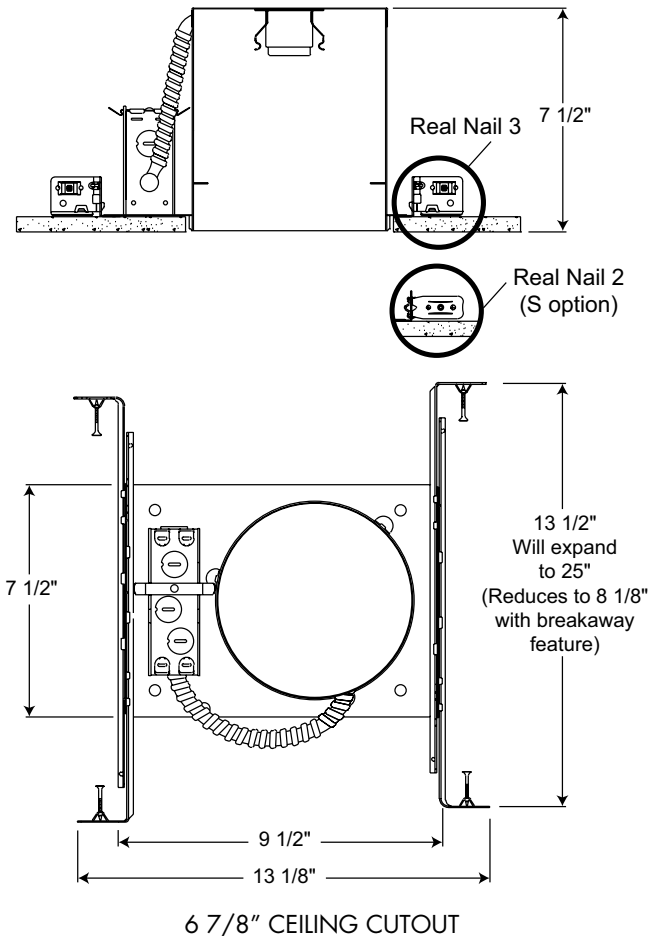

Accessories

Catalog Number	Description
G2405	T-Bar Clips (Set of 4), for S option only

To order, specify catalog number.

PRODUCT CODES
















Catalog Number	Input Voltage	Lamp Rating
TC2	6" Incandescent New Construction Non-IC Housing	120V
TC2 S	6" Incandescent New Construction Non-IC Housing with smaller footprint bar hanger (Real Nail 2)	120V
TC2 W	6" Incandescent New Construction Non-IC Housing with push-in electrical connectors for fast, secure installation	120V

Housing and trim can be ordered together or separate, but will always ship separately.

6" DELUXE UNIVERSAL TC HOUSING

INCANDESCENT LAMPS TC2 SERIES

TRIMS/LAMPS

	Catalog Number	Description	Max. Lamp Rating
	 23 BWH	6" Downlight Pinhole with Baffle Trim - Black Baffle, White Trim Ring	50W PAR20/R20
**	 24 BWH 24 BSC 24 BABZ 24 BBL 24 WWH	6" Downlight Tapered Baffle Trim - Black Baffle, White Trim Ring 6" Downlight Tapered Baffle Trim - Black Baffle, Satin Chrome Trim Ring 6" Downlight Tapered Baffle Trim - Black Baffle, Classic Aged Bronze Trim Ring 6" Downlight Tapered Baffle Trim - Black Baffle, Black Trim Ring 6" Downlight Tapered Baffle Trim - White Baffle, White Trim Ring	75W PAR30L, 65W BR30
**	 25 BWH 25 BSC 25 BABZ 25 BBL 25 WWH	6" Downlight Straight Baffle Trim - Black Baffle, White Trim Ring 6" Downlight Straight Baffle Trim - Black Baffle, Satin Chrome Trim Ring 6" Downlight Straight Baffle Trim - Black Baffle, Classic Aged Bronze Trim Ring 6" Downlight Straight Baffle Trim - Black Baffle, Black Trim Ring 6" Downlight Straight Baffle Trim - White Baffle, White Trim Ring	85W BR40, 90W PAR38
**	 26 CWH 26 GWH 26 BWH 26 PTSC 26 WWH 26 HZWH 26 WHZWH	6" Downlight Straight Cone Trim - Clear Alzak®, White Trim Ring 6" Downlight Straight Cone Trim - Gold, White Trim Ring 6" Downlight Straight Cone Trim - Black, White Trim Ring 6" Downlight Straight Cone Trim - Pewter, Satin Chrome Trim Ring 6" Downlight Straight Cone Trim - White, White Trim Ring 6" Downlight Straight Cone Trim - Haze, White Trim Ring 6" Downlight Straight Cone Trim - Wheat Haze, White Trim Ring	90W PAR38, 85W BR40
**	 27 CWH 27 GWH 27 BWH 27 PTSC 27 WWH 27 HZWH 27 WHZWH 27 WHZABZ	6" Downlight Tapered Cone Trim - Clear Alzak® Cone, White Trim Ring 6" Downlight Tapered Cone Trim - Gold Cone, White Trim Ring 6" Downlight Tapered Cone Trim - Black Cone, White Trim Ring 6" Downlight Tapered Cone Trim - Pewter Cone, Satin Chrome Trim Ring 6" Downlight Tapered Cone Trim - White Cone, White Trim Ring 6" Downlight Tapered Cone Trim - Haze Cone, White Trim Ring 6" Downlight Tapered Cone Trim - Wheat Haze Cone, White Trim Ring 6" Downlight Tapered Cone Trim - Wheat Haze Cone, Classic Aged Bronze Trim Ring	75W PAR30L, 65W BR30
	 28 BWH ◆◆ 28 WWH ◆◆	6" Downlight Ultra Trim Baffle Fully Enclosed Trim - Black Baffle, White Trim Ring 6" Downlight Ultra Trim Baffle Fully Enclosed Trim - White Baffle, White Trim Ring	75W A19, 100W PAR38, 75W PAR30/30L, 85W BR30, 120W BR40
	 29 CWH ◆◆ 29 WWH ◆◆	6" Downlight Ultra Trim Cone Fully Enclosed Trim - Clear Cone, White Trim Ring 6" Downlight Ultra Trim Cone Fully Enclosed Trim - White Cone, White Trim Ring	100W A19, 100W PAR38, 75W PAR30/30L, 85W BR30, 120W BR40
	 230 CBWH 230 CWWH	6" Downlight Economy A-Lamp Reflector with Baffle Trim - Clear with Black, Black Trim Ring 6" Downlight Economy A-Lamp Reflector with Baffle Trim - Clear with White, White Trim Ring	100W A19
	 232 CWH 232 GWH 232 WWH 232 HZWH 232 WHZWH	6" Downlight A-Lamp Reflector Trim - Clear Alzak®, White Trim Ring 6" Downlight A-Lamp Reflector Trim - Gold Alzak®, White Trim Ring 6" Downlight A-Lamp Reflector Trim - White, White Trim Ring 6" Downlight A-Lamp Reflector Trim - Haze, White Trim Ring 6" Downlight A-Lamp Reflector Trim - Wheat Haze, White Trim Ring	100W A19, 150W A21 100W A19, 150W A21 75W A19 100W A19, 150W A21 100W A19, 150W A21
	 233 CWH	6" Downlight A-Lamp Reflector with Black Baffle Trim - Clear Alzak®, White Trim Ring	75W A19
**	 244S BWH 244S WWH	6" Downlight Shallow Baffle Trim - Black Baffle, White Trim Ring 6" Downlight Shallow Baffle Trim - White Baffle, White Trim Ring	75W PAR30/30L, 65W BR30
**	 247S CWH 247S GWH 247S BWH 247S HZWH 247S WHZWH	6" Downlight Shallow Cone Trim - Clear Alzak® Cone, White Trim Ring 6" Downlight Shallow Cone Trim - Gold Alzak® Cone, White Trim Ring 6" Downlight Shallow Cone Trim - Black Alzak® Cone, White Trim Ring 6" Downlight Shallow Cone Trim - Haze Cone, White Trim Ring 6" Downlight Shallow Cone Trim - Wheat Haze Cone, White Trim Ring	75W PAR30/30L, 65W BR30
	 250 WH 250 SC 250 ABZ	6" Downlight Open Frame Trim - White 6" Downlight Open Frame Trim - Satin Chrome 6" Downlight Open Frame Trim - Classic Aged Bronze	65W BR30
	 251 WH	6" Downlight Open Frame Trim - White	120W BR40, 250W R40 Heat Lamp
**	 254 BWH 254 WWH	6" Downlight Deep Baffle Trim - Black Baffle, White Trim Ring 6" Downlight Deep Baffle Trim - White Baffle, White Trim Ring	75W PAR30, 100W PAR38

Trim Size: 7⁵/₈" O.D. (except Cat. Nos. 228, 229, 241, 9024 - 8" O.D., Cat. No. 9702 - 7³/₄" O.D.).

* Use dimmers specifically designed for low voltage magnetic transformers.

Alzak is a registered trademark of Alcoa Corp.
Note: In Canada when insulation is present, Type IC fixtures must be used.

◆ UL Listed for use in wet location.




















◆◆ UL Listed for use in wet location with outdoor rated lamp.

** NOTE: TR6 Trim Ring compatible with 24, 25, 26, 27, 244S, 247S, 254, 257, 264, 267, 9900 trims.



6" DELUXE UNIVERSAL TC HOUSING

INCANDESCENT LAMPS TC2 SERIES

TRIMS/LAMPS (cont.)

	Catalog Number	Description	Max. Lamp Rating
**	 257 CWH	6" Downlight Deep Cone Trim - Clear Alzak® Cone, White Trim Ring	75W PAR30, 100W PAR38
	257 BWH	6" Downlight Deep Cone Trim - Black Alzak® Cone, White Trim Ring	
	257 GWH	6" Downlight Deep Cone Trim - Gold Alzak® Cone, White Trim Ring	
	257 HZWH	6" Downlight Deep Cone Trim - Haze Cone, White Trim Ring	
	257 WHZWH	6" Downlight Deep Cone Trim - Wheat Haze Cone, White Trim Ring	
	 224 BWH	6" Adjustable Gimbal Ring in Baffle Trim - Black Baffle, White Trim Ring	75W PAR38/3 Side Prong
	224 WWH	6" Adjustable Gimbal Ring in Baffle Trim - White Baffle, White Trim Ring Can also be used w/med. screw base lamps	
	 226 BWH	6" Adjustable Cylinder Spotlight in Baffle Trim - Black Baffle, White Trim Ring	60W PAR16
	226 WWH	6" Adjustable Cylinder Spotlight in Baffle Trim - White Baffle, White Trim Ring	
	 228 WH	6" Adjustable Regressed Eyeball Trim - White	50W PAR20/R20
	229 WH	6" Adjustable Regressed Eyeball Trim - White	75W PAR30L, 65W BR30
	229 SC	6" Adjustable Regressed Eyeball Trim - Satin Chrome	
	229 ABZ	6" Adjustable Regressed Eyeball Trim - Classic Aged Bronze	
	229 BL	6" Adjustable Regressed Eyeball Trim - Black	
	 248 WWH	6" Adjustable Regressed Eyeball in Baffle Trim - White Baffle, White Trim Ring	50W PAR20/R20
	249 BWH	6" Adjustable Regressed Eyeball in Baffle Trim - Black Baffle, White Trim Ring	75W PAR30L, 65W BR30
	249 WWH	6" Adjustable Regressed Eyeball in Baffle Trim - White Baffle, White Trim Ring	
**	 264 BWH	6" Adjustable Tapered Baffle Trim - Black Baffle, White Trim Ring	75W PAR30
	264 WWH	6" Adjustable Tapered Baffle Trim - White Baffle, White Trim Ring	
**	 267 CWH	6" Adjustable Tapered Cone Trim - Clear Alzak® Cone, White Trim Ring	75W PAR30
	267 GWH	6" Adjustable Tapered Cone Trim - Gold Alzak® Cone, White Trim Ring	
	267 BWH	6" Adjustable Tapered Cone Trim - Black Alzak® Cone, White Trim Ring	
	267 HZWH	6" Adjustable Tapered Cone Trim - Haze Cone, White Trim Ring	
	267 WHZWH	6" Adjustable Tapered Cone Trim - Wheat Haze Cone, White Trim Ring	
	 20 WH ◆	6" Lensed Albalite Trim - White	40W A19
	20 PW ◆	6" Lensed Albalite Trim - Plastic White	
	240 WH ◆	6" Lensed Albalite with Reflector Trim - White	60W A19
	240 PW ◆	6" Lensed Albalite with Reflector Trim - Plastic White	
	 21 WH ◆	6" Lensed Drop Opal Trim - White	40W A19
	21 PW ◆	6" Lensed Drop Opal Trim - Plastic White	
	241 WH ◆	6" Lensed Drop Opal with Reflector Trim - White	60W A19
	241 PW ◆	6" Lensed Drop Opal with Reflector Trim - Plastic White	
	 242 WH ◆	6" Lensed Frosted Lens with Clear Center Trim - White	75W PAR38, 60W PAR38IR
	242 SC ◆	6" Lensed Frosted Lens with Clear Center Trim - Satin Chrome	
	242 ABZ ◆	6" Lensed Frosted Lens with Clear Center Trim - Classic Aged Bronze	
	 22 WH ◆	6" Lensed Fresnel Trim - White	40W A19
	 239 WH ◆	6" Lensed Frosted Lens Trim - White	40W A19
	 261 BWH	6" Wall Wash Scoop Trim -	40W A19
	261 WWH	6" Wall Wash Scoop Trim -	
	 243 WH ◆	6" Decorative Swirled Etched Opal Glass Trim - White	60W A19
	 9324 SC	6" Decorative Luminous Disc Frosted Trim - Satin Chrome	65W BR30
	 9702	6" Decorative Luminous Collar Frosted Trim - Luminous Collar (Frosted)	75W BR30
	 9024 WWH	6" Decorative Octagonal Trim - White, White Trim Ring	65W BR30
	 9524 SC	6" Decorative Metal Band Trim - Satin Chrome	65W BR30
**	 9900 WH ◆	6" Decorative Fluted Drop Opal Trim - White	60W A19

LOW VOLTAGE TRIMS WITH TRANSFORMER *

	Catalog Number	Description	Max. Lamp Rating
	424 BWH	6" Adjustable Pinhole with Baffle Trim - Black Baffle, White Trim Ring	35W MR16
	427 WWH	6" Adjustable Cylinder Spotlight in Baffle Trim - White Baffle, White Trim Ring	50W MR16

Trim Size: 7⁵/₈" O.D. (except Cat. Nos. 228, 229, 241, 9024 - 8" O.D., Cat. No. 9702 - 7³/₄" O.D.).

* Use dimmers specifically designed for low voltage magnetic transformers.

Alzak is a registered trademark of Alcoa Corp.
Note: In Canada when insulation is present, Type IC fixtures must be used.

◆ UL Listed for use in wet location.

◆◆ UL Listed for use in wet location with outdoor rated lamp.

** NOTE: TR6 Trim Ring compatible with 24, 25, 26, 27, 244S, 247S, 254, 257, 264, 267, 9900 trims.



6" DELUXE UNIVERSAL TC HOUSING

INCANDESCENT LAMPS
TC2 SERIES

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

TC Housing design for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from all sides of the TC housing.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected – see pages 3-4.

Socket Medium base porcelain with nickel-plated copper screw shell
• Drop socket with spring to accommodate certain trim installation.

Trims Trim selection shown on pages 3-4.

Labels UL listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps or insulation • Union made • UL Listed/CSA certified • Trims 20, 21, 22, 239, 240, 241, 242, 243 and 9900 are wet location approved for covered ceiling applications • Trims 28, 29 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps.**

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.
Specifications subject to change without notice.

INSTALLATION

Real Nail® Bar Hangers Telescoping, Patented (US Patent D552,969) Real Nail 3 and Real Nail 2 systems permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications • Bars captive to mounting frame • Edge-mounted for extra strength • Quick-Loc slot (location identified on the mounting frame) and oversized locking set screw lock fixture in position • May be installed either perpendicular or parallel to junction box.

Real Nail 3 Bar Hanger Integral T-bar notch and clip secures housing in suspended ceiling grid – no accessory clips required • 24" expansion stop allows quick placement of fixture in standard grid spacing • Captive bugle-headed ring shank nail for quick one-step installation and easy removal with claw hammer for fixture relocation • Bar hanger foot contoured to align to bottom of construction joist • Alternate mounting holes included.


Real Nail 2 Bar Hanger (5 options) Small bar hanger foot designed to install directly on strapping construction material • Features Real Nail captive nail system for quick one-step installation • G2405 accessory clips required for suspended ceiling installation.

Junction Box Pre-wired junction box provided with (5) 1/2" and (1) 3/4" knockouts, (4) Non-metallic sheathed cable connectors and ground wire, U.L. listed/CSA certified for through-branch wiring, maximum 8 No. 12 AWG 90° C branch circuit conductors (4 in, 4 out) • Junction box provided with removable access plates • Knockouts equipped with pryout slots • **W options** are supplied with **push-in electrical connectors** for fast installation.

Mounting Frame 22-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation • Sight lines embossed on mounting frame to allow for easy viewing when aligning fixtures.

Housing TC housing, 22-gauge white painted steel • Housing is vertically adjustable to accommodate up to a 2" ceiling thickness.

DIMENSIONS

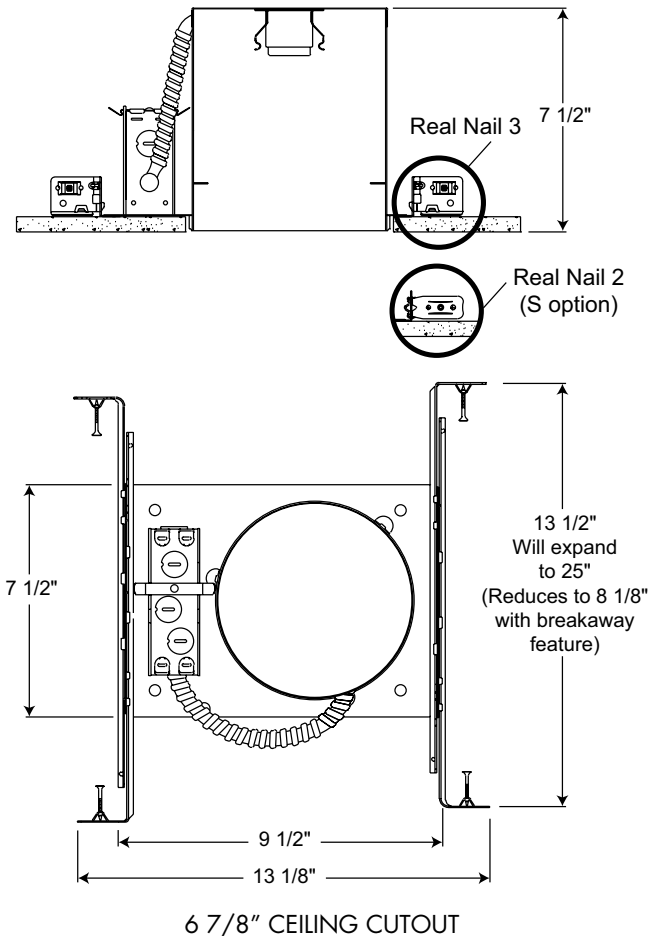

Accessories

Catalog Number	Description
G2405	T-Bar Clips (Set of 4), for S option only

To order, specify catalog number.

PRODUCT CODES
















Catalog Number	Input Voltage	Lamp Rating
TC2	6" Incandescent New Construction Non-IC Housing	120V
TC2 S	6" Incandescent New Construction Non-IC Housing with smaller footprint bar hanger (Real Nail 2)	120V
TC2 W	6" Incandescent New Construction Non-IC Housing with push-in electrical connectors for fast, secure installation	120V

Housing and trim can be ordered together or separate, but will always ship separately.

6" DELUXE UNIVERSAL TC HOUSING

INCANDESCENT LAMPS TC2 SERIES

TRIMS/LAMPS

	Catalog Number	Description	Max. Lamp Rating
	 23 BWH	6" Downlight Pinhole with Baffle Trim - Black Baffle, White Trim Ring	50W PAR20/R20
**	 24 BWH 24 BSC 24 BABZ 24 BBL 24 WWH	6" Downlight Tapered Baffle Trim - Black Baffle, White Trim Ring 6" Downlight Tapered Baffle Trim - Black Baffle, Satin Chrome Trim Ring 6" Downlight Tapered Baffle Trim - Black Baffle, Classic Aged Bronze Trim Ring 6" Downlight Tapered Baffle Trim - Black Baffle, Black Trim Ring 6" Downlight Tapered Baffle Trim - White Baffle, White Trim Ring	75W PAR30L, 65W BR30
**	 25 BWH 25 BSC 25 BABZ 25 BBL 25 WWH	6" Downlight Straight Baffle Trim - Black Baffle, White Trim Ring 6" Downlight Straight Baffle Trim - Black Baffle, Satin Chrome Trim Ring 6" Downlight Straight Baffle Trim - Black Baffle, Classic Aged Bronze Trim Ring 6" Downlight Straight Baffle Trim - Black Baffle, Black Trim Ring 6" Downlight Straight Baffle Trim - White Baffle, White Trim Ring	85W BR40, 90W PAR38
**	 26 CWH 26 GWH 26 BWH 26 PTSC 26 WWH 26 HZWH 26 WHZWH	6" Downlight Straight Cone Trim - Clear Alzak®, White Trim Ring 6" Downlight Straight Cone Trim - Gold, White Trim Ring 6" Downlight Straight Cone Trim - Black, White Trim Ring 6" Downlight Straight Cone Trim - Pewter, Satin Chrome Trim Ring 6" Downlight Straight Cone Trim - White, White Trim Ring 6" Downlight Straight Cone Trim - Haze, White Trim Ring 6" Downlight Straight Cone Trim - Wheat Haze, White Trim Ring	90W PAR38, 85W BR40
**	 27 CWH 27 GWH 27 BWH 27 PTSC 27 WWH 27 HZWH 27 WHZWH 27 WHZABZ	6" Downlight Tapered Cone Trim - Clear Alzak® Cone, White Trim Ring 6" Downlight Tapered Cone Trim - Gold Cone, White Trim Ring 6" Downlight Tapered Cone Trim - Black Cone, White Trim Ring 6" Downlight Tapered Cone Trim - Pewter Cone, Satin Chrome Trim Ring 6" Downlight Tapered Cone Trim - White Cone, White Trim Ring 6" Downlight Tapered Cone Trim - Haze Cone, White Trim Ring 6" Downlight Tapered Cone Trim - Wheat Haze Cone, White Trim Ring 6" Downlight Tapered Cone Trim - Wheat Haze Cone, Classic Aged Bronze Trim Ring	75W PAR30L, 65W BR30
	 28 BWH ◆◆ 28 WWH ◆◆	6" Downlight Ultra Trim Baffle Fully Enclosed Trim - Black Baffle, White Trim Ring 6" Downlight Ultra Trim Baffle Fully Enclosed Trim - White Baffle, White Trim Ring	75W A19, 100W PAR38, 75W PAR30/30L, 85W BR30, 120W BR40
	 29 CWH ◆◆ 29 WWH ◆◆	6" Downlight Ultra Trim Cone Fully Enclosed Trim - Clear Cone, White Trim Ring 6" Downlight Ultra Trim Cone Fully Enclosed Trim - White Cone, White Trim Ring	100W A19, 100W PAR38, 75W PAR30/30L, 85W BR30, 120W BR40
	 230 CBWH 230 CWWH	6" Downlight Economy A-Lamp Reflector with Baffle Trim - Clear with Black, Black Trim Ring 6" Downlight Economy A-Lamp Reflector with Baffle Trim - Clear with White, White Trim Ring	100W A19
	 232 CWH 232 GWH 232 WWH 232 HZWH 232 WHZWH	6" Downlight A-Lamp Reflector Trim - Clear Alzak®, White Trim Ring 6" Downlight A-Lamp Reflector Trim - Gold Alzak®, White Trim Ring 6" Downlight A-Lamp Reflector Trim - White, White Trim Ring 6" Downlight A-Lamp Reflector Trim - Haze, White Trim Ring 6" Downlight A-Lamp Reflector Trim - Wheat Haze, White Trim Ring	100W A19, 150W A21 100W A19, 150W A21 75W A19 100W A19, 150W A21 100W A19, 150W A21
	 233 CWH	6" Downlight A-Lamp Reflector with Black Baffle Trim - Clear Alzak®, White Trim Ring	75W A19
**	 244S BWH 244S WWH	6" Downlight Shallow Baffle Trim - Black Baffle, White Trim Ring 6" Downlight Shallow Baffle Trim - White Baffle, White Trim Ring	75W PAR30/30L, 65W BR30
**	 247S CWH 247S GWH 247S BWH 247S HZWH 247S WHZWH	6" Downlight Shallow Cone Trim - Clear Alzak® Cone, White Trim Ring 6" Downlight Shallow Cone Trim - Gold Alzak® Cone, White Trim Ring 6" Downlight Shallow Cone Trim - Black Alzak® Cone, White Trim Ring 6" Downlight Shallow Cone Trim - Haze Cone, White Trim Ring 6" Downlight Shallow Cone Trim - Wheat Haze Cone, White Trim Ring	75W PAR30/30L, 65W BR30
	 250 WH 250 SC 250 ABZ	6" Downlight Open Frame Trim - White 6" Downlight Open Frame Trim - Satin Chrome 6" Downlight Open Frame Trim - Classic Aged Bronze	65W BR30
	 251 WH	6" Downlight Open Frame Trim - White	120W BR40, 250W R40 Heat Lamp
**	 254 BWH 254 WWH	6" Downlight Deep Baffle Trim - Black Baffle, White Trim Ring 6" Downlight Deep Baffle Trim - White Baffle, White Trim Ring	75W PAR30, 100W PAR38

Trim Size: 7⁵/₈" O.D. (except Cat. Nos. 228, 229, 241, 9024 - 8" O.D., Cat. No. 9702 - 7³/₄" O.D.).

* Use dimmers specifically designed for low voltage magnetic transformers.

Alzak is a registered trademark of Alcoa Corp.
Note: In Canada when insulation is present, Type IC fixtures must be used.

◆ UL Listed for use in wet location.




















◆◆ UL Listed for use in wet location with outdoor rated lamp.

** NOTE: TR6 Trim Ring compatible with 24, 25, 26, 27, 244S, 247S, 254, 257, 264, 267, 9900 trims.



6" DELUXE UNIVERSAL TC HOUSING

INCANDESCENT LAMPS TC2 SERIES

TRIMS/LAMPS (cont.)

	Catalog Number	Description	Max. Lamp Rating
**	 257 CWH	6" Downlight Deep Cone Trim - Clear Alzak® Cone, White Trim Ring	75W PAR30, 100W PAR38
	257 BWH	6" Downlight Deep Cone Trim - Black Alzak® Cone, White Trim Ring	
	257 GWH	6" Downlight Deep Cone Trim - Gold Alzak® Cone, White Trim Ring	
	257 HZWH	6" Downlight Deep Cone Trim - Haze Cone, White Trim Ring	
	257 WHZWH	6" Downlight Deep Cone Trim - Wheat Haze Cone, White Trim Ring	
	 224 BWH	6" Adjustable Gimbal Ring in Baffle Trim - Black Baffle, White Trim Ring	75W PAR38/3 Side Prong
	224 WWH	6" Adjustable Gimbal Ring in Baffle Trim - White Baffle, White Trim Ring Can also be used w/med. screw base lamps	
	 226 BWH	6" Adjustable Cylinder Spotlight in Baffle Trim - Black Baffle, White Trim Ring	60W PAR16
	226 WWH	6" Adjustable Cylinder Spotlight in Baffle Trim - White Baffle, White Trim Ring	
	 228 WH	6" Adjustable Regressed Eyeball Trim - White	50W PAR20/R20
	229 WH	6" Adjustable Regressed Eyeball Trim - White	75W PAR30L, 65W BR30
	229 SC	6" Adjustable Regressed Eyeball Trim - Satin Chrome	
	229 ABZ	6" Adjustable Regressed Eyeball Trim - Classic Aged Bronze	
	229 BL	6" Adjustable Regressed Eyeball Trim - Black	
	 248 WWH	6" Adjustable Regressed Eyeball in Baffle Trim - White Baffle, White Trim Ring	50W PAR20/R20
	249 BWH	6" Adjustable Regressed Eyeball in Baffle Trim - Black Baffle, White Trim Ring	75W PAR30L, 65W BR30
	249 WWH	6" Adjustable Regressed Eyeball in Baffle Trim - White Baffle, White Trim Ring	
**	 264 BWH	6" Adjustable Tapered Baffle Trim - Black Baffle, White Trim Ring	75W PAR30
	264 WWH	6" Adjustable Tapered Baffle Trim - White Baffle, White Trim Ring	
**	 267 CWH	6" Adjustable Tapered Cone Trim - Clear Alzak® Cone, White Trim Ring	75W PAR30
	267 GWH	6" Adjustable Tapered Cone Trim - Gold Alzak® Cone, White Trim Ring	
	267 BWH	6" Adjustable Tapered Cone Trim - Black Alzak® Cone, White Trim Ring	
	267 HZWH	6" Adjustable Tapered Cone Trim - Haze Cone, White Trim Ring	
	267 WHZWH	6" Adjustable Tapered Cone Trim - Wheat Haze Cone, White Trim Ring	
	 20 WH ◆	6" Lensed Albalite Trim - White	40W A19
	20 PW ◆	6" Lensed Albalite Trim - Plastic White	
	240 WH ◆	6" Lensed Albalite with Reflector Trim - White	60W A19
	240 PW ◆	6" Lensed Albalite with Reflector Trim - Plastic White	
	 21 WH ◆	6" Lensed Drop Opal Trim - White	40W A19
	21 PW ◆	6" Lensed Drop Opal Trim - Plastic White	
	241 WH ◆	6" Lensed Drop Opal with Reflector Trim - White	60W A19
	241 PW ◆	6" Lensed Drop Opal with Reflector Trim - Plastic White	
	 242 WH ◆	6" Lensed Frosted Lens with Clear Center Trim - White	75W PAR38, 60W PAR38IR
	242 SC ◆	6" Lensed Frosted Lens with Clear Center Trim - Satin Chrome	
	242 ABZ ◆	6" Lensed Frosted Lens with Clear Center Trim - Classic Aged Bronze	
	 22 WH ◆	6" Lensed Fresnel Trim - White	40W A19
	 239 WH ◆	6" Lensed Frosted Lens Trim - White	40W A19
	 261 BWH	6" Wall Wash Scoop Trim -	40W A19
	261 WWH	6" Wall Wash Scoop Trim -	
	 243 WH ◆	6" Decorative Swirled Etched Opal Glass Trim - White	60W A19
	 9324 SC	6" Decorative Luminous Disc Frosted Trim - Satin Chrome	65W BR30
	 9702	6" Decorative Luminous Collar Frosted Trim - Luminous Collar (Frosted)	75W BR30
	 9024 WWH	6" Decorative Octagonal Trim - White, White Trim Ring	65W BR30
	 9524 SC	6" Decorative Metal Band Trim - Satin Chrome	65W BR30
**	 9900 WH ◆	6" Decorative Fluted Drop Opal Trim - White	60W A19

LOW VOLTAGE TRIMS WITH TRANSFORMER *

	Catalog Number	Description	Max. Lamp Rating
	424 BWH	6" Adjustable Pinhole with Baffle Trim - Black Baffle, White Trim Ring	35W MR16
	427 WWH	6" Adjustable Cylinder Spotlight in Baffle Trim - White Baffle, White Trim Ring	50W MR16

Trim Size: 7⁵/₈" O.D. (except Cat. Nos. 228, 229, 241, 9024 - 8" O.D., Cat. No. 9702 - 7³/₄" O.D.).

* Use dimmers specifically designed for low voltage magnetic transformers.

Alzak is a registered trademark of Alcoa Corp.
Note: In Canada when insulation is present, Type IC fixtures must be used.

◆ UL Listed for use in wet location.

◆◆ UL Listed for use in wet location with outdoor rated lamp.

** NOTE: TR6 Trim Ring compatible with 24, 25, 26, 27, 244S, 247S, 254, 257, 264, 267, 9900 trims.