



# Decorator Devices Wide Slide Series


Pass & Seymour




### Full-On Bypass

When the dimmer is placed in the full-On position, the dimming circuitry is bypassed by latching contacts. This feature allows for 100% lighting output and extends dimmer life by eliminating heat build-up.

| Features  |   |
|---|---|
| <ul style="list-style-type: none"> <li>Maximum ratings are for continuous full load.</li> <li>Many 1000W models fit standard Decorator plates.</li> <li>RFI suppression built in.</li> <li>Full-On bypass.</li> </ul> | <ul style="list-style-type: none"> <li>Preset "ON/OFF" switch automatically returns controlled lights to preset level without readjusting dimmer setting.</li> <li>600W maximum rated dimmers can be ganged without de-rating.</li> </ul> |

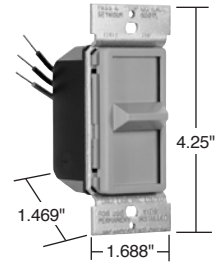

P 90680    P 90683  
N 90681

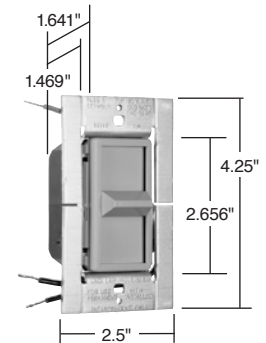

P 91180    P 91183  
N 91181

P = Preset  
N = Non-Preset


| Catalog Number  |  | Description | Ratings            | Color                                  |
|---|--|-------------|--------------------|--|
| Single Pole   | Three-Way                                  |             |                    |  |
| <b>600W Incandescent Specification Grade Slide Dimmers</b>  |  |             |                    |  |
| 90680I*<br>90680W*<br>90680GRY<br>90680LA*                  | 90683I*<br>90683W*<br>90683GRY<br>90683LA* | Preset      | 120V<br>600W max.  | Ivory<br>White<br>Gray<br>Light Almond |
| 90681I*<br>90681W*<br>90681GRY<br>90681LA*                  |  | Non-Preset  | 120V<br>600W max.  | Ivory<br>White<br>Gray<br>Light Almond |
| <b>1000W Incandescent Specification Grade Slide Dimmers</b> |  |             |                    |  |
| 91180I<br>91180W<br>91180GRY<br>91180LA                     | 91183I<br>91183W<br>91183GRY<br>91183LA    | Preset      | 120V<br>1000W max. | Ivory<br>White<br>Gray<br>Light Almond |
| 91181I<br>91181W<br>91181LA                                 |  | Non-Preset  | 120V<br>1000W max. | Ivory<br>White<br>Light Almond         |

\* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 90680IV.

| Max. Load<br>Rating    | Fins Removed |          |
|------------------------|--------------|----------|
|                        | One Side     | Two Side |
| <b>De-Rating Chart</b> |              |          |
| 1000W                  | 800W         | 700W     |

Note: Each side removed reduces plate size by 3/8".

### Slide Dimmer 3-Way Wiring Diagram

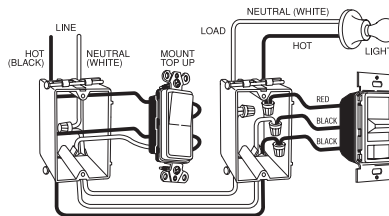



# Decorator Devices Wide Slide Series


Pass & Seymour




### Full-On Bypass

When the dimmer is placed in the full-On position, the dimming circuitry is bypassed by latching contacts. This feature allows for 100% lighting output and extends dimmer life by eliminating heat build-up.

| Features  |   |
|---|---|
| <ul style="list-style-type: none"> <li>Maximum ratings are for continuous full load.</li> <li>Many 1000W models fit standard Decorator plates.</li> <li>RFI suppression built in.</li> <li>Full-On bypass.</li> </ul> | <ul style="list-style-type: none"> <li>Preset "ON/OFF" switch automatically returns controlled lights to preset level without readjusting dimmer setting.</li> <li>600W maximum rated dimmers can be ganged without de-rating.</li> </ul> |

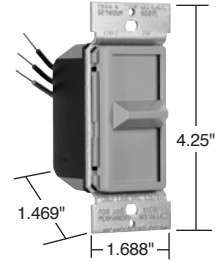

P 90680    P 90683  
N 90681

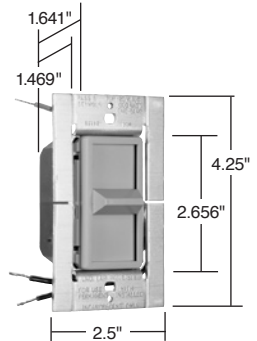

P 91180    P 91183  
N 91181

P = Preset  
N = Non-Preset

| Catalog Number  |  | Description | Ratings            | Color                                  |
|---|--|-------------|--------------------|--|
| Single Pole   | Three-Way                                  |             |                    |  |
| <b>600W Incandescent Specification Grade Slide Dimmers</b>  |  |             |                    |  |
| 90680I*<br>90680W*<br>90680GRY<br>90680LA*                  | 90683I*<br>90683W*<br>90683GRY<br>90683LA* | Preset      | 120V<br>600W max.  | Ivory<br>White<br>Gray<br>Light Almond |
| 90681I*<br>90681W*<br>90681GRY<br>90681LA*                  |  | Non-Preset  | 120V<br>600W max.  | Ivory<br>White<br>Gray<br>Light Almond |
| <b>1000W Incandescent Specification Grade Slide Dimmers</b> |  |             |                    |  |
| 91180I<br>91180W<br>91180GRY<br>91180LA                     | 91183I<br>91183W<br>91183GRY<br>91183LA    | Preset      | 120V<br>1000W max. | Ivory<br>White<br>Gray<br>Light Almond |
| 91181I<br>91181W<br>91181LA                                 |  | Non-Preset  | 120V<br>1000W max. | Ivory<br>White<br>Light Almond         |

\* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: 90680IV.

| Max. Load<br>Rating    | Fins Removed |          |
|------------------------|--------------|----------|
|                        | One Side     | Two Side |
| <b>De-Rating Chart</b> |              |          |
| 1000W                  | 800W         | 700W     |

Note: Each side removed reduces plate size by 3/8".

Slide Dimmer 3-Way Wiring Diagram

