




**MILBANK**  
ENERGY AT WORK

## U5059-X-2/200

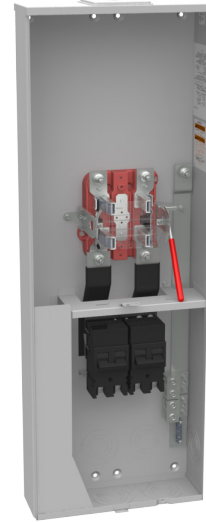


Catalog Number	U5059-X-2/200	Mounting	Surface Mount
Marketing Product Description	4 Terminal Ringless Large Closing Plate Lever Bypass 2-200 Ampere Main Breaker	Enclosure	G90 Galvanized Steel with Powder Coat Finish
UPC	784572310537	Jaw Quantity	4 Terminal
Length (IN)	4.844	Bypass Type	Lever Bypass
Width (IN)	15	Number of Meter Positions	1 Position
Height (IN)	42.438	Equipment Ground	Ground Bar
Brand Name	Milbank	Hub Opening	Large Closing Plate
Type	Ringless Meter Socket	Load Side Wire Range	1 AWG - 300 kcmil
Application	Meter Socket With Main	Number Of Receptacles	0
Standard	UL Listed;Type 3R		
Voltage Rating	Up to 240 Volts Alternating Current		
Amperage Rating	320 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.844L x 15W x 42.438H		
Number Of Cutouts	2		
Cutout Size	Two 200 Ampere Main Breakers		
Cable Entry	Overhead or Underground		
Terminal	3/8 Inch Stud		
Insulation	Glass Polyester		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



**MILBANK**  
ENERGY AT WORK

## U5059-X-2/200

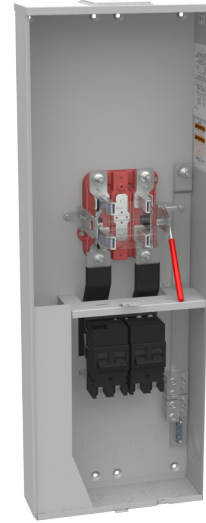

Catalog Number	U5059-X-2/200	Mounting	Surface Mount
Marketing Product Description	4 Terminal Ringless Large Closing Plate Lever Bypass 2-200 Ampere Main Breaker	Enclosure	G90 Galvanized Steel with Powder Coat Finish
UPC	784572310537	Jaw Quantity	4 Terminal
Length (IN)	4.844	Bypass Type	Lever Bypass
Width (IN)	15	Number of Meter Positions	1 Position
Height (IN)	42.438	Equipment Ground	Ground Bar
Brand Name	Milbank	Hub Opening	Large Closing Plate
Type	Ringless Meter Socket	Load Side Wire Range	1 AWG - 300 kcmil
Application	Meter Socket With Main	Number Of Receptacles	0
Standard	UL Listed;Type 3R		
Voltage Rating	Up to 240 Volts Alternating Current		
Amperage Rating	320 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.844L x 15W x 42.438H		
Number Of Cutouts	2		
Cutout Size	Two 200 Ampere Main Breakers		
Cable Entry	Overhead or Underground		
Terminal	3/8 Inch Stud		
Insulation	Glass Polyester		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.